



US005442489C1

(12) **EX PARTE REEXAMINATION CERTIFICATE (7427th)****United States Patent**
Yamamoto et al.(10) **Number:** **US 5,442,489 C1**(45) **Certificate Issued:** **Mar. 30, 2010**(54) **MAGNIFYING OBSERVATION APPARATUS**(75) **Inventors:** **Kiyokazu Yamamoto, Tokyo (JP);**
Masao Yamamoto, Tokyo (JP)(73) **Assignee:** **Scalar Corporation, Shibuya-Ku, Tokyo**
(JP)

3,561,432 A	• 2/1971	Yamaki et al.	600/167
3,582,181 A	6/1971	Dolores et al.	
3,638,643 A	2/1972	Hotchkiss	
3,884,222 A	5/1975	Moore	
4,157,216 A	6/1979	Plummer	
4,236,781 A	12/1980	Arimura	
4,288,690 A	9/1981	Sanner	

(Continued)

Reexamination Request:

No. 90/010,006, Aug. 6, 2007

Reexamination Certificate for:

Patent No.: **5,442,489**
Issued: **Aug. 15, 1995**
Appl. No.: **08/311,724**
Filed: **Sep. 23, 1994**

FOREIGN PATENT DOCUMENTS

JP	56-68870	6/1981
JP	59-088135	5/1984
JP	60-81645	5/1985
JP	61-296869	12/1986
JP	62-073877	4/1987

(Continued)

Certificate of Correction issued Jul. 30, 1996.

Related U.S. Application Data

(63) Continuation-in-part of application No. 07/983,848, filed as application No. PCT/JP92/00836 on Jul. 2, 1992, now abandoned.

(30) **Foreign Application Priority Data**

Jul. 4, 1991	(JP)	3-059676
Jul. 4, 1991	(JP)	3-059677
Jul. 4, 1991	(JP)	3-189569

(51) **Int. Cl.**
G02B 27/00 (2006.01)(52) **U.S. Cl.** **359/810; 348/E7.087; 359/385;**
359/798; 359/800; 359/802(58) **Field of Classification Search** **None**
See application file for complete search history.(56) **References Cited****U.S. PATENT DOCUMENTS**

2,258,304 A	10/1941	Stanton
2,280,561 A	4/1942	Wappler
3,279,460 A	10/1966	Sheldon

OTHER PUBLICATIONS


Article entitled "Analysis, Test And Measurement Issue" published in Photonics, International Journal of Optics, Lasers, Fiber Optics, Electro-Optics, Imaging and Optical Computing, Oct. 1990, pp. 4, 5, 76.

Color Video Camera article published in The Dempa Shim-bun, Jun. 25, 1991 and English translation.

(Continued)

Primary Examiner—Minh T Nguyen(57) **ABSTRACT**

The present invention relates to a magnifying observation apparatus of a video type in which an image of an object to be observed which has been picked up by an image pick-up apparatus incorporating an imaging device therein is reproduced on a monitor display and observed. It is an object of the invention to attain a compact structure of the entire system so as to permit easy observation in a simple manner. According to the present invention, in order to achieve such object, not only the imaging device but also a control circuit unit for the imaging device, an optical system for focusing the image of the object to be observed on the imaging device, and a light-source lamp for lighting the object to be observed, are incorporated in the image pick-up apparatus.

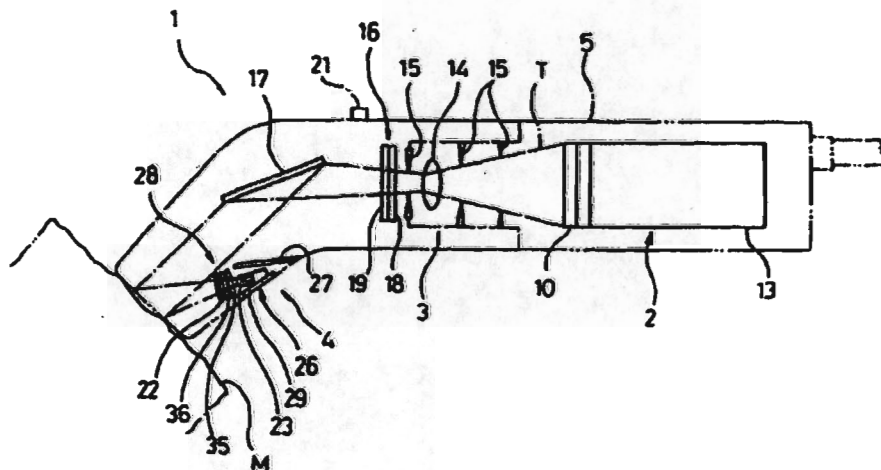

US 5,442,489 C1

Page 2

U.S. PATENT DOCUMENTS

4,310,228 A	1/1982	Terada
4,324,466 A	4/1982	Takayama
4,343,300 A	8/1982	Hattori
4,413,278 A	11/1983	Feinbloom
4,414,608 A	11/1983	Furihata
4,461,558 A	7/1984	Tanikawa et al.
4,475,540 A	10/1984	Takamatsu et al.
4,561,429 A	12/1985	Sato et al.
4,577,927 A	3/1986	Raney
4,590,923 A	5/1986	Watanabe
4,641,635 A	2/1987	Yabe
4,682,586 A	7/1987	Matsuo
4,727,416 A	2/1988	Cooper et al.
4,832,003 A	5/1989	Yabe
4,846,155 A	7/1989	Kimura
4,854,302 A	8/1989	Allred, III
4,858,001 A	8/1989	Milbank et al.
4,870,950 A	10/1989	Kanbara et al.
4,915,626 A	4/1990	Lemmey
4,947,245 A	8/1990	Ogawa et al.
4,989,083 A	1/1991	Eino
4,989,582 A	2/1991	Sakiyama et al.
4,993,405 A	2/1991	Takamura et al.
5,016,098 A	5/1991	Cooper et al.
5,027,138 A	6/1991	Gandrud
5,049,070 A	9/1991	Ademovic
5,115,261 A	5/1992	Noda et al.
5,115,307 A	5/1992	Cooper et al.
5,159,380 A	10/1992	Furuya et al.
5,191,369 A	3/1993	Furuya et al.
5,251,025 A	10/1993	Cooper et al.
5,267,087 A	11/1993	Weidemann
5,290,168 A	3/1994	Cooper et al.
5,429,502 A	7/1995	Cooper et al.

FOREIGN PATENT DOCUMENTS

JP	62-086322	4/1987
JP	63-068807	3/1988
JP	63-142239	6/1988
JP	63-246731	10/1988
JP	2-36266	3/1990
JP	2-207401	8/1990
JP	2-282202	11/1990
JP	02-282202	11/1990
JP	3-135276	6/1991
JP	5-006983	1/1993

OTHER PUBLICATIONS

Article entitled "CCD—The Solid State Imaging Technology" published in Fairchild Catalog 1982–1983, by Frank H. Bower—3 pages.

Hayashi, Toshihiko, et al. Article entitled "Industrial CCD Camera" Electronics, 1989–7, pp. 62–69 and English translation.

English translations of JP 61–296869, JP 63–246731, JP 2–36266, 2–282202, 05–6983, 59–88135, 60–81645, 62–86322, 63–68807, 63–142239.

English language Abstracts of JP 2–207401 and JP 3–135276.

Article In The Dempa Shimbun, Sony To Release Micromini Camera For Industrial Use (1/6 As Large As Before), Jun. 25, 1991 ("Sony") (Exhibit 6).

Catalog For Fairchild Charge Coupled Device ("Fairchild") (Exhibit 7).

Article In Electronics, Industrial CCD Camera, Hayashi, Toshihiko, et al., 1989–7 ("Hayashi") (Exhibit 8).

Advertisement in Photonics, Philips CCD Imaging Modules, Oct. 1990, p. 77 ("Philips") (Exhibit 9).

* cited by examiner

US 5,442,489 C1

1
EX PARTE
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 307

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

The patentability of claim 6 is confirmed.

Claims 1, 7, 11, 16, 19, 23 and 28 are determined to be patentable as amended.

New claims 33-50 are added and determined to be patentable.

Claims 2-5, 8-10, 12-15, 17-18, 20-22, 24-27 and 29-32 were not reexamined.

1. A magnifying observation apparatus for reproducing an image of an object to be observed which has been picked up by an image pick-up apparatus onto a monitor display and observing it, said image pick-up apparatus having a structure with a case of an essentially one-handed [graspable] graspable size, said case having [a] *an uncovered* viewing hole formed therein and encasing therein at least an imaging device, a control circuit unit for the imaging device, an optical system for focusing the image of the object to be observed on the imaging device, and a light-source lamp [encases] *encased* by the casing for lighting the object to be observed through the viewing hole.

7. A magnifying observation apparatus that includes an image pick-up apparatus for reproducing, onto a monitor display, an image of an object located proximate the image pick-up apparatus which has been picked up by an image pick-up apparatus the image pick-up apparatus including a casing having [a] *an uncovered* viewing hole formed therein and further including at least an imaging device, a control circuit unit for the imaging device, an optical system for focusing the image of [an] *the* object [to] located proximate the viewing hole on the imaging device, and a light-source lamp for lighting the object to be observed, wherein said light-source lamp is formed as a lamp unit comprising a plurality of lamps arranged in a predetermined state on a board in such a manner that the entire lamp unit can be mounted to and removed from said image pick-up apparatus.

11. A magnifying observation apparatus that includes an image pick-up apparatus for reproducing an image of an object located proximate the image pick-up apparatus onto a monitor display, said image pick-up apparatus comprising a casing having [a] *an uncovered* viewing hole, the casing enclosing at least an imaging device, a control circuit unit for processing a signal received from the imaging device and emitting a video signal, an optical system for focusing the image of [an] *the* object located proximate the viewing hole on the imaging device, and a light-source for lighting the object to be observed.

16. A magnifying observation apparatus that includes an image pick-up apparatus for reproducing an image of an object located proximate to the image pick-up apparatus

2

onto a monitor display, said image pick-up apparatus comprising a casing *having an uncovered viewing hole*, the casing enclosing at least an imaging device, a control circuit unit for the imaging device, an optical system for focusing the image of [an] *the* object onto the imaging device, and a light-source lamp means for lighting the object to be observed.

19. A magnifying observation apparatus according to claim 16, [further comprising a viewing hole formed in the casing and] wherein said optical system focuses the image of an object located proximate the viewing hole on the imaging device.

23. A magnifying observation apparatus that includes an image pick-up apparatus for reproducing an image of an object located proximate the image pick-up apparatus onto a monitor display, said image pick-up apparatus comprising a casing having [a] *an uncovered* viewing hole, the casing enclosing at least an imaging device, a control circuit unit for the imaging device, an optical system for focusing the image of [an] *the* object located proximate the viewing hole on the imaging device, the optical system comprising an objective lens that is movable to adjust magnification.

28. A magnifying observation apparatus that includes an image pick-up apparatus for reproducing an image of an object located proximate the image pick-up apparatus onto a monitor display, said image pick-up apparatus comprising a casing having [a] *an uncovered* viewing hole, an imaging device that is movable in relation to the viewing hole, the observation apparatus further comprising a control circuit unit for the imaging device, an optical system located in the image pick-up apparatus for focusing the image of [an] *the* object located proximate the viewing hole, the optical system comprising an objective lens that is movable to adjust magnification.

33. A magnifying observation apparatus according to claim 1, wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object to be observed on the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object to be observed.

34. A magnifying observation apparatus according to claim 1, wherein the light-source lamp is formed as a lamp unit comprising a plurality of lamps arranged in a predetermined state on a board in such a manner that the whole of the lamp unit can be mounted to said image pick-up apparatus.

35. A magnifying observation apparatus according to claim 1, wherein the viewing hole defines a geometric center, wherein the optical system defines an optical axis, and wherein the geometric center of the viewing hole and the optical axis of the optical system are collinear.

36. A magnifying observation apparatus according to claim 1, wherein the imaging device captures color images and sends the color images to the monitor display.

37. A magnifying observation apparatus according to claim 1, wherein the light-source lamp is formed as a lamp unit comprising a plurality of lamps mounted on a common board, wherein the common board is formed with a power supply circuit for supplying power to the plurality of lamps, and wherein each one of the plurality of lamps illuminates in response to electrical current.

US 5,442,489 C1

3

38. A magnifying observation apparatus according to claim 1, wherein the optical system includes a lens having a diameter and wherein the lens is spaced apart from the viewing hole by a distance greater than the diameter of the lens.

39. A magnifying observation apparatus according to claim 1, wherein the optical system defines an optical axis and wherein the light-source lamp comprises lamps mounted at an angle to the optical axis.

40. A magnifying observation apparatus according to claim 1, wherein the light-source lamp comprises a plurality of light elements mounted on a single circuit board.

41. A magnifying observation apparatus according to claim 1, wherein the optical system and the light-source lamp are exposed through the viewing hole to environmental conditions outside of the casing.

42. A magnifying observation apparatus according to claim 6, wherein the image pick-up apparatus has a case configured to be held and used by one hand and defines a viewing hole,

wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object to be observed on the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object to be observed.

43. A magnifying observation apparatus according to claim 7, wherein the casing is configured to be held and used by one hand,

wherein the control circuit unit controls the imaging device, and

wherein the optical system is configured to focus the image of the object on the imaging device and magnify the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object.

44. A magnifying observation apparatus according to claim 11, wherein the casing is configured to be held and used by one hand,

wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object on the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object.

45. A magnifying observation apparatus according to claim 16, wherein the casing is configured to be held and used by one hand,

4

wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object onto the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object.

46. A magnifying observation apparatus according to claim 23, wherein the casing is configured to be held and used by one hand,

wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object on the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object.

47. A magnifying observation apparatus according to claim 28, wherein the casing is configured to be held and used by one hand,

wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object on the imaging device and magnifies the image, while the image pick-up apparatus is maintained at a predetermined fixed distance from the object.

48. A magnifying observation apparatus according to claim 33, wherein the predetermined fixed distance is the distance between an outer edge of the viewing hole and the object to be observed.

49. A magnifying observation apparatus according to claim 1, wherein the viewing hole defines a plane and wherein the optical system is configured to focus on the plane so as to focus on the object when the object is abutted against the viewing hole.

50. A magnifying observation apparatus according to claim 1, wherein the control circuit unit controls the imaging device, and

wherein the optical system focuses the image of the object to be observed on the imaging device and magnifies the image, while the imaging device is maintained at a predetermined fixed distance from the object to be observed.

* * * * *