

EXHIBIT A

US007785302B2

(12) **United States Patent**
Powers(10) **Patent No.:** **US 7,785,302 B2**(45) **Date of Patent:** **Aug. 31, 2010**(54) **ACCESS PORT IDENTIFICATION SYSTEMS AND METHODS**(75) Inventor: **Kelly B. Powers**, North Salt Lake, UT (US)(73) Assignee: **C. R. Bard, Inc.**, Murray Hill, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1086 days.

(21) Appl. No.: **11/368,954**(22) Filed: **Mar. 6, 2006**(65) **Prior Publication Data**

US 2006/0247584 A1 Nov. 2, 2006

Related U.S. Application Data

(60) Provisional application No. 60/658,518, filed on Mar. 4, 2005.

(51) **Int. Cl.**
A61M 37/00 (2006.01)(52) **U.S. Cl.** **604/288.02**(58) **Field of Classification Search** 604/288.01,
604/288.02

See application file for complete search history.

(56) **References Cited****U.S. PATENT DOCUMENTS**

574,387 A	1/1897	Buckler	
611,357 A	9/1898	Dembinski	
966,696 A	8/1910	Merrill	
1,713,267 A	5/1929	Crowley	
2,029,553 A	2/1936	Bartschi et al.	
2,433,480 A	12/1947	Rendich	
2,891,689 A	6/1959	Gould	
D198,453 S	6/1964	Weichselbaum	
3,293,663 A	12/1966	Cronin	623/8

3,341,417 A	9/1967	Sinaiko	424/9,411
3,518,428 A	6/1970	Ring	
3,529,633 A	9/1970	Vailancourt	
3,643,358 A	2/1972	Morderosian	
3,829,904 A	8/1974	Ling et al.	
3,831,583 A	8/1974	Edmunds, Jr. et al.	128/899
3,840,009 A	10/1974	Michaels et al.	
3,891,997 A	7/1975	Herbert	

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 619 101 A1 10/1994

(Continued)

OTHER PUBLICATIONS



MedComp "PortCT Technology", display at SIR Conference (Mar. 2006), Toronto, Canada.

(Continued)

Primary Examiner—Nicholas D Lucchesi
Assistant Examiner—Aarti B Berdichevsky
 (74) *Attorney, Agent, or Firm*—Rutan & Tucker, LLP

(57) **ABSTRACT**

An access port for subcutaneous implantation is disclosed. Such an access port may comprise a body for capturing a septum for repeatedly inserting a needle therethrough into a cavity defined within the body. Further, the access port may include at least one feature structured and configured for identification of the access port subsequent to subcutaneous implantation. Methods of identifying a subcutaneously implanted access port are also disclosed. For example, a subcutaneously implanted access port may be provided and at least one feature of the subcutaneously implanted access port may be perceived. Further, the subcutaneously implanted access port may be identified in response to perceiving the at least one feature.

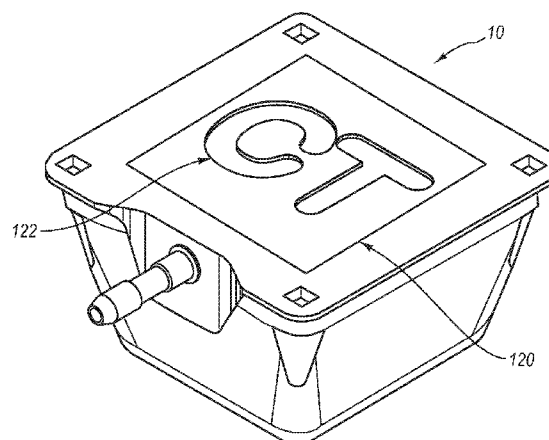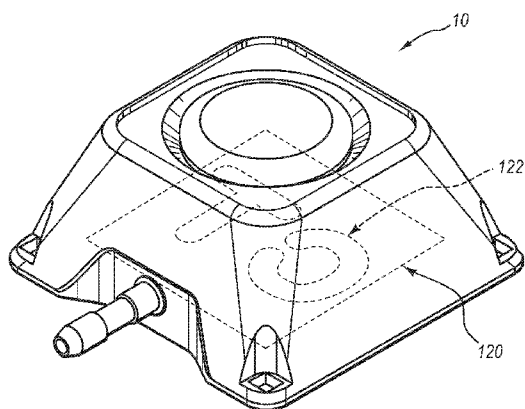10 Claims, 30 Drawing Sheets

US 7,785,302 B2

Page 2

U.S. PATENT DOCUMENTS			
3,915,162 A	10/1975	Miller	606/73
3,919,724 A	11/1975	Sanders et al.	
3,922,726 A	12/1975	Trentani et al.	
3,951,147 A	4/1976	Tucker et al.	
4,027,391 A	6/1977	Samis et al.	
4,035,653 A	7/1977	Karasko	
4,121,108 A	10/1978	Manor	
4,123,806 A	11/1978	Amstutz et al.	
4,168,586 A	9/1979	Samis	
4,190,040 A	2/1980	Schulte	128/899
4,190,057 A	2/1980	Hill et al.	
4,194,122 A	3/1980	Mitchell et al.	
4,202,349 A	5/1980	Jones	600/502
4,222,374 A	9/1980	Sampson et al.	
4,233,964 A	11/1980	Jefferts et al.	
4,274,006 A	6/1981	Caine	
4,349,498 A	9/1982	Ellis et al.	
4,361,153 A *	11/1982	Slocum et al.	607/32
4,405,305 A	9/1983	Stephen et al.	
4,406,567 A	9/1983	Samis et al.	
4,425,119 A	1/1984	Berglund	
4,445,896 A	5/1984	Gianturco	604/256
4,450,592 A	5/1984	Niederer et al.	
4,450,985 A	5/1984	Beard	
4,456,011 A	6/1984	Warnecke et al.	
4,469,483 A	9/1984	Becker et al.	
4,494,545 A *	1/1985	Slocum et al.	607/32
4,506,676 A	3/1985	Duska	
4,529,635 A	7/1985	Sheldon	
4,543,088 A	9/1985	Bootman et al.	604/288.02
4,549,879 A	10/1985	Groshong et al.	
4,559,046 A	12/1985	Groshong et al.	
4,571,749 A	2/1986	Fischell	
4,576,595 A	3/1986	Aas et al.	604/256
4,612,877 A	9/1986	Hayes et al.	
4,627,844 A	12/1986	Schmitt	
4,634,427 A	1/1987	Hannula et al.	
4,636,194 A	1/1987	Schulte et al.	
4,636,213 A	1/1987	Pakiam	623/8
4,645,495 A	2/1987	Vaillancourt	
4,653,508 A *	3/1987	Cosman	600/561
4,655,765 A	4/1987	Swift	
4,657,024 A	4/1987	Coneys	
4,662,652 A	5/1987	Hargis	
4,668,221 A	5/1987	Luther	
4,671,796 A	6/1987	Groshong et al.	
4,673,394 A	6/1987	Fenton et al.	604/175
4,684,365 A	8/1987	Reinicke	
4,685,447 A	8/1987	Iversen et al.	
4,685,905 A	8/1987	Jeanneret nee Aab	
4,692,146 A	9/1987	Hilger	
4,695,273 A	9/1987	Brown	604/173
4,697,595 A	10/1987	Breyer et al.	
4,701,166 A	10/1987	Groshong et al.	
4,704,103 A	11/1987	Stober et al.	604/174
4,710,174 A	12/1987	Moden et al.	
4,718,894 A	1/1988	Lazorthes	
4,728,894 A	3/1988	Yoda et al.	
4,743,231 A	5/1988	Kay et al.	
4,753,640 A	6/1988	Nichols et al.	
4,755,173 A	7/1988	Konopka et al.	
4,760,837 A	8/1988	Petit	
4,762,517 A	8/1988	McIntyre et al.	604/175
4,767,410 A	8/1988	Moden et al.	
4,772,270 A	9/1988	Wiita et al.	604/175
4,772,276 A	9/1988	Wiita et al.	604/533
4,773,552 A	9/1988	Boege et al.	
4,778,452 A	10/1988	Moden et al.	604/288.02
4,781,680 A	11/1988	Redmond et al.	604/288.02
4,781,685 A	11/1988	Lehmann et al.	
4,781,695 A	11/1988	Dalton	
4,802,885 A	2/1989	Weeks et al.	604/288.02
4,804,054 A	2/1989	Howson et al.	
4,820,273 A	4/1989	Reinicke	
4,822,341 A	4/1989	Colone	
4,840,615 A	6/1989	Hancock et al.	604/288.02
4,848,346 A	7/1989	Crawford	
4,857,053 A	8/1989	Dalton	604/288.02
4,861,341 A	8/1989	Woodburn	
4,863,470 A	9/1989	Carter	623/8
4,886,501 A	12/1989	Johnston et al.	
4,892,518 A	1/1990	Cupp et al.	
4,904,241 A	2/1990	Bark	
4,905,709 A	3/1990	Bieganski et al.	
4,909,250 A	3/1990	Smith	
4,915,690 A	4/1990	Cone et al.	
4,928,298 A	5/1990	Tanaka et al.	
4,929,236 A	5/1990	Sampson	426/288
4,955,861 A	9/1990	Enegren et al.	
4,963,133 A	10/1990	Whipple	
4,966,583 A	10/1990	Debbas	
4,973,319 A	11/1990	Melsky	
4,983,162 A	1/1991	Metais et al.	
5,009,644 A	4/1991	McDonald	604/175
5,013,298 A	5/1991	Moden et al.	
5,041,098 A	8/1991	Loiterman et al.	604/175
5,044,955 A	9/1991	Jagmin	433/229
5,045,060 A	9/1991	Melsky et al.	604/288.02
5,045,064 A	9/1991	Idriss	
5,084,015 A	1/1992	Moriuchi	604/288.02
5,085,216 A	2/1992	Henley, Jr. et al.	
5,090,066 A	2/1992	Schoepe et al.	
5,092,849 A	3/1992	Sampson	604/175
5,108,317 A	4/1992	Beinhaur et al.	
5,108,377 A	4/1992	Cone et al.	
5,112,301 A	5/1992	Fenton, Jr. et al.	
5,112,303 A	5/1992	Pudenz et al.	
5,129,891 A	7/1992	Young	
5,137,529 A	8/1992	Watson et al.	604/891.1
5,147,483 A	9/1992	Melsky et al.	
5,152,753 A	10/1992	Laguetta et al.	
5,156,600 A	10/1992	Young	
5,158,547 A	10/1992	Doan et al.	
5,167,629 A	12/1992	Vertenstein et al.	604/116
5,167,633 A	12/1992	Mann et al.	
5,167,638 A	12/1992	Felix et al.	
5,171,228 A	12/1992	McDonald	
5,176,653 A	1/1993	Metals et al.	
5,176,662 A	1/1993	Bartholomew et al.	
5,178,612 A	1/1993	Fenton, Jr.	
5,185,003 A	2/1993	Brethauer	604/288.02
5,189,690 A	2/1993	Samuel	378/162
5,193,106 A	3/1993	DeSena	
5,195,122 A	3/1993	Fabian	378/165
5,195,123 A	3/1993	Clement	
5,201,715 A	4/1993	Masters	
5,203,771 A	4/1993	Melker et al.	
5,203,777 A	4/1993	Lee	604/529
5,213,574 A	5/1993	Tucker	604/288.02
5,215,537 A	6/1993	Lynn et al.	
5,222,499 A	6/1993	Allen et al.	
D337,637 S	7/1993	Tucker	
5,224,938 A	7/1993	Fenton, Jr.	
5,263,930 A	11/1993	Ensminger	
5,281,205 A	1/1994	McPherson	604/267
5,290,263 A	3/1994	Wigness et al.	
5,295,658 A	3/1994	Atkinson et al.	251/149.1
5,299,253 A	3/1994	Wessels	
5,309,863 A	5/1994	Leeb, Jr.	
5,312,337 A	5/1994	Flaherty et al.	
5,318,545 A	6/1994	Tucker	604/244
5,320,100 A	6/1994	Herweck et al.	
5,328,480 A	7/1994	Melker et al.	
5,332,398 A	7/1994	Miller et al.	

US 7,785,302 B2

Page 3

5,336,194 A	8/1994	Polaschegg et al.	5,830,172 A	11/1998	Leveen et al.
5,338,398 A	8/1994	Szwejkowski et al. 438/720	5,833,654 A	11/1998	Powers et al. 604/93.01
5,350,360 A	9/1994	Ensminger et al.	5,835,563 A	11/1998	Navab et al.
5,352,204 A	10/1994	Ensminger	5,836,935 A	11/1998	Ashton et al.
5,360,407 A	11/1994	Leonard 604/175	5,840,063 A	11/1998	Flaherty
5,383,223 A	1/1995	Inokuchi et al.	5,843,069 A	12/1998	Butler et al. 604/891.1
5,383,233 A	1/1995	Russell 378/162	5,853,394 A	12/1998	Tolkoff et al.
5,383,858 A	1/1995	Reilly et al.	5,868,702 A	2/1999	Stevens et al.
D355,240 S	2/1995	Gladfelter et al.	5,882,353 A	3/1999	VanBeek et al.
5,387,192 A	2/1995	Glantz et al. 604/288.02	5,895,424 A	4/1999	Steele, Sr. et al.
5,394,457 A	2/1995	Leibinger et al.	5,906,596 A	5/1999	Tallarida
5,395,324 A	3/1995	Hinrichs et al.	5,908,414 A	6/1999	Otto et al.
5,397,329 A	3/1995	Allen	5,913,998 A	6/1999	Butler et al.
5,399,168 A	3/1995	Wadsworth, Jr. et al.	5,916,263 A	6/1999	Goicoechea et al.
5,405,402 A	4/1995	Dye et al. 623/22.38	5,925,017 A	7/1999	Kriesel et al.
5,417,565 A	5/1995	Long	5,925,030 A	7/1999	Gross et al.
5,417,656 A	5/1995	Ensminger et al.	5,928,197 A	7/1999	Niehoff
5,421,814 A	6/1995	Geary	5,931,829 A	8/1999	Burbank et al. 604/502
5,423,334 A	6/1995	Jordan	5,944,023 A	8/1999	Johnson et al.
5,425,762 A	6/1995	Muller	5,944,688 A	8/1999	Lois
5,456,698 A	10/1995	Byland et al.	5,944,712 A	8/1999	Frassica et al. 604/529
5,476,460 A	12/1995	Montalvo 604/891.1	5,947,953 A	9/1999	Ash et al.
5,476,880 A	12/1995	Cooke et al.	5,951,512 A	9/1999	Dalton
5,484,402 A	1/1996	Saravia et al.	5,951,522 A	9/1999	Rosato et al.
5,503,630 A	4/1996	Ensminger et al.	5,954,687 A	9/1999	Baudino
5,507,813 A	4/1996	Dowd et al.	5,957,890 A	9/1999	Mann et al.
5,509,805 A	4/1996	Jagmin 433/215	5,968,011 A	10/1999	Larsen et al.
5,513,637 A	5/1996	Twiss et al.	5,970,162 A	10/1999	Kawashima et al.
5,514,103 A	5/1996	Srisathapat et al.	5,989,216 A	11/1999	Johnson et al.
5,520,632 A	5/1996	Leveen et al.	5,989,239 A	11/1999	Finch et al. 64/502
5,527,277 A	6/1996	Ensminger et al.	5,997,524 A	12/1999	Burbank et al.
5,527,307 A	6/1996	Srisathapat et al.	6,007,516 A	12/1999	Burbank et al.
5,531,684 A	7/1996	Ensminger et al.	6,013,051 A	1/2000	Nelson
5,556,381 A	9/1996	Ensminger et al. 604/288.03	6,013,058 A	1/2000	Prosl et al.
5,558,641 A	9/1996	Glantz et al.	6,017,331 A	1/2000	Watts et al.
5,562,617 A	10/1996	Finch, Jr. et al.	6,022,335 A	2/2000	Ramadan
5,562,618 A	10/1996	Cai et al.	6,033,389 A	3/2000	Cornish
5,575,770 A	11/1996	Melsky et al.	6,039,712 A	3/2000	Fogarty et al. 604/288.02
5,607,393 A	3/1997	Ensminger et al.	6,077,756 A	6/2000	Lin et al.
5,607,407 A	3/1997	Tolkoff et al.	6,086,555 A	7/2000	Eliassen 604/93.01
5,613,945 A	3/1997	Cai et al.	6,090,066 A	7/2000	Schnell 604/86
5,620,419 A	4/1997	Lui et al. 604/116	6,102,884 A	8/2000	Squitieri
5,632,729 A	5/1997	Cai et al.	6,113,572 A	9/2000	Gailey et al.
5,637,102 A	6/1997	Tolkoff et al. 604/536	6,120,492 A	9/2000	Finch et al.
5,638,832 A	6/1997	Singer et al.	6,161,033 A	12/2000	Kuhn et al.
5,647,855 A	7/1997	Trooskin	6,171,198 B1	1/2001	Lizama Troncoso et al.
5,662,612 A	9/1997	Niehoff	6,171,298 B1	1/2001	Matsuura et al.
5,676,146 A	10/1997	Scarborough 600/431	6,190,352 B1	2/2001	Haarala et al.
5,695,490 A	12/1997	Flaherty et al. 604/891.1	6,193,684 B1	2/2001	Burbank et al. 604/29
5,702,128 A	12/1997	Maxim et al.	6,198,807 B1	3/2001	DeSena
5,702,363 A	12/1997	Flaherty	6,203,570 B1	3/2001	Baeke
5,704,915 A	1/1998	Melsky et al. 604/175	6,213,973 B1	4/2001	Eliassen et al. 604/93.01
5,709,668 A	1/1998	Wacks	6,228,088 B1	5/2001	Miller et al.
5,713,844 A	2/1998	Peyman	6,251,059 B1	6/2001	Apple et al.
5,713,858 A	2/1998	Heruth et al.	D445,175 S	7/2001	Bertheas
5,713,859 A	2/1998	Finch, Jr. et al.	6,269,148 B1	7/2001	Jessop et al.
5,718,382 A	2/1998	Jaeger	6,287,293 B1	9/2001	Jones et al. 604/891.1
5,718,682 A	2/1998	Tucker 604/288.02	6,290,677 B1	9/2001	Arai et al.
5,725,507 A	3/1998	Petrack	6,305,413 B1	10/2001	Fischer et al.
5,733,336 A	3/1998	Neuenfeldt et al.	D450,115 S	11/2001	Bertheas
5,733,400 A	3/1998	Gore et al.	6,332,874 B1	12/2001	Eliassen et al.
5,741,228 A	4/1998	Lambrecht et al.	6,355,021 B1	3/2002	Nielsen et al.
5,743,873 A	4/1998	Cai et al.	6,356,782 B1	3/2002	Sirimanne et al. 600/431
5,743,891 A	4/1998	Tolkoff et al.	6,361,557 B1	3/2002	Gittings et al.
5,746,460 A	5/1998	Marohl et al.	6,398,764 B1	6/2002	Finch, Jr. et al.
5,758,667 A	6/1998	Slettenmark	6,419,680 B1	7/2002	Cosman et al.
5,769,823 A	6/1998	Otto	6,450,937 B1	9/2002	Mercereau et al.
5,773,552 A	6/1998	Hutchings et al.	6,478,783 B1	11/2002	Moorehead
5,776,188 A	7/1998	Shepherd et al.	6,482,217 B1	11/2002	Pintor et al.
5,792,104 A	8/1998	Speckman et al. 604/288.02	6,494,867 B1	12/2002	Elver et al.
5,792,116 A	8/1998	Berg et al.	6,497,062 B1	12/2002	Koopman et al.
5,810,789 A	9/1998	Powers et al.	6,500,155 B2	12/2002	Sasso
5,824,071 A	10/1998	Nelson et al.	6,503,228 B1 *	1/2003	Li et al. 604/175

US 7,785,302 B2

Page 4

6,527,754 B1	3/2003	Tallarida et al.	604/288.04	7,377,915 B2	5/2008	Rasmussen et al.	
6,537,255 B1	3/2003	Raines		D574,950 S	8/2008	Zawacki et al.	
RE38,074 E	4/2003	Recinella et al.		7,413,564 B2	8/2008	Morris et al.	
6,582,418 B1	6/2003	Verbeck et al.		D578,203 S	10/2008	Bizup	
6,613,002 B1	9/2003	Clark et al.		7,445,614 B2	11/2008	Bunodiore et al.	
6,613,662 B2	9/2003	Wark et al.		D582,032 S	12/2008	Bizup et al.	
6,626,936 B2	9/2003	Stinson		7,465,847 B2	12/2008	Fabian	
6,629,950 B1	10/2003	Levin		D595,892 S	7/2009	Smith et al.	
6,632,217 B2	10/2003	Harper et al.		7,563,025 B2	7/2009	Kay	
6,652,486 B2	11/2003	Bialecki et al.		7,713,251 B2	5/2010	Tallarida et al.	
6,652,503 B1	11/2003	Bradley		2001/0016717 A1	8/2001	Haarala et al.	
6,676,633 B2	1/2004	Smith et al.		2001/0051766 A1	12/2001	Gazdzinski	
6,697,664 B2	2/2004	Kienzle III et al.		2001/0053889 A1	12/2001	Marggi et al.	
6,705,316 B2	3/2004	Blythe et al.		2001/0056266 A1	12/2001	Tallarida et al.	604/288.02
6,719,721 B1	4/2004	Okazaki et al.		2002/0095205 A1	7/2002	Edwin et al.	
6,719,739 B2	4/2004	Verbeek et al.		2002/0138068 A1	9/2002	Watson et al.	
6,738,531 B1	5/2004	Funahashi et al.		2002/0173769 A1	11/2002	Gray et al.	
6,755,842 B2	6/2004	Kanner et al.		2003/0028173 A1	2/2003	Forsberg	
6,758,841 B2	7/2004	Haarala et al.		2003/0130627 A1	7/2003	Smith et al.	
6,767,356 B2	7/2004	Kanner et al.		2003/0139812 A1	7/2003	Garcia et al.	
6,784,783 B2	8/2004	Scoggin et al.		2003/0181878 A1	9/2003	Tallarida et al.	
6,826,257 B2	11/2004	Sayre et al.		2003/0191452 A1	10/2003	Meglin et al.	
6,852,106 B2	2/2005	Watson et al.		2004/0020462 A1	2/2004	Sauler et al.	
6,878,136 B2	4/2005	Fleury et al.		2004/0044306 A1	3/2004	Lynch et al.	
6,878,137 B2	4/2005	Benchetrit		2004/0054352 A1	3/2004	Adams et al.	
6,949,084 B2	9/2005	Marggi et al.		2004/0056266 A1	3/2004	Suh et al.	
6,962,580 B2	11/2005	Adams et al.		2004/0064110 A1	4/2004	Forsell	
6,994,315 B2	2/2006	Ryan et al.		2004/0073196 A1	4/2004	Adams et al.	
6,997,914 B2	2/2006	Smith et al.		2004/0106878 A1	6/2004	Skujins et al.	
7,008,377 B2	3/2006	Beane et al.		2004/0106891 A1	6/2004	Langan et al.	
7,008,412 B2	3/2006	Maginot		2004/0157952 A1	8/2004	Soffiati et al.	
7,016,456 B2	3/2006	Basu et al.		2004/0158207 A1	8/2004	Hunn et al.	
7,018,361 B2	3/2006	Gillespie, Jr. et al.		2004/0167543 A1	8/2004	Mazzocchi et al.	
7,044,942 B2	5/2006	Jolly et al.		2004/0176743 A1	9/2004	Morris et al.	
7,056,316 B1	6/2006	Burbank et al.		2004/0199129 A1	10/2004	DiMatteo	
7,070,591 B2	7/2006	Adams et al.		2004/0199220 A1	10/2004	Cantlon	
7,072,704 B2	7/2006	Bucholz	600/407	2004/0204692 A1	10/2004	Eliassen	
7,074,232 B2	7/2006	Kanner et al.		2004/0225254 A1	11/2004	Tanaka et al.	
7,083,593 B2	8/2006	Stultz		2004/0254536 A1	12/2004	Conlon et al.	
7,108,686 B2	9/2006	Burke et al.		2004/0254537 A1	12/2004	Conlon et al.	
7,123,690 B1	10/2006	Brown et al.		2005/0049553 A1	3/2005	Triplett et al.	
7,127,040 B2	10/2006	Sayre et al.		2005/0070875 A1	3/2005	Kulesa	
7,131,962 B1	11/2006	Estabrook et al.		2005/0075614 A1	4/2005	Bunodiore et al.	604/288.02
7,140,769 B2	11/2006	Kay		2005/0113806 A1	5/2005	Murphree et al.	604/890.1
7,191,011 B2	3/2007	Cantlon	607/60	2005/0131352 A1	6/2005	Conlon et al.	
7,198,631 B2	4/2007	Kanner et al.		2005/0148866 A1	7/2005	Gunderson	
7,214,207 B2	5/2007	Lynch et al.		2005/0148956 A1	7/2005	Conlon et al.	
7,214,215 B2	5/2007	Heinzerling et al.		2005/0148957 A1	7/2005	Girard et al.	
7,223,257 B2	5/2007	Shubayev et al.		2005/0152841 A1	7/2005	Sayre et al.	
7,229,417 B2	6/2007	Foerster et al.		2005/0171502 A1	8/2005	Daly et al.	
7,235,067 B2	6/2007	Morris et al.		2005/0182857 A1	8/2005	Kong	710/1
D546,440 S	7/2007	Burnside		2005/0209573 A1	9/2005	Brugger et al.	
7,242,982 B2	7/2007	Singhal et al.		2005/0215874 A1	9/2005	Wang et al.	600/407
7,252,469 B2	8/2007	Zaluzec et al.		2005/0241203 A1	11/2005	Lizotte et al.	
7,252,649 B2	8/2007	Sherry	604/93.01	2005/0256451 A1	11/2005	Adams et al.	
7,261,705 B2	8/2007	Edoga et al.	524/544	2005/0256500 A1	11/2005	Fujii	
D554,253 S	10/2007	Kornerup et al.		2005/0277899 A1	12/2005	Conlon et al.	
7,275,682 B2	10/2007	Excoffier et al.		2005/0283119 A1	12/2005	Uth et al.	
7,276,075 B1	10/2007	Callas et al.		2006/0009788 A1	1/2006	Freeman et al.	
D556,153 S	11/2007	Burnside		2006/0017341 A1	1/2006	Hahn et al.	
7,306,579 B2	12/2007	Fujii		2006/0084929 A1	4/2006	Eliassen	
7,311,702 B2	12/2007	Tallarida et al.		2006/0089619 A1	4/2006	Ginggen	
7,318,816 B2	1/2008	Bobroff et al.		2006/0100592 A1	5/2006	Eliassen	
7,318,818 B2	1/2008	Yashiro et al.		2006/0116648 A1	6/2006	Hamatake	
7,322,953 B2	1/2008	Redinger		2006/0173410 A1	8/2006	Moberg et al.	
D562,443 S	2/2008	Zinn et al.		2006/0173424 A1	8/2006	Conlon	
7,331,130 B2	2/2008	Schweikert		2006/0178647 A1	8/2006	Stats	
7,331,948 B2	2/2008	Skarda		2006/0184141 A1	8/2006	Smith et al.	
7,333,013 B2 *	2/2008	Berger	340/539.12	2006/0184142 A1	8/2006	Schon et al.	
D564,449 S	3/2008	Dewberry		2006/0217359 A1	9/2006	Wentworth et al.	
7,347,838 B2	3/2008	Kulli		2006/0217659 A1	9/2006	Patton	604/93.01
7,347,843 B2	3/2008	Adams et al.		2006/0224128 A1	10/2006	Lurvey et al.	
7,351,233 B2	4/2008	Parks		2006/0224129 A1	10/2006	Beasley et al.	

US 7,785,302 B2

Page 5

2006/0247584	A1	11/2006	Sheetz et al.	
2006/0253076	A1	11/2006	Butts et al.	
2006/0264898	A1	11/2006	Beasley et al.	
2007/0007839	A1	1/2007	Lin	
2007/0049876	A1	3/2007	Patton	604/288.01
2007/0055290	A1	3/2007	Lober	
2007/0073250	A1	3/2007	Schneider	604/288.01
2007/0078391	A1	4/2007	Wortley et al.	604/116
2007/0078416	A1	4/2007	Eliassen	604/288.02
2007/0078432	A1	4/2007	Halseth et al.	604/500
2007/0083156	A1	4/2007	Muto et al.	604/93.01
2007/0149920	A1	6/2007	Michels et al.	
2007/0149921	A1	6/2007	Michels et al.	
2007/0161958	A1	7/2007	Glenn	604/175
2007/0179456	A1	8/2007	Glenn	
2007/0185462	A1	8/2007	Byrum	604/288.02
2007/0191773	A1	8/2007	Wojcik	
2007/0208313	A1	9/2007	Conlon et al.	
2007/0219510	A1	9/2007	Zinn et al.	
2007/0233017	A1	10/2007	Zinn et al.	604/288.01
2007/0233018	A1	10/2007	Bizup et al.	604/288.01
2007/0255234	A1	11/2007	Haase et al.	
2007/0270691	A1	11/2007	Bailey et al.	
2007/0270770	A1	11/2007	Bizup	
2007/0276344	A1	11/2007	Bizup et al.	
2007/0299408	A1	12/2007	Alferness et al.	
2008/0004642	A1	1/2008	Birk et al.	606/157
2008/0008654	A1	1/2008	Clarke et al.	
2008/0015701	A1	1/2008	Garcia et al.	
2008/0039820	A1	2/2008	Sommers et al.	
2008/0048855	A1	2/2008	Berger	
2008/0114308	A1	5/2008	di Palma et al.	
2008/0138387	A1	6/2008	Machiraju	
2008/0140025	A1	6/2008	Sheetz et al.	
2008/0208236	A1	8/2008	Hobbs et al.	
2008/0281279	A1	11/2008	Hoendervoogt et al.	
2008/0319398	A1	12/2008	Bizup	
2008/0319399	A1	12/2008	Schweikert et al.	
2008/0319405	A1	12/2008	Bizup	
2009/0024024	A1	1/2009	Zinn	
2009/0024098	A1	1/2009	Bizup et al.	
2009/0035582	A1	2/2009	Nakatani et al.	
2009/0118683	A1	5/2009	Hanson et al.	
2009/0156928	A1	6/2009	Evans et al.	
2009/0204072	A1	8/2009	Amin et al.	
2009/0204074	A1	8/2009	Powers et al.	
2009/0221976	A1	9/2009	Linden	
2009/0227862	A1	9/2009	Smith et al.	
2009/0227951	A1	9/2009	Powers et al.	
2010/0042073	A1	2/2010	Oster et al.	
2010/0069743	A1	3/2010	Sheetz et al.	

FOREIGN PATENT DOCUMENTS

EP	2006019101	A2	12/2006
JP	2006025948	A	2/2006
WO	WO-8600213		1/1986
WO	9305730	A1	4/1993
WO	WO97/01370		1/1997
WO	9706845	A1	2/1997
WO	9817337	A1	4/1998
WO	WO99/42166		8/1999
WO	0033901	A1	6/2000
WO	WO-02/47549		6/2002
WO	WO-0247549		6/2002
WO	WO 2004/004800	A2	1/2004
WO	2004071555	A2	8/2004
WO	2004091434	A2	10/2004
WO	2005037055	A2	4/2005
WO	2006078915	A2	7/2006
WO	2006096686	A1	9/2006
WO	2006116438	A2	11/2006
WO	2006130133	A1	12/2006

WO	2006134100	A1	12/2006
WO	WO-2007079024	A2	7/2007
WO	2007092210	A1	8/2007
WO	2007094898	A2	8/2007
WO	2007098771	A2	9/2007
WO	2007109164	A2	9/2007
WO	2007126645	A2	11/2007
WO	WO2007/136538		11/2007
WO	WO 2008/008126	A2	1/2008
WO	WO 2008/019236	A1	2/2008
WO	WO-2008048361		4/2008
WO	WO-2008/063226		5/2008
WO	2008147760	A1	12/2008
WO	2009002839	A1	12/2008
WO	WO-2008/157763		12/2008
WO	WO-2009/012385		1/2009
WO	WO-2009012395		1/2009
WO	WO-2009/035582		3/2009
WO	2009046725	A1	4/2009
WO	WO-2009/046439		4/2009
WO	2009108669	A1	9/2009

OTHER PUBLICATIONS

Cardiovascular and Interventional Radiology, Review Article, "Central Venous Access Catheters: Radiological Management of Complications," by U.K. Teichgraber, B. Gebauer, T. Benter, and H.J. Wagner, published online Jul. 31, 2003.

International Search Report and Written Opinion, dated Oct. 1, 2007, from PCT/US06/49007, filed Dec. 21, 2006.

European Patent Office Communication, dated Mar. 1, 2005, for Application No. 99 964 086.5-1257, Applicant STD Manufacturing, Inc.

European Patent Office communication, dated Mar. 30, 2005, for Application No. 99 964 086.5-1257, Applicant STD Manufacturing, Inc.

European Patent Office communication, dated Dec. 15, 2005, for Application No. 99 964 086.5-1257, Applicant STD Manufacturing, Inc.

Partial International Search Report dated Sep. 29, 2006 from related Patent Cooperation Treaty Application No. PCT/US2006/015695.

European Patent Office communication, dated Sep. 2, 2008, for Application No. 06 751 411.7-1526, Applicant C.R. Bard, Inc.

Non-Final Office Action issued on Feb. 13, 2008, in U.S. Appl. No. 11/320,223, filed Dec. 28, 2005.

Non-Final Office Action issued on Sep. 18, 2008, in U.S. Appl. No. 11/320,223, filed Dec. 28, 2005.

Non-Final Office Action issued on Jan. 16, 2009, in U.S. Appl. No. 11/380,124, filed Apr. 25, 2006.

International Search Report from related International Application No. PCT/US2006/008022, dated Jul. 5, 2006.

Nucleus Cochlear Implant Systems; User Manual for the ESprit 3G speech processor and accessories, Issue 2, Dec. 2001 <http://www.cochlearamericas.com/PDFs/UserManualSprint.pdf>.

BARD Access System product drawings representative of the BARD Access System products on the market on or around Mar. 1995 as indicated by the BARD Access Systems Mar. 21, 1995 Product Release to Market form for "M.R.I. Port with 8 Fr. ChronoFlex® Catheter," "M.R.I. Port with 8Fr. ChronoFlex Catheter with Intro-Eze™," "M.R.I. Port with 8. Fr ChronoFlex Catheter and Peel Apart," "M.R.I. Port with 8Fr. ChronoFlex Catheter Demo Kit." Product drawings included.

BioEnterics® LAP-BAND® "Adjustable Gastric Banding System" by Inamed Health. Product Brochure. Dec. 2003.

LaMaitre Vascular "Port Implantations: using the OptiLock Implantable Port" product information, http://www.lamaitre.com/specs_pop.asp. Apr. 2003.

LAP-BAND AP™ "System with Adjustable Gastric Banding System with OMNIFORM™ Design" Product Brochure. Jul. 2007.

LAP-BAND® "Adjustable Gastric Banding System" by BioEnterics Corporation. Product Brochure.

LAP-BAND® System Fact Sheet. © 2007 Allergan, Inc.

US 7,785,302 B2

Page 6

- Oct. 22, 2009 Declaration of Kelly Christian, Director of Product Development at BARD Access Systems, Inc. in support of and depicting a product on the market by Quinton Company approximately ten years ago.
- PORT-A CATH® "Implantable Epidural, Aterial and Peritoneal Access Systems" Internet Product Listing. <http://web.archive.org/web/20001119035900/www.deltec.com/cPacspl.htm>. Printed Oct. 17, 2009.
- PORT-A-CATH® "Many PORT-A-CATH® System Choices" Product Brochure. © 1996 SIMS Deltec, Inc.
- PORT-A-CATH® "Single-lumen Implantable Vascular Access Systems" Product Specifications. 2004 Smith Medical family of companies.
- Rappolt, Richard T., et al. "Radiopaque Codification and X-ray Identification of Ingested Drugs." *Ingestive Radiology*, May-Jun. 1966.
- Shah, Tilak M., "Radiopaque Polymer Formulations for Medical Devices." *Medical Device and Diagnostic Industry*, Mar. 2000.
- Urquiola, Javier, et al., "Using Lead Foil as a Radiopaque Marker for Computerized Tomography Imaging When Implant Treatment Planning." *The Journal of Prosthetic Dentistry*, 1997.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 Response to Office Action dated Dec. 28, 2006.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 Response to Office Action dated Jun. 20, 2008.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 Response to Office Action dated Mar. 30, 2009.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 Response to Office Action dated Sep. 21, 2009.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003; non-final Office Action, mailed May 20, 2009.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003; Office Action mailed Sep. 30, 2008.
- U.S. Appl. No. 11/320,223, filed Dec. 28, 2005 Final Office Action dated Jun. 19, 2009.
- U.S. Appl. No. 11/320,223, filed Dec. 28, 2005 Non-Final Office Action dated Jan. 21, 2010.
- U.S. Appl. No. 11/380,124, filed Apr. 25, 2006 Final Office Action dated Sep. 21, 2009.
- U.S. Appl. No. 11/380,124, filed Apr. 25, 2006 Non-Final Office Action dated Apr. 26, 2010.
- U.S. Appl. No. 11/380,621, filed Apr. 27, 2006 Final Office Action dated Jan. 14, 2010.
- U.S. Appl. No. 11/380,621, filed Apr. 27, 2006 Final Office Action dated Jan. 23, 2009.
- U.S. Appl. No. 11/380,621, filed Apr. 27, 2006 Non-Final Office Action dated Jul. 1, 2009.
- U.S. Appl. No. 11/380,621, filed Apr. 27, 2006 Non-Final Office Action dated Jun. 6, 2008.
- U.S. Appl. No. 11/725,287, filed Mar. 19, 2007; Non-final Office Action issued on Dec. 3, 2008.
- U.S. Appl. No. 11/725,287, filed Mar. 19, 2007; Non-final Office Action issued on Jun. 12, 2009.
- U.S. Appl. No. 11/725,287, filed Mar. 19, 2007; Non-final Office Action issued on Mar. 29, 2010.
- U.S. Appl. No. 12/023,280, filed Jan. 31, 2008 Final Office Action dated Mar. 9, 2010.
- U.S. Appl. No. 12/023,280, filed Jan. 31, 2008 Non-Final Office Action dated Jul. 23, 2009.
- U.S. Appl. No. 12/023,280, filed Jan. 31, 2008 Non-Final Office Action dated Oct. 5, 2009.
- U.S. Appl. No. 12/143,377, filed Jun. 20, 2008, Non-final Office Action mailed Apr. 27, 2009.
- U.S. Appl. No. 12/143,377, filed Jun. 20, 2008; Final Office Action mailed Oct. 19, 2009.
- U.S. Appl. No. 12/175,182, filed Jul. 17, 2008; Non-final Office Action mailed Sep. 3, 2009.
- U.S. Appl. No. 12/419,957, filed Apr. 7, 2009 Non-Final Office Action dated Feb. 18, 2010.
- U.S. Appl. No. 12/419,957, filed Apr. 7, 2009 Non-Final Office Action dated Jun. 30, 2009.
- U.S. Appl. No. 12/420,007, filed Apr. 7, 2009 Final Office Action dated Feb. 18, 2010.
- U.S. Appl. No. 12/420,007, filed Apr. 7, 2009 Non-Final Office Action dated Jul. 14, 2009.
- U.S. Appl. No. 29/239,163, filed Sep. 27, 2005.
- U.S. Appl. No. 29/247,954, filed Jul. 21, 2006 Non-Final Office Action dated Apr. 6, 2007.
- U.S. Appl. No. 29/247,954, filed Jul. 21, 2006 Notice of Allowability dated Jul. 30, 2007.
- U.S. Appl. No. 29/247,954, filed Jul. 21, 2006.
- U.S. Appl. No. 60/658,518, filed Mar. 4, 2005, publicly accessible Oct. 5, 2006.
- Vergara, et al., "Adverse Reactions to Contrast Media in CT: Effects of Temperature and Ionic Property." *Radiology*, vol. 199, No. 2, May 1996.
- Vogelzang, Robert L., "Power Injection Through Central Venous Catheters: Physiological and Hemodynamic Considerations." *The McGraw Medical Center of Northwestern University, Feinberg School of Medicine*.
- Wells, S., "Venous Access in Oncology and Haematology Patients: Part One." *Nursing Standard*, vol. 22, No. 52, pp. 39-46, Sep. 3, 2008.
- Williamson, et al., "Assessing the Adequacy of Peripherally Inserted Central Catheters for Power Injection of Intravenous Contrast Agents for CT." *Journal of Computer Assisted Tomography*, vol. 6, No. 6, pp. 932-937, 2001.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 Advisory Action dated Jan. 23, 2007.
- U.S. Appl. No. 10/374,000, filed Feb. 25, 2003 ; Non-final Office Action mailed Mar. 20, 2008.
- U.S. Food and Drug Administration, "Guidance for Institutional Review Boards and Clinical Investigators 1998 Update: Medical Devices." Version Sep. 10, 2008.
- Sullivan et al. "Radiopaque Markers on Mammary Implants." *American Journal of Roentgenology* 153(2):428, Aug. 1989.
- Steinbach, Barbara G., Hardt, N. Sisson, Abbott, Patricia L., Lanier, Linda, Caffee, H. Hollis, "Breast Implants, Common Complications, and Concurrent Breast Disease." *RadioGraphics*, vol. 13, No. 1, pp. 95-118, 1993.
- Soloman, et al., "CIN Strategies: Anticipate, Manage, Prevent." *Supplement to Imaging Economics*, May 2007.
- Smith, Lisa Hartkoph, "Implanted Ports, Computed Tomography, Power Injectors, and Catheter Rupture." *Clinical Journal of Oncology Nursing*, vol. 12, No. 5, Oct. 2008.
- Sanelli, et al., "Safety and Feasibility of Using a Central Venous Catheter for Rapid Contrast Injection Rates." *American Journal of Radiology*, vol. 183, pp. 1829-1834, Dec. 2004.
- Sandstede, Joern, "Pediatric CT," available online at www.multislice-ct.com, MultiSLICE-CT.com, version 02, May 2, 2003.
- Port-A-Cath P.A.S. PORT Systems by Deltec, Product Specifications, 1999.
- LAP-BAND System Access Port Fill Guide I, "9.75/10.0 cm LAP-BAND System vs. 11 cm LAP-BAND System: For Product Manufactured Prior to Jul. 2001" *BioEnterics Corporation*.
- Johnson, Kathleen A., "Power Injectable Portal Systems." *Journal of Radiology Nursing*, vol. 28, Issue 1, Mar. 2009.
- International Application No. PCT/US2009/062854 filed Oct. 30, 2009 Written Opinion dated Dec. 10, 2009.
- International Application No. PCT/US2009/062854 filed Oct. 30, 2009 International Search Report dated Dec. 10, 2009.
- "Extravasation of Radiologic Contrast." *PA-PSRS Patient Safety Advisory*—vol. 1, No. 3, Sep. 2004.
- Biffi, R., et al. "Use of totally implantable central venous access ports for high-dose chemotherapy and peripheral blood stem cell transplantation: results of a monocentre series of 376 patients." *Annals of Oncology* 15:296-300, 2004.
- Biffi, R., et al. "Best Choice of Central Venous Insertion Site for the Prevention of Catheter-Related Complications in Adult Patients Who Need Cancer Therapy: A Randomized Trial." *Annals of Oncology*, Jan. 29, 2009.
- Biffi, Roberto, et al. "A Randomized, Prospective Trial of Central Venous Ports Connected to Standard Open-Ended or Groshong Catheters in Adult Oncology Patients." *American Cancer Society*, vol. 92, No. 5, pp. 1204-1212, Sep. 1, 2001.

US 7,785,302 B2

Page 7

Costa, Nancy, "More Than Skin Deep: An Overview of Iodinated Contrast Media." *Journal for the Association for Vascular Access*, vol. 8, No. 4, 2003.

Costa, Nancy, "Understanding Contrast Media." *Journal of Infusion Nursing*, vol. 27, No. 5, Sep./Oct. 2004.

Extreme Access[®] Bard Access Systems, Inc. Product Brochure, 2003. Fallscheer, et al., "Injury to the Upper Extremity Caused by Extravasation of Contrast Medium: A True Emergency." *Scandinavian Journal of Plastic and Reconstructive Surgery and Hand Surgery*, vol. 41, pp. 26-32, 2007.

Hou, Shaw-Min et al. "Comparisons of Outcomes and Survivals for Two Central Venous Access Port Systems." *Journal of Surgical Oncology*, 91:61-66, 2005.

International Application No. PCT/US1999/028695 filed Dec. 3, 1999 International Preliminary Examination Report dated Apr. 21, 2001.

International Application No. PCT/US1999/028695 filed Dec. 3, 1999 International Search Report dated Apr. 11, 2000.

International Application No. PCT/US2006/008022 filed Mar. 6, 2006 International Preliminary Report on Patentability dated Dec. 9, 2007.

International Application No. PCT/US2006/008022 filed Mar. 6, 2006 Written Opinion dated Apr. 9, 2007.

International Application No. PCT/US2006/015695 filed Apr. 25, 2006 International Search Report dated Jan. 11, 2007.

International Application No. PCT/US2006/015695 filed Apr. 25, 2006 Written Opinion dated Oct. 27, 2007.

International Application No. PCT/US2006/016056 filed Apr. 27, 2006 International Preliminary Report on Patentability dated Oct. 30, 2007.

International Application No. PCT/US2006/016056 filed Apr. 27, 2006 International Search Report dated Sep. 20, 2006.

International Application No. PCT/US2006/016056 filed Apr. 27, 2006 Written Opinion dated Oct. 27, 2007.

International Application No. PCT/US2006/049007 filed Dec. 21, 2006 International Preliminary Report on Patentability dated Jul. 1, 2008.

International Application No. PCT/US2007/006776 (PCT Written opinion, dated Dec. 18, 2007).

International Application No. PCT/US2007/006776 International Preliminary Report on Patentability dated Jan. 2, 2009.

International Application No. PCT/US2007/006776 International Search Report, dated Dec. 18, 2007.

International Application No. PCT/US2007/011015 (International Preliminary Report on Patentability dated Oct. 29, 2008).

International Application No. PCT/US2007/011015 (PCT Search Report dated Jun. 10, 2008).

International Application No. PCT/US2007/011015 (PCT Written Opinion dated Jun. 10, 2008).

International Application No. PCT/US2007/011456 (PCT Search Report dated Aug. 28, 2008).

International Application No. PCT/US2007/011456 (PCT Written Opinion dated Aug. 28, 2008).

International Application No. PCT/US2008/010520 (PCT Search Report dated Feb. 24, 2009).

International Application No. PCT/US2008/010520 (PCT Written Opinion dated Feb. 24, 2009).

International Application No. PCT/US2008/067679; PCT Search Report mailed on Sep. 30, 2008.

International Application No. PCT/US2008/067679; PCT Written Opinion mailed on Sep. 30, 2008.

International Application No. PCT/US2008/070330 filed Jul. 17, 2008; PCT Search Report.

International Application No. PCT/US2008/070330 filed Jul. 17, 2008; PCT Written Opinion.

International Application No. PCT/US2008/070345; PCT Search Report mailed on Dec. 1, 2008.

International Application No. PCT/US2008/070345; PCT Written Opinion mailed on Dec. 1, 2008.

International Application No. PCT/US2008/078976 (PCT Search Report and Written Opinion dated Apr. 3, 2009).

U.S. Appl. No. 29/284,454, filed Sep. 7, 2007, titled Implantable Port Device, listing John A. Zawacki and Annemarie Boswell as inventors, in which a Continued Prosecution Application was filed on Jan. 30, 2008.

U.S. Appl. No. 29/284,456, filed Sep. 7, 2007, titled Implantable Port Device, listing John A. Zawacki and Annemarie Boswell as inventors. Office Action issued on Feb. 13, 2006, in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Response to Office Action dated May 12, 2006, filed in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1) in which a Continued Prosecution Application was filed on Jan. 30, 2008.

Office Action issued on Jul. 28, 2006, in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Response to Office Action dated Nov. 28, 2006, filed in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Office Action issued on Feb. 28, 2007, in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Response to Office Action dated May 28, 2007, filed in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Office Action issued on Aug. 28, 2007, in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

Response to Office Action dated Oct. 31, 2007, filed in U.S. Appl. No. 10/374,000 (published as U.S. Publication No. 2003/0181878 A1).

* cited by examiner

U.S. Patent

Aug. 31, 2010

Sheet 1 of 30

US 7,785,302 B2

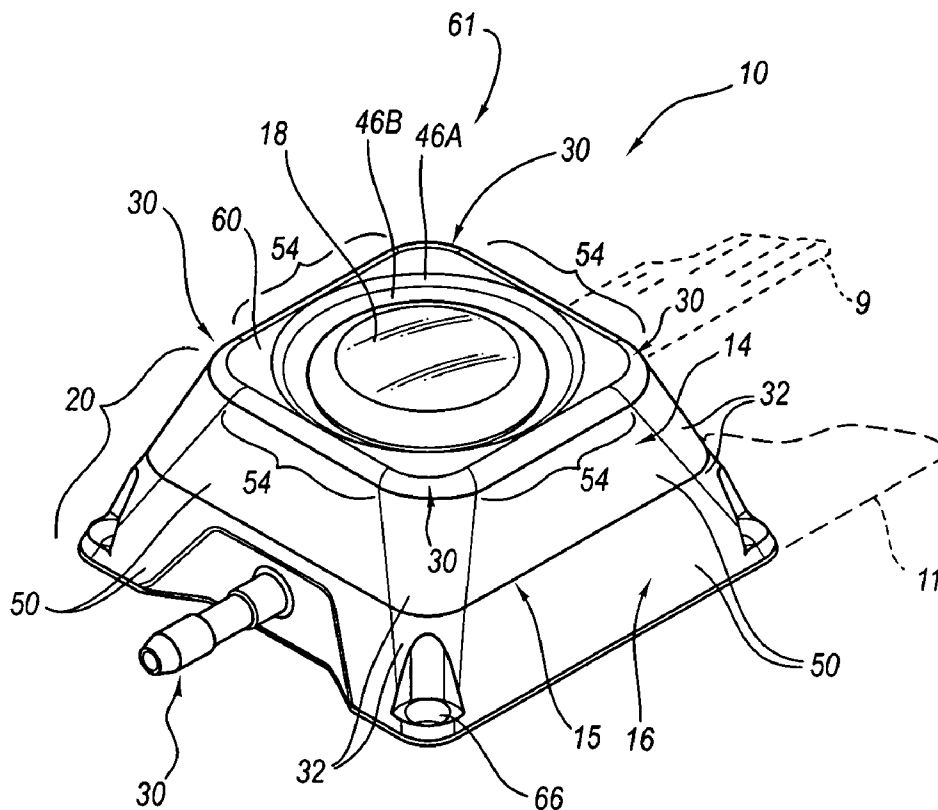


FIG. 1A

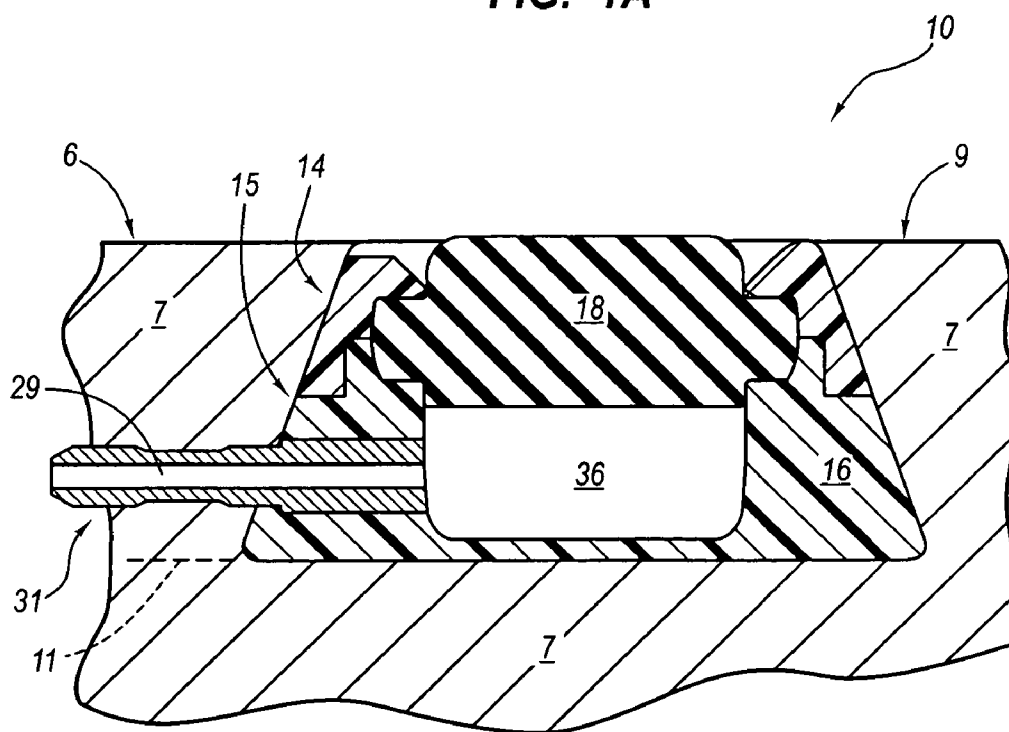


FIG. 1B

U.S. Patent

Aug. 31, 2010

Sheet 2 of 30

US 7,785,302 B2

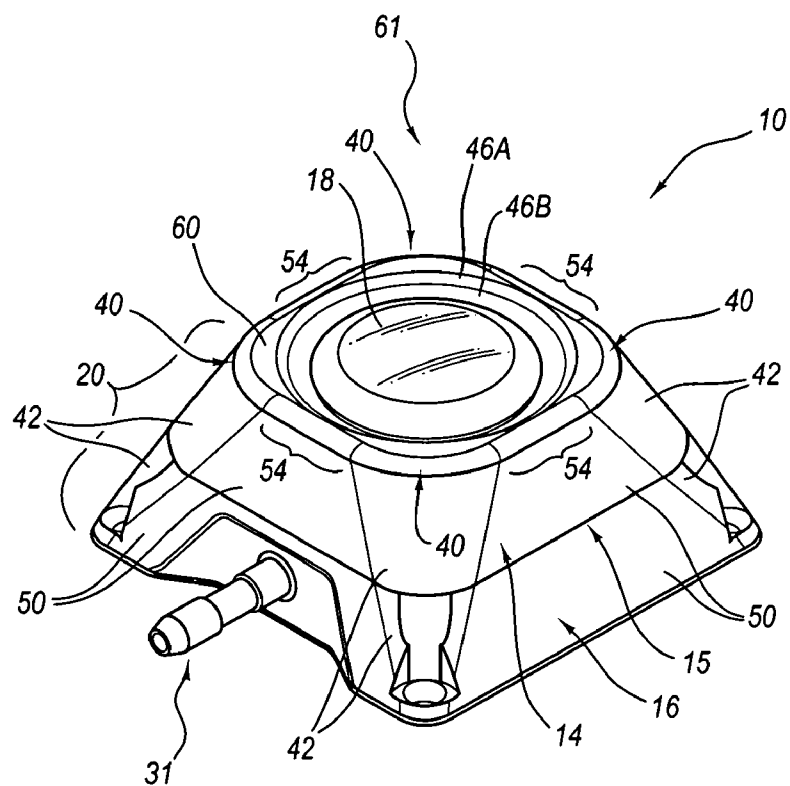


FIG. 2

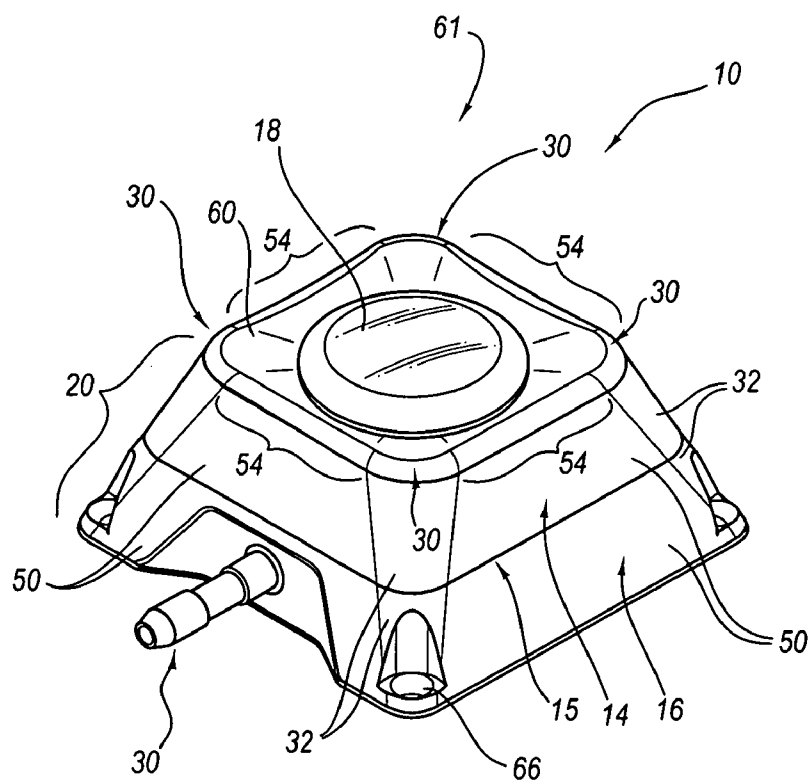


FIG. 3

U.S. Patent

Aug. 31, 2010

Sheet 3 of 30

US 7,785,302 B2

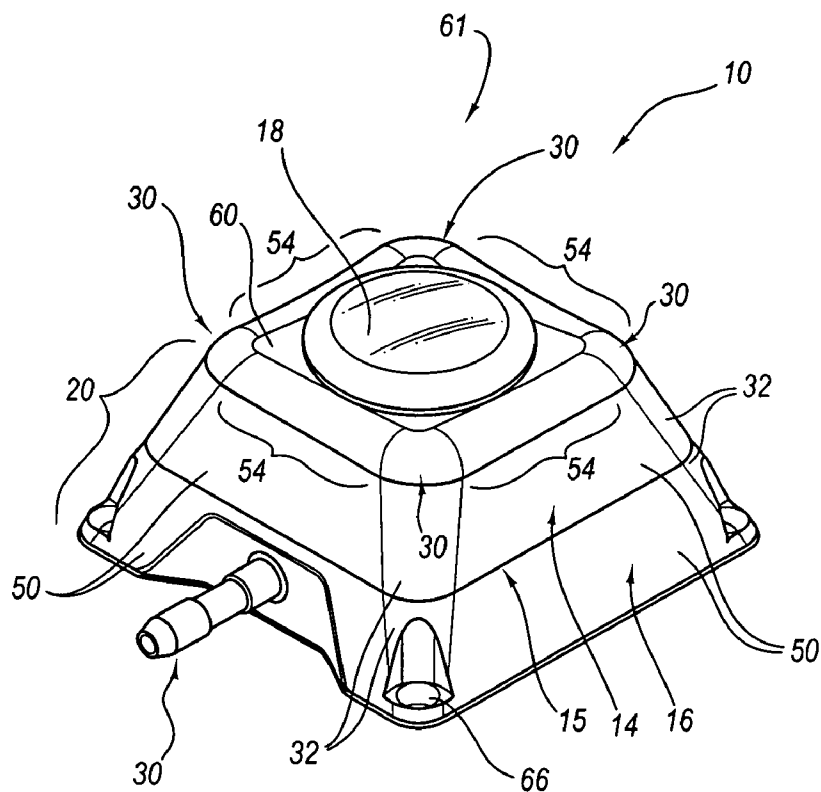


FIG. 4

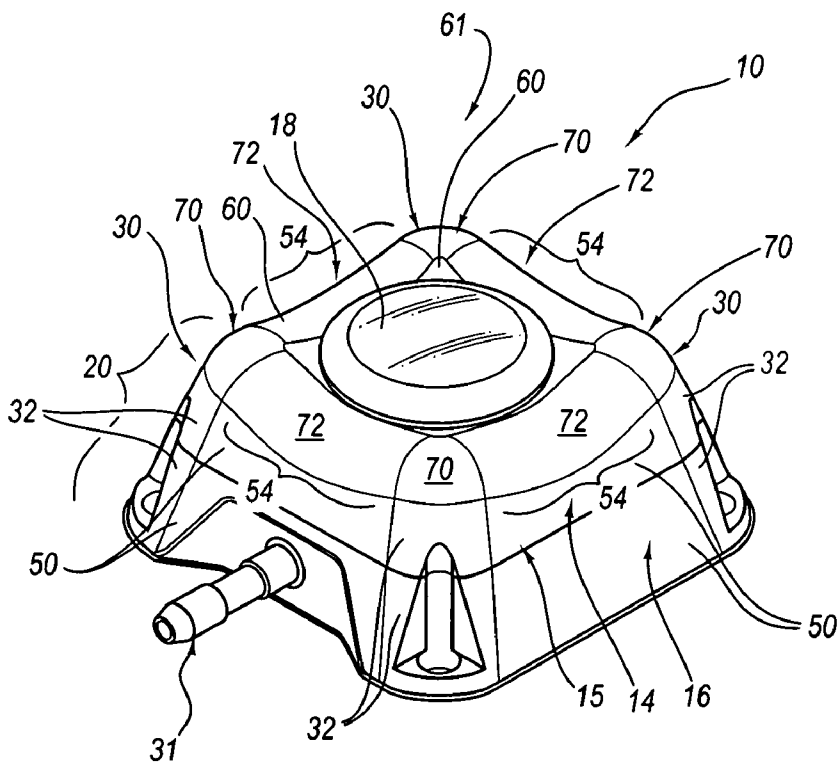


FIG. 5

U.S. Patent

Aug. 31, 2010

Sheet 4 of 30

US 7,785,302 B2

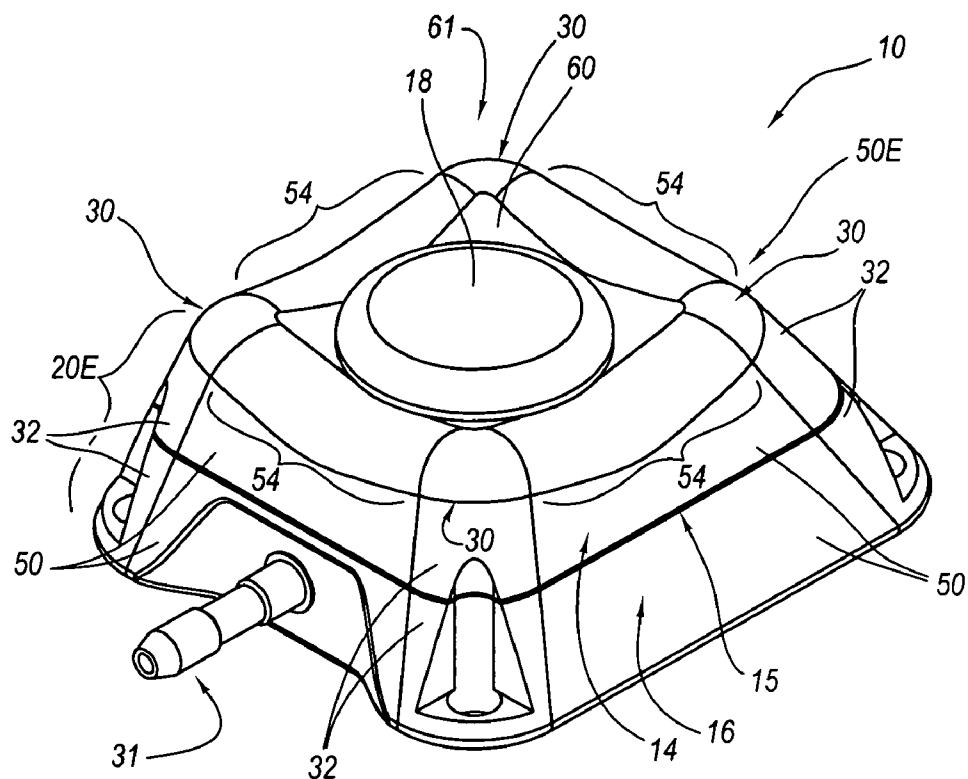


FIG. 6A

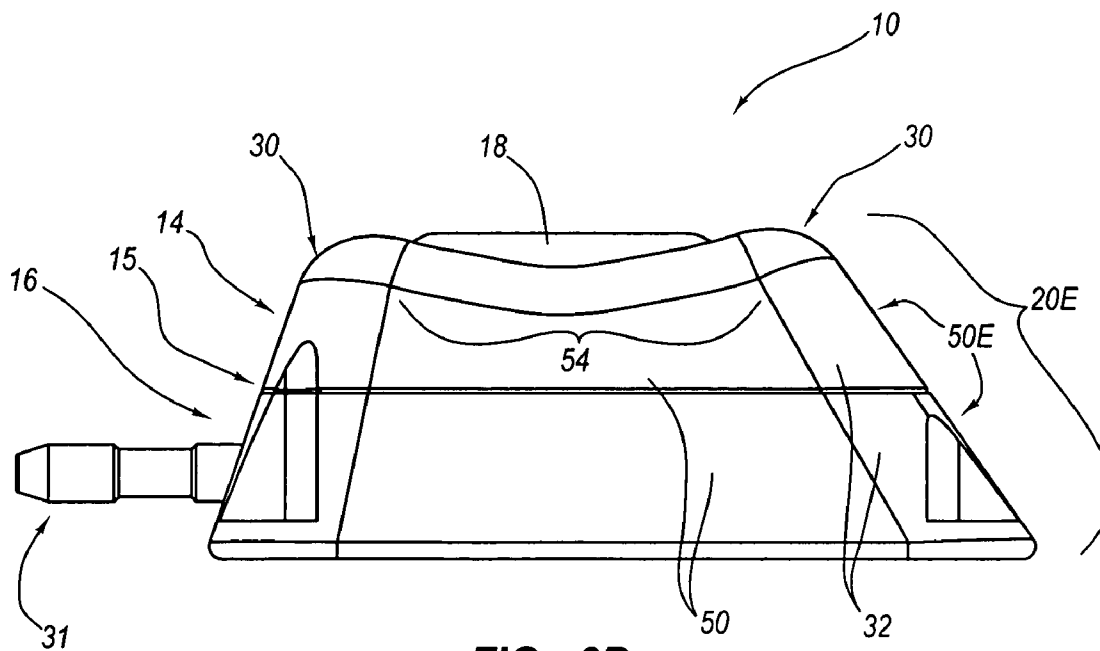


FIG. 6B

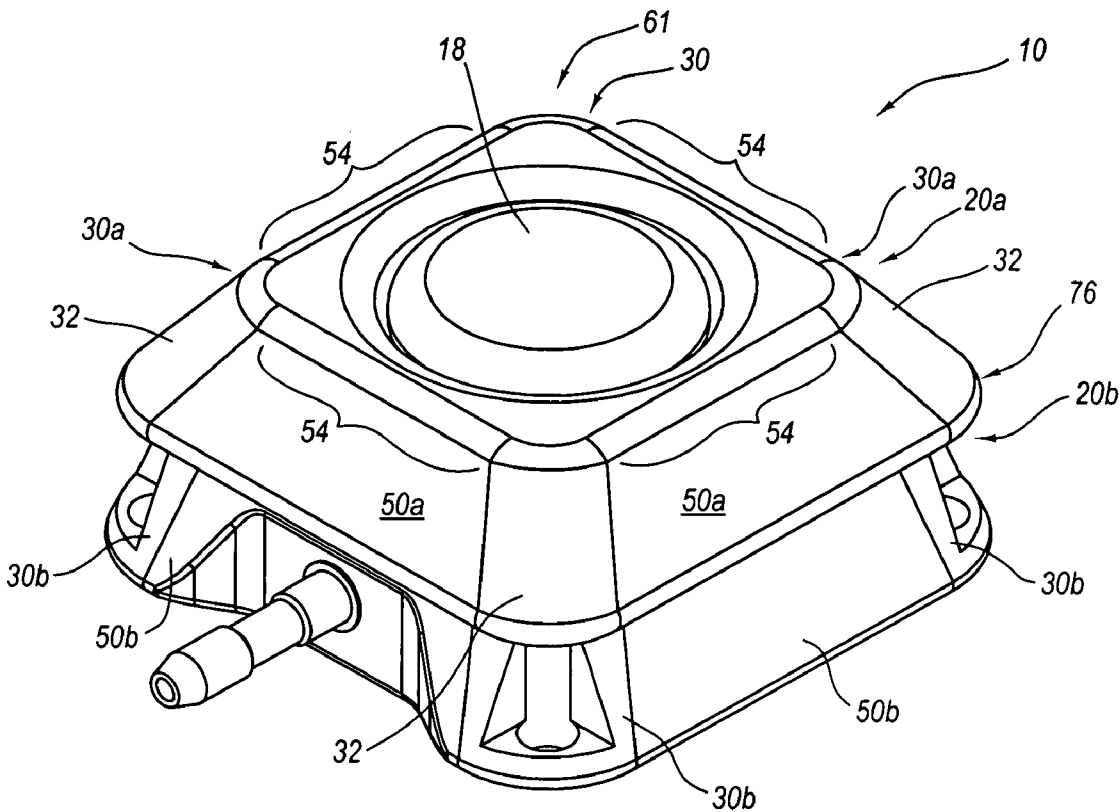


FIG. 7

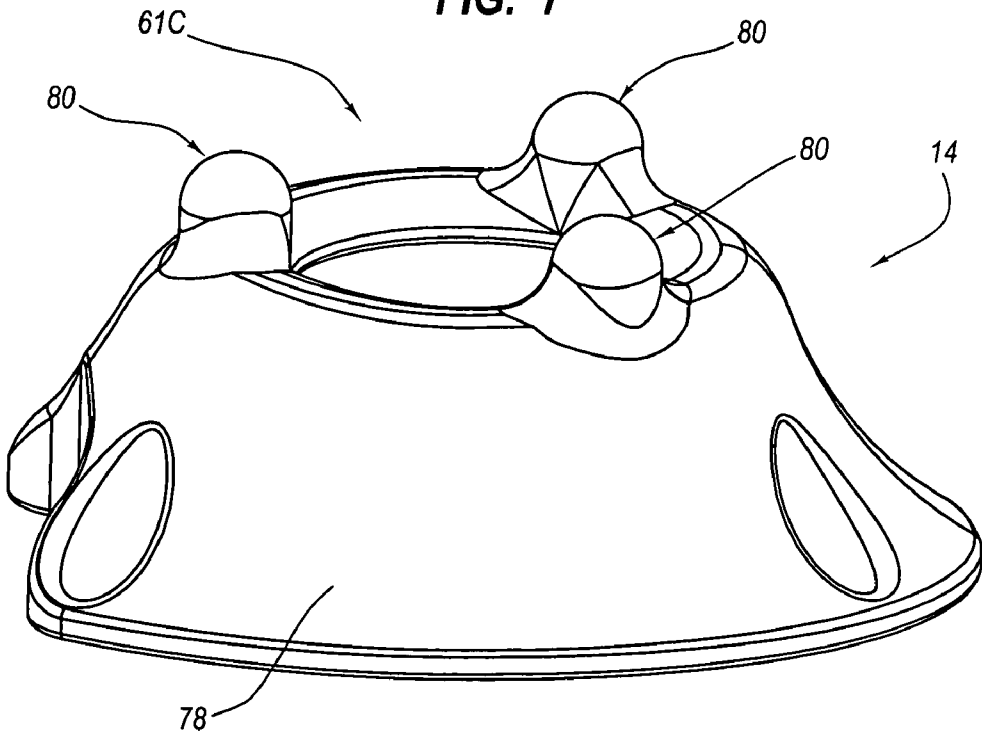


FIG. 8

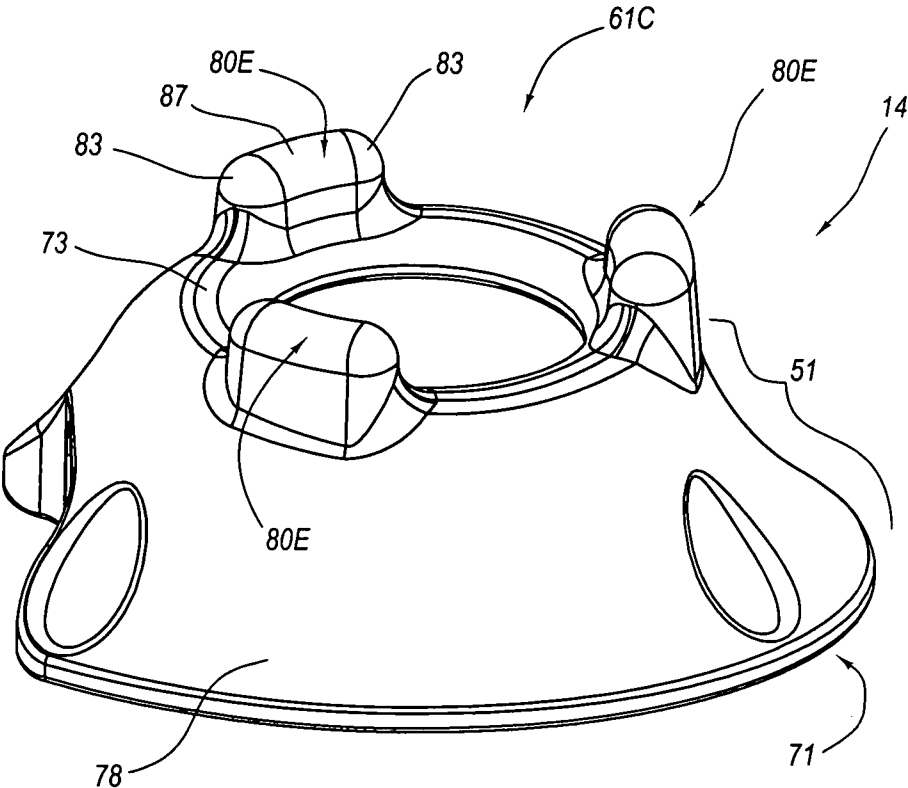


FIG. 9

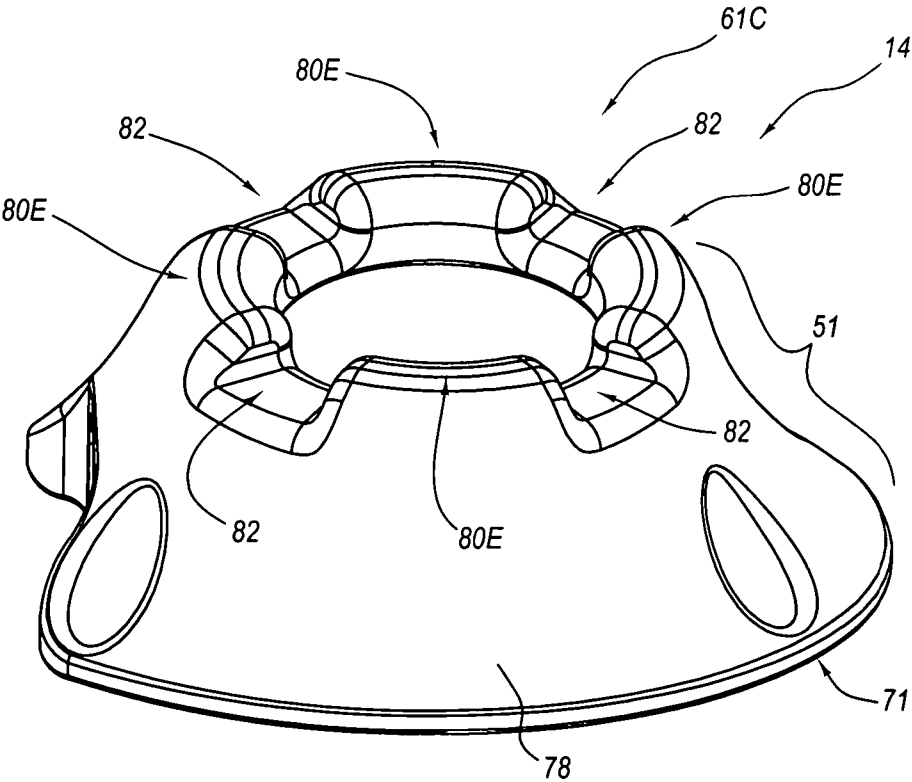


FIG. 10

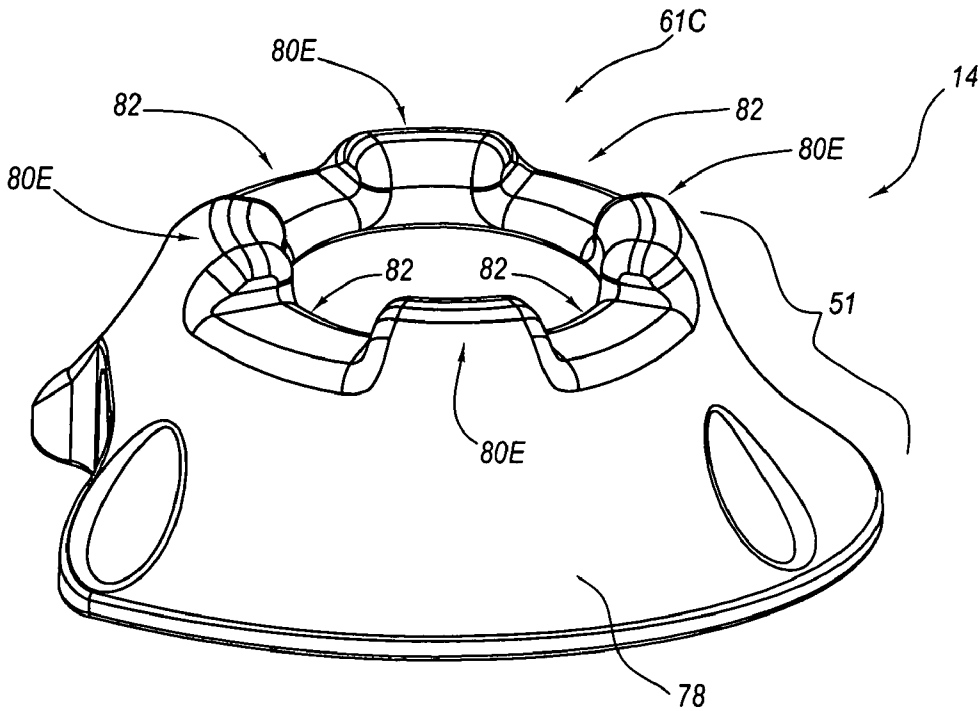


FIG. 11

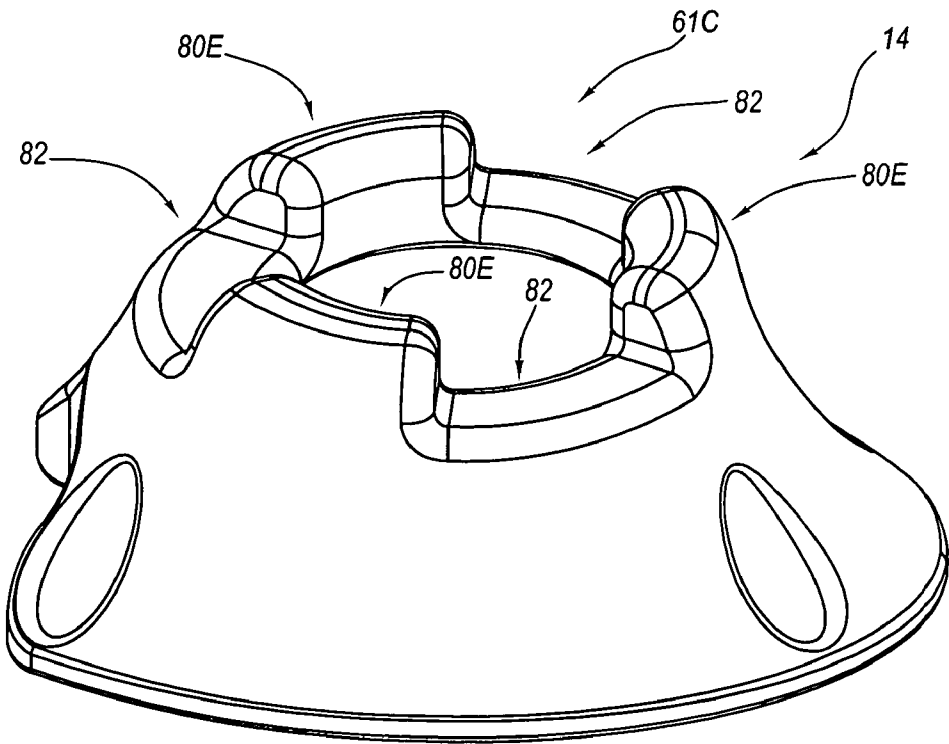


FIG. 12

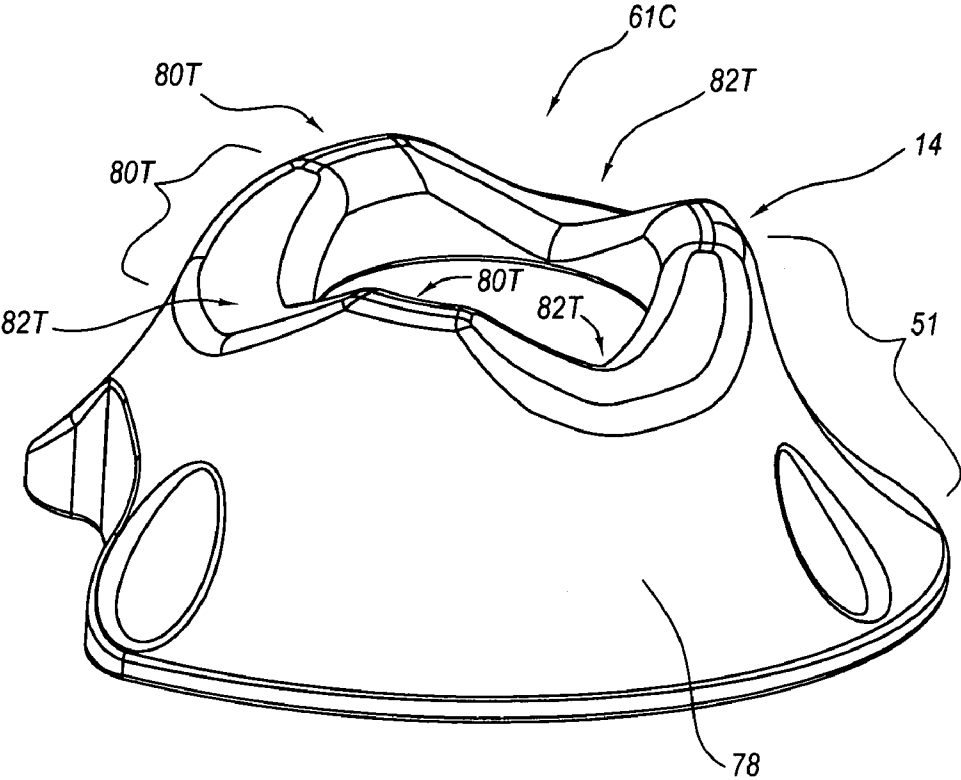


FIG. 13

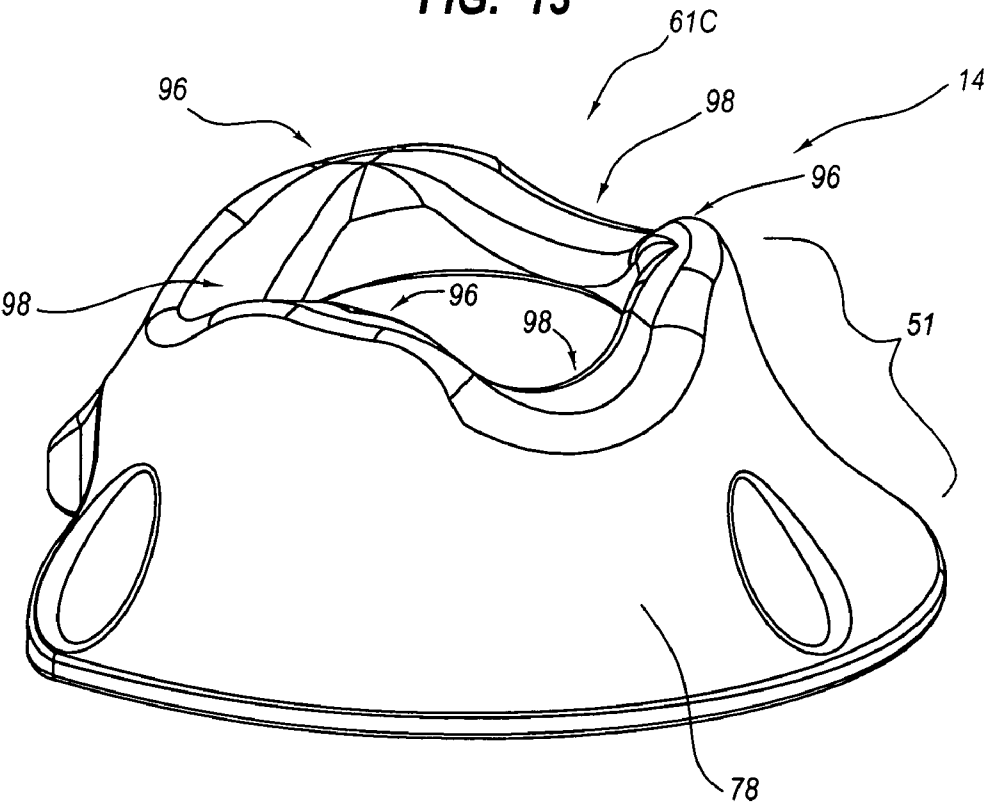


FIG. 14

U.S. Patent

Aug. 31, 2010

Sheet 9 of 30

US 7,785,302 B2

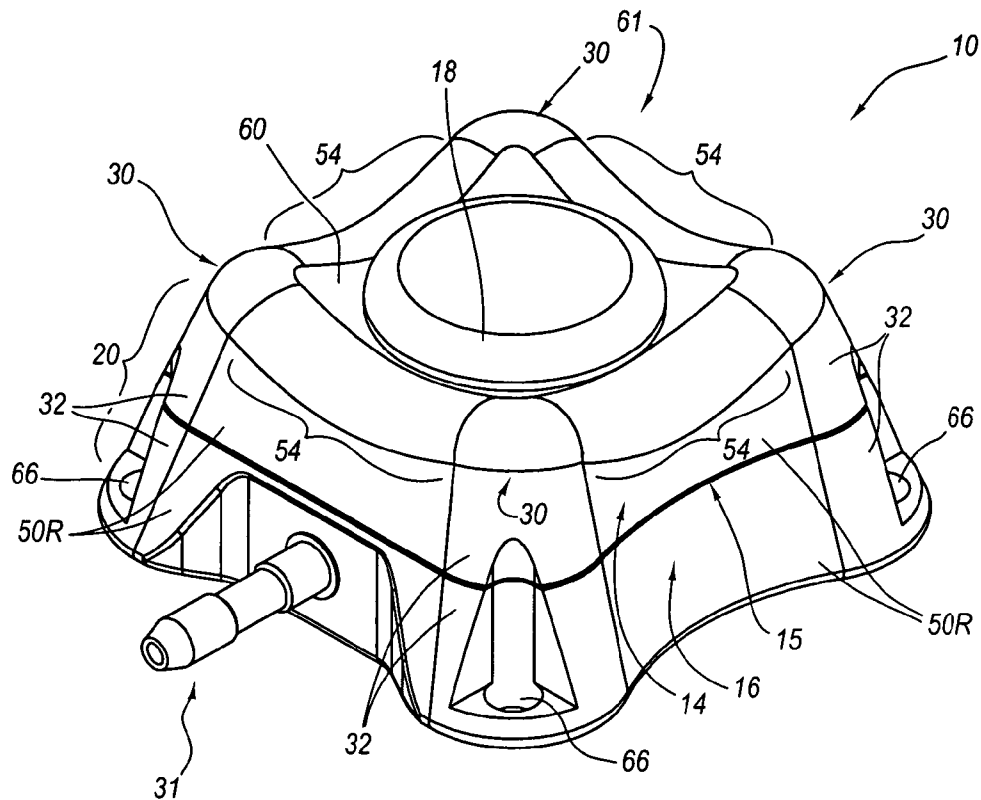


FIG. 15A

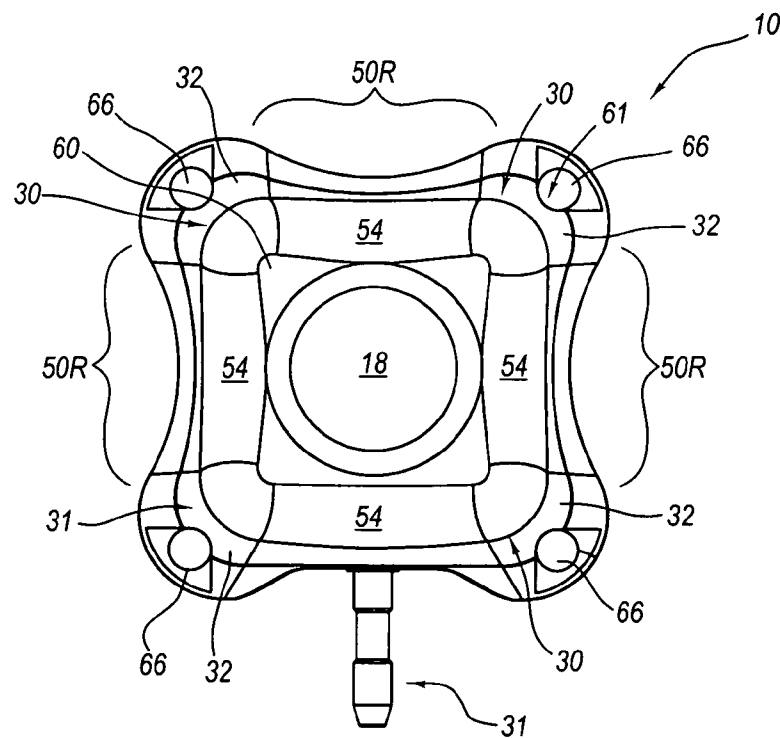


FIG. 15B

U.S. Patent

Aug. 31, 2010

Sheet 10 of 30

US 7,785,302 B2

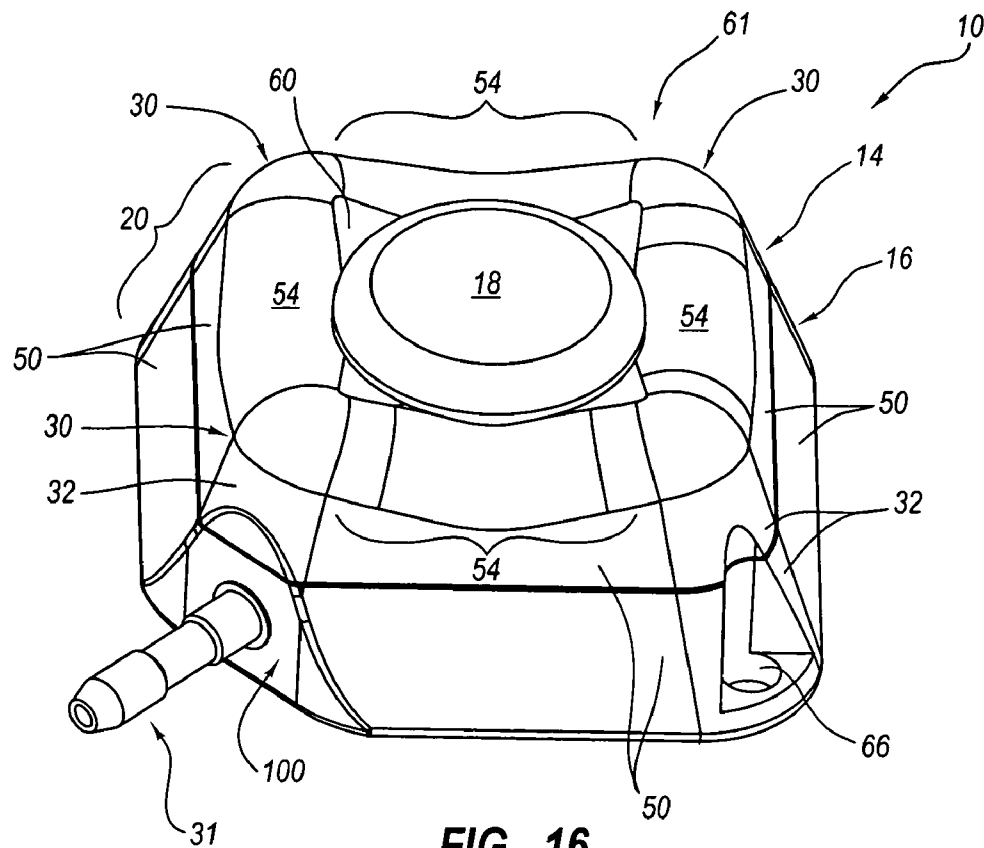


FIG. 16

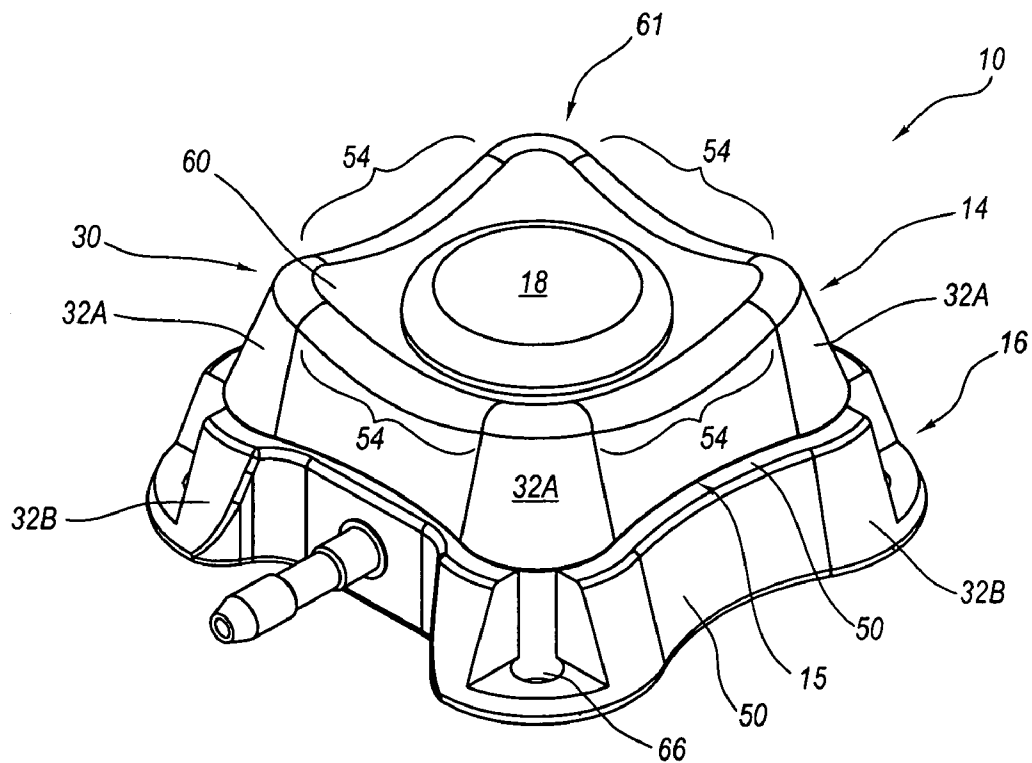




FIG. 17

U.S. Patent

Aug. 31, 2010

Sheet 12 of 30

US 7,785,302 B2

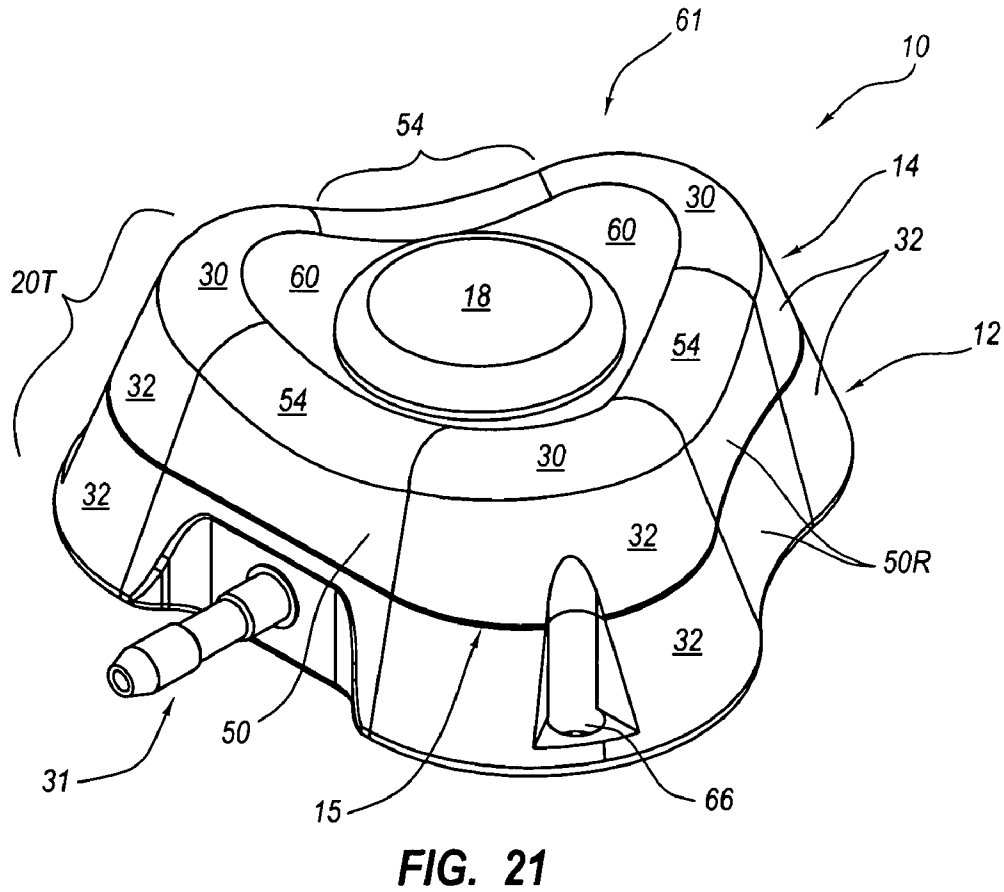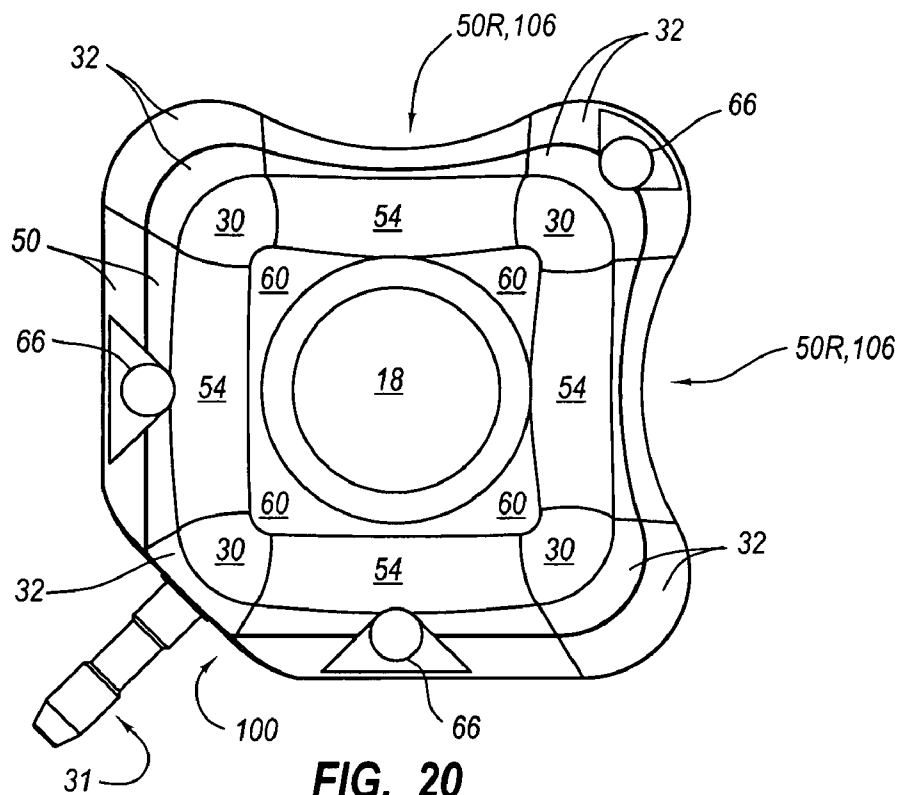

U.S. Patent

Aug. 31, 2010

Sheet 13 of 30

US 7,785,302 B2

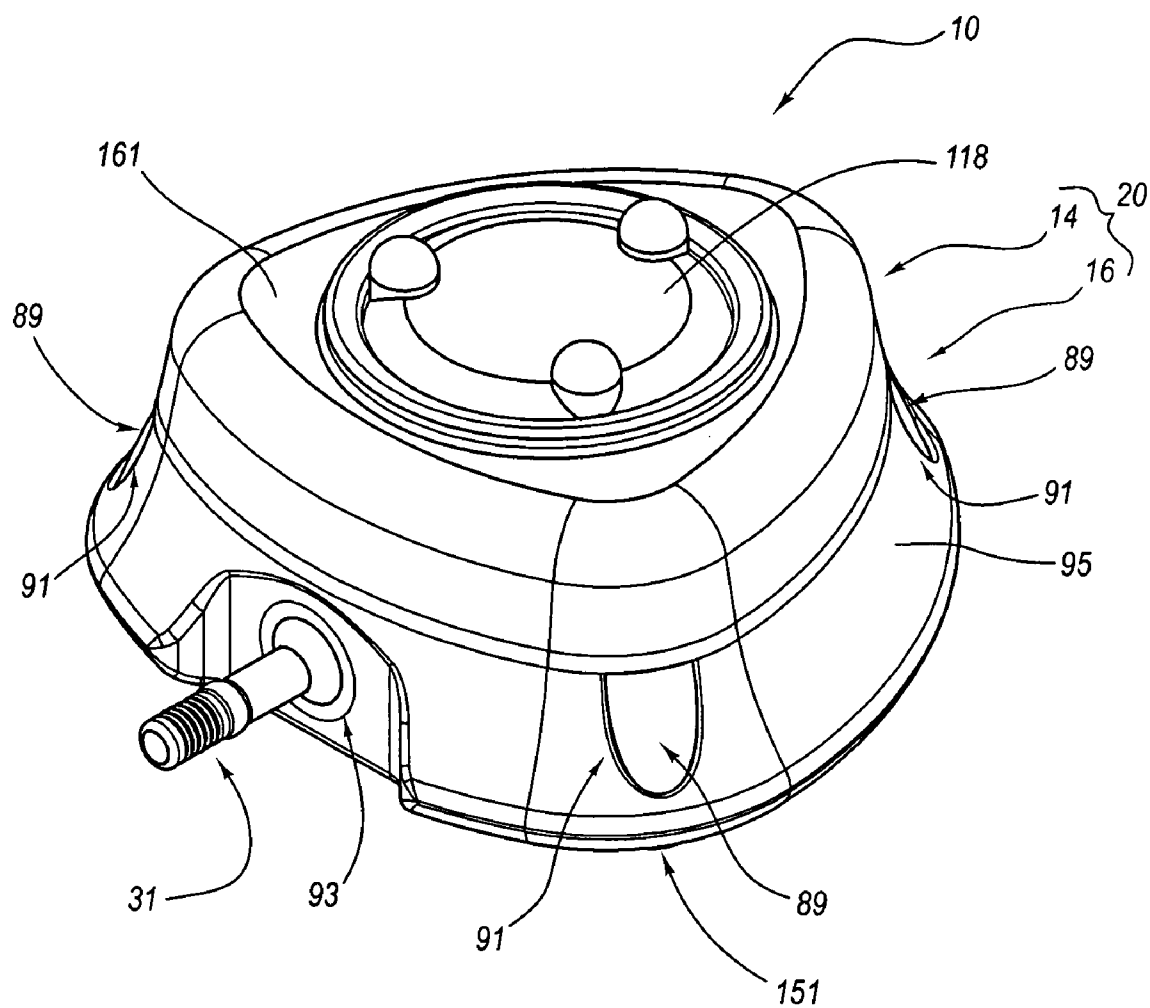


FIG. 22

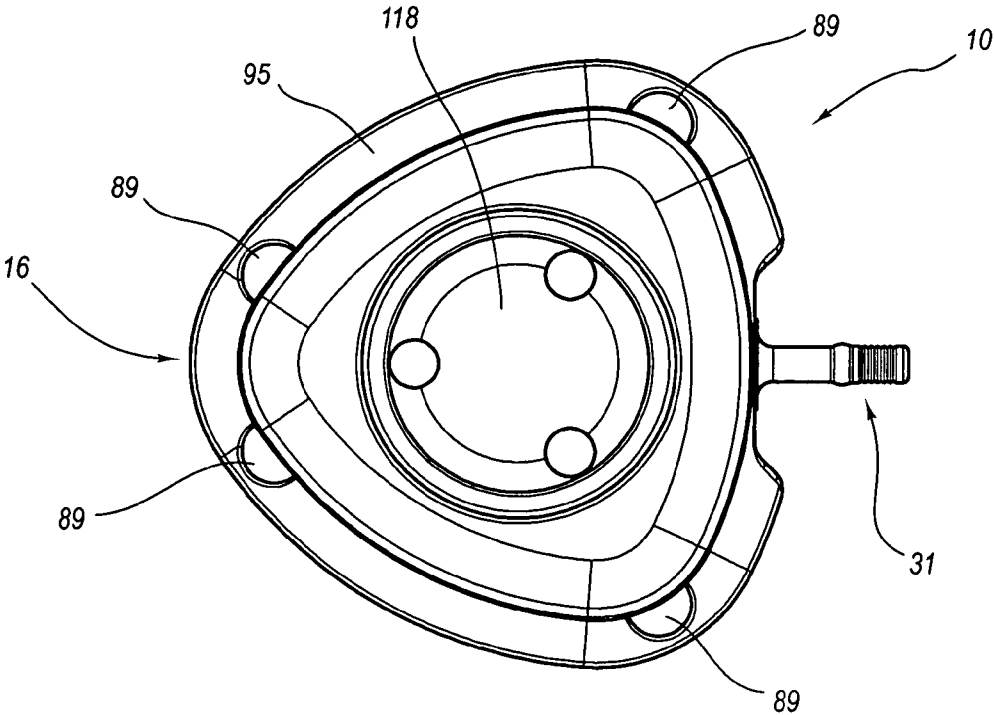


FIG. 23

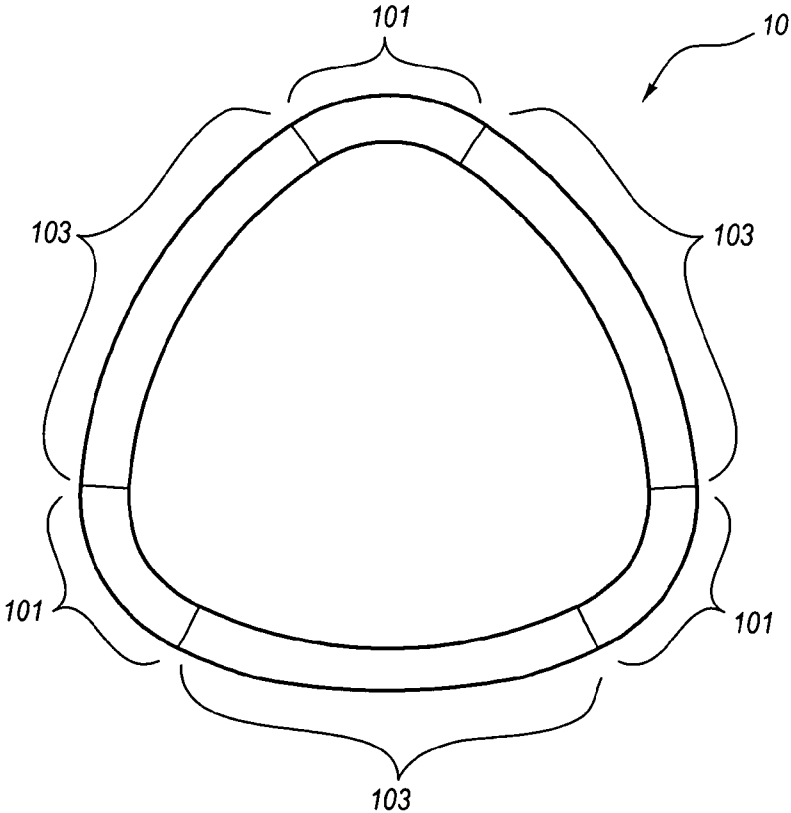


FIG. 24

U.S. Patent

Aug. 31, 2010

Sheet 15 of 30

US 7,785,302 B2

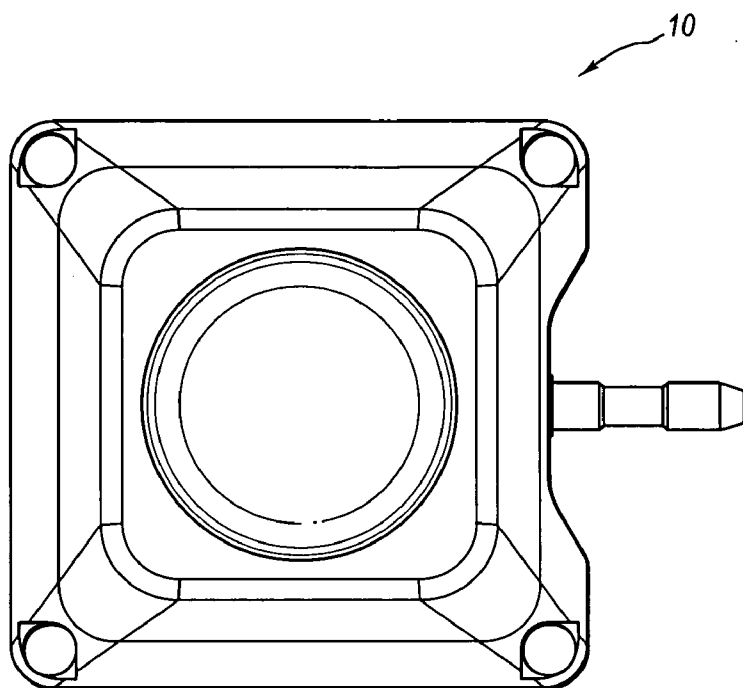


FIG. 25

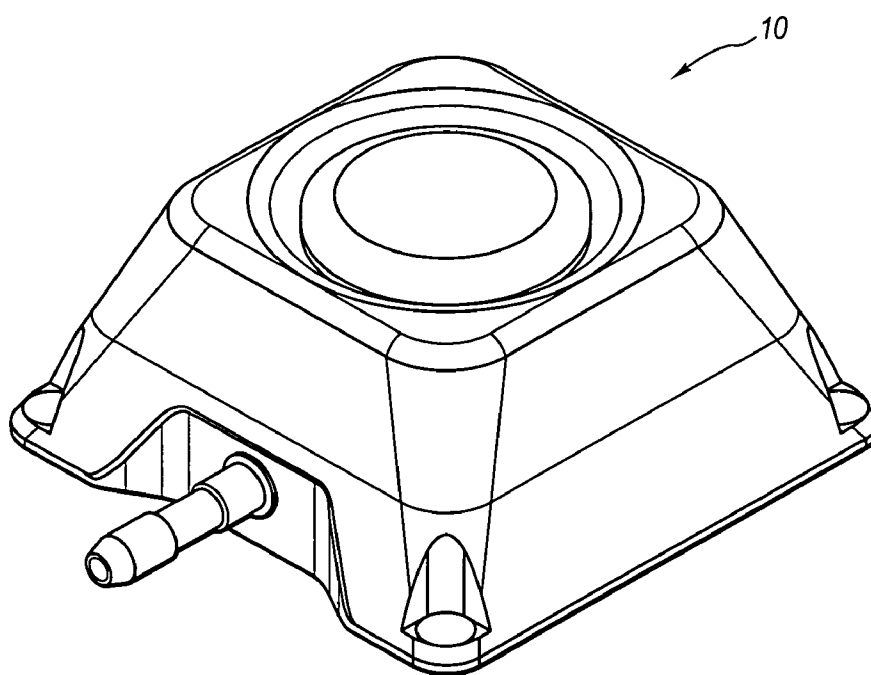


FIG. 26

U.S. Patent

Aug. 31, 2010

Sheet 16 of 30

US 7,785,302 B2

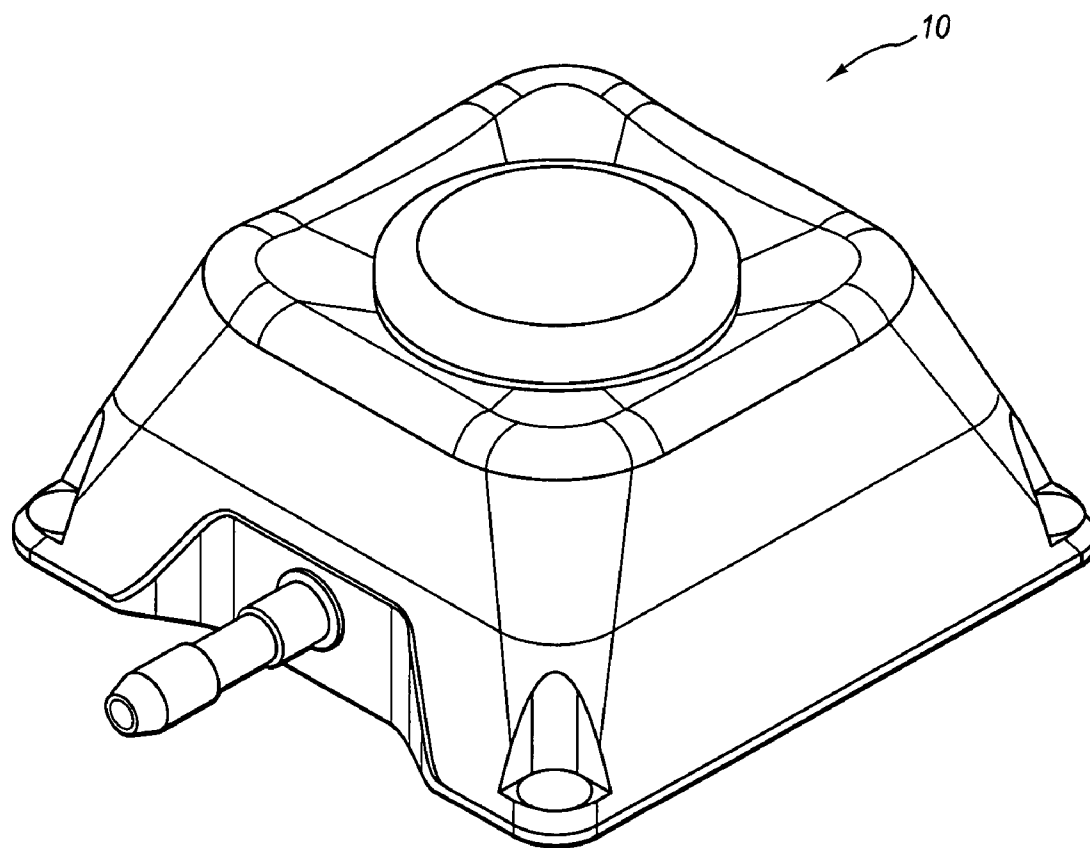


FIG. 27

U.S. Patent

Aug. 31, 2010

Sheet 17 of 30

US 7,785,302 B2

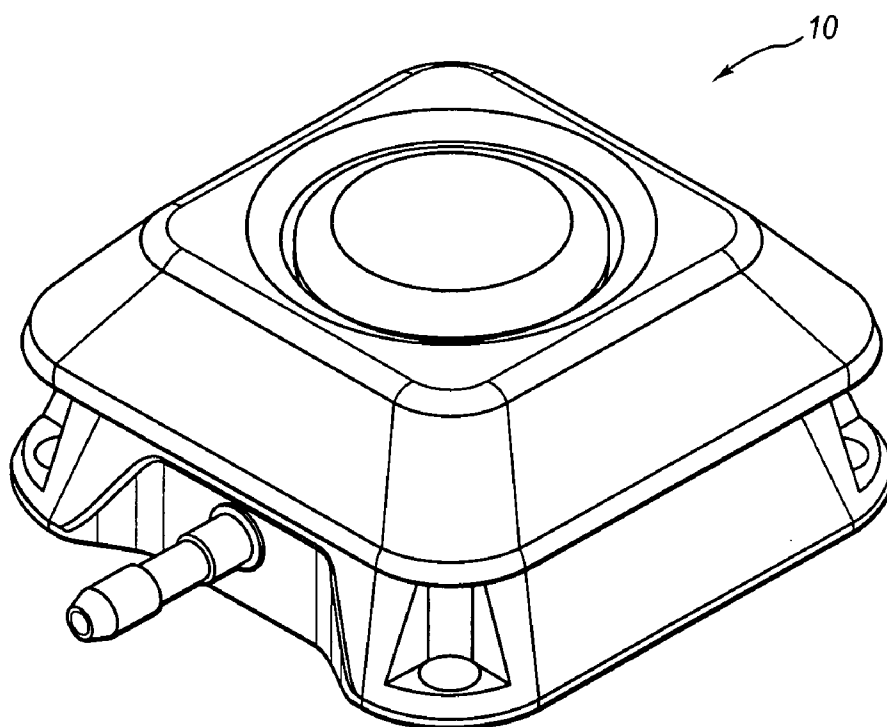


FIG. 28

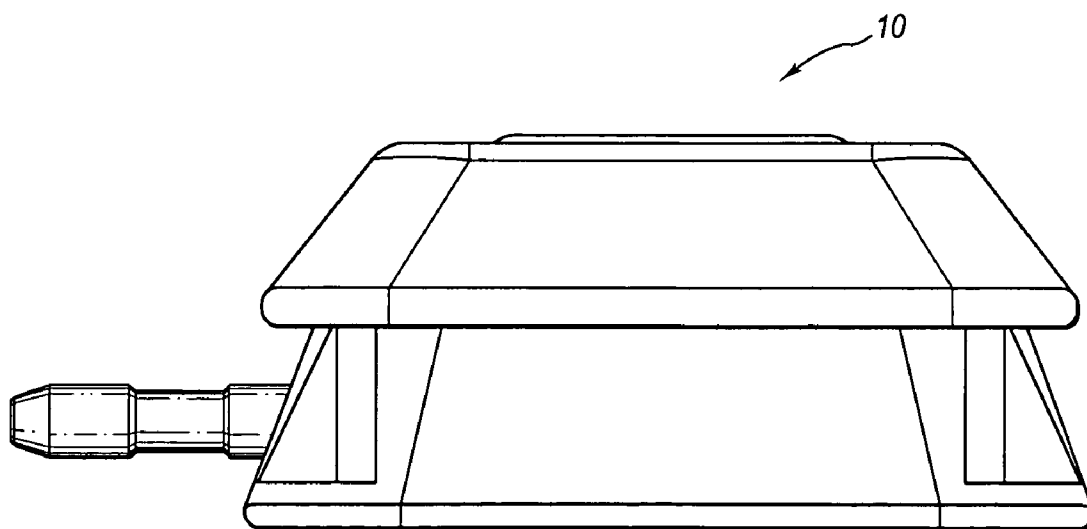


FIG. 29

U.S. Patent

Aug. 31, 2010

Sheet 18 of 30

US 7,785,302 B2

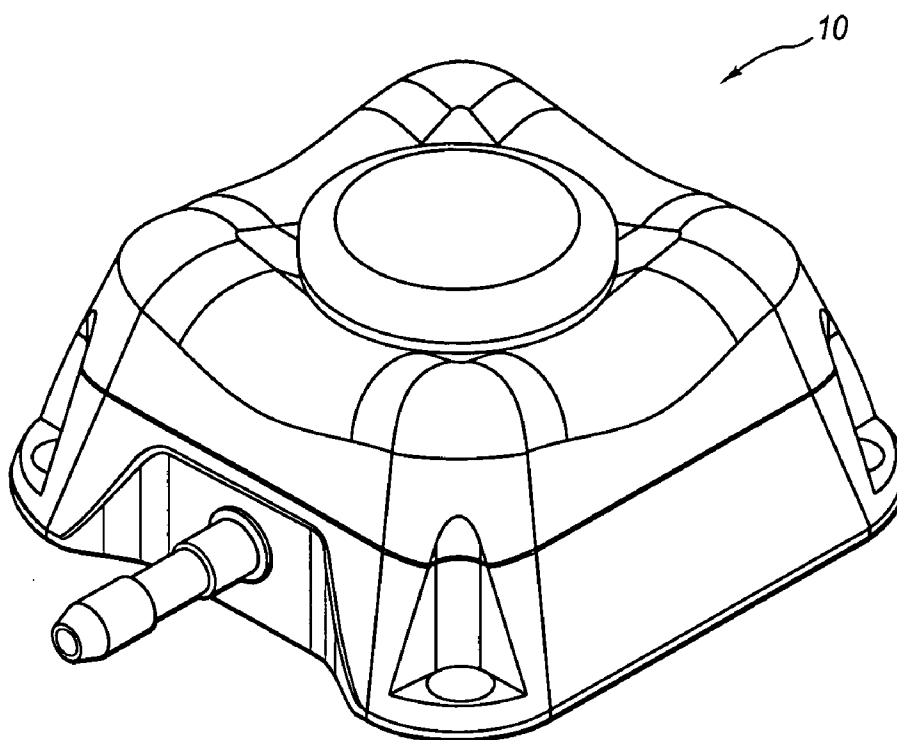


FIG. 30

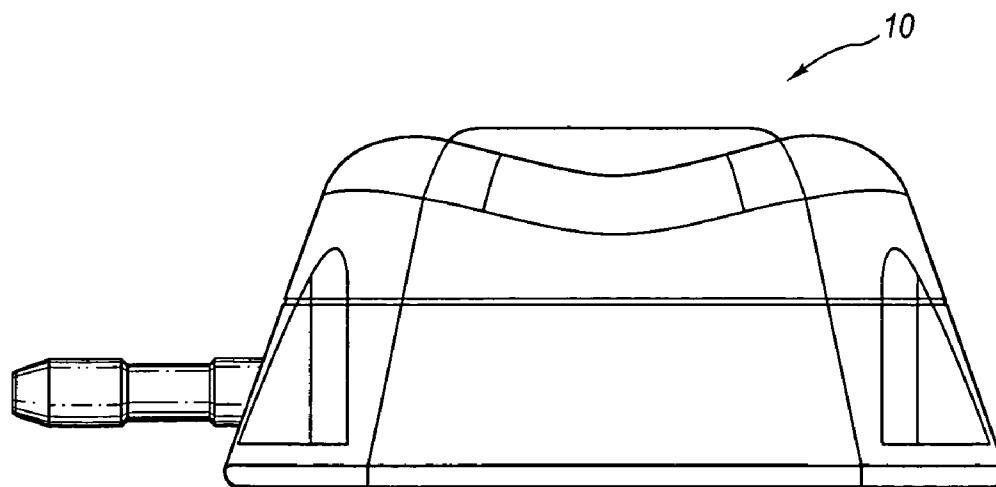


FIG. 31

U.S. Patent

Aug. 31, 2010

Sheet 19 of 30

US 7,785,302 B2

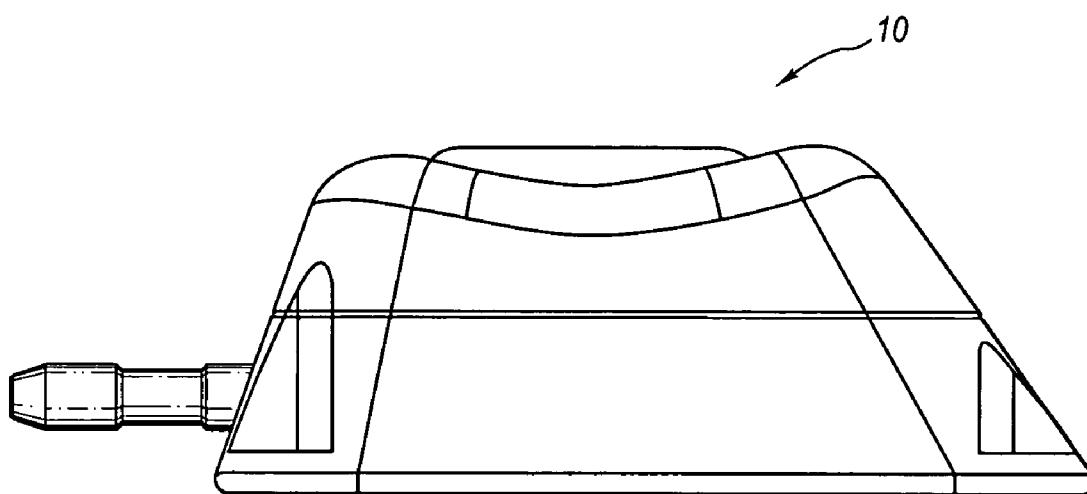


FIG. 32

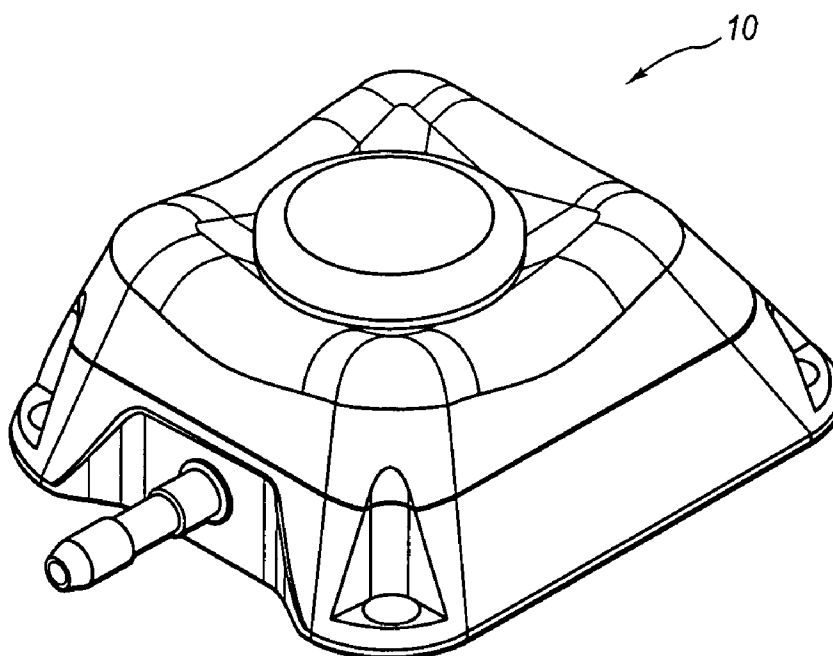


FIG. 33

U.S. Patent

Aug. 31, 2010

Sheet 20 of 30

US 7,785,302 B2

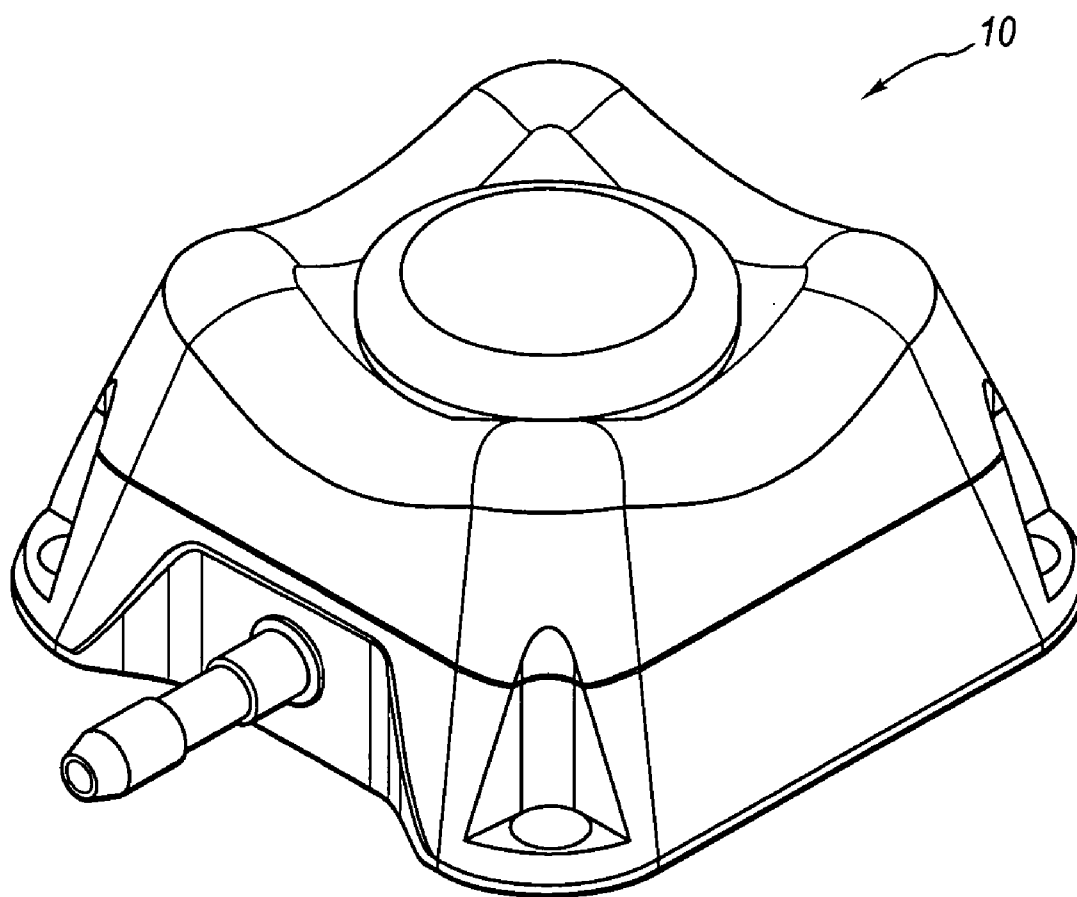


FIG. 34

U.S. Patent

Aug. 31, 2010

Sheet 21 of 30

US 7,785,302 B2

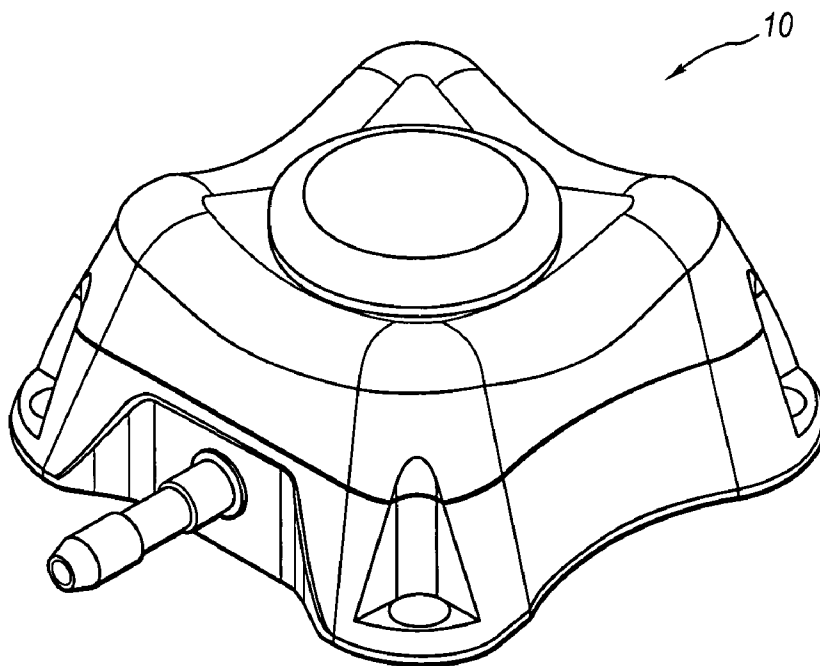


FIG. 35

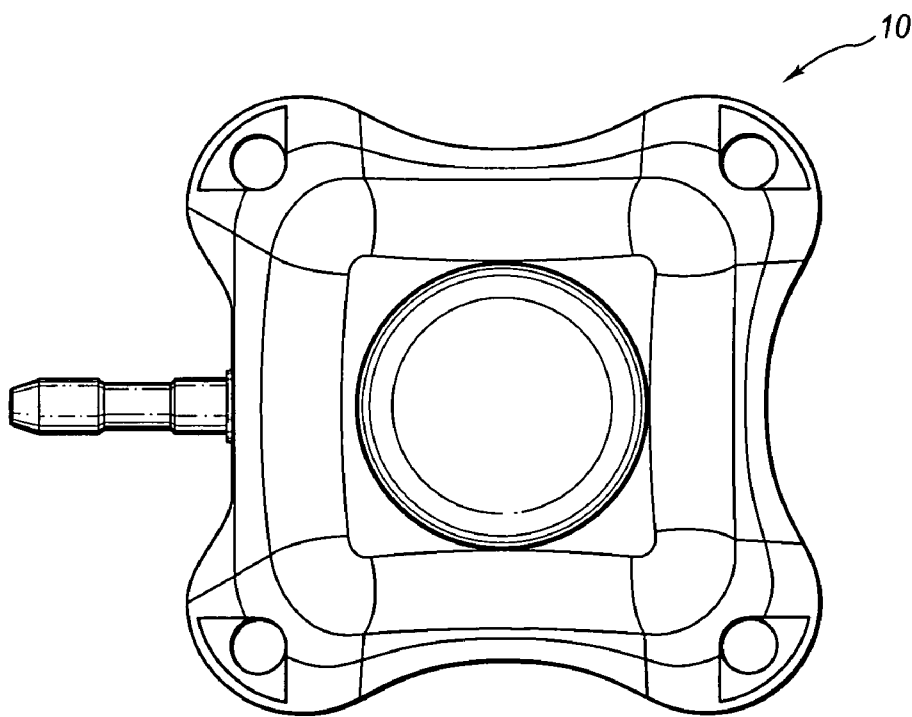


FIG. 36

U.S. Patent

Aug. 31, 2010

Sheet 22 of 30

US 7,785,302 B2

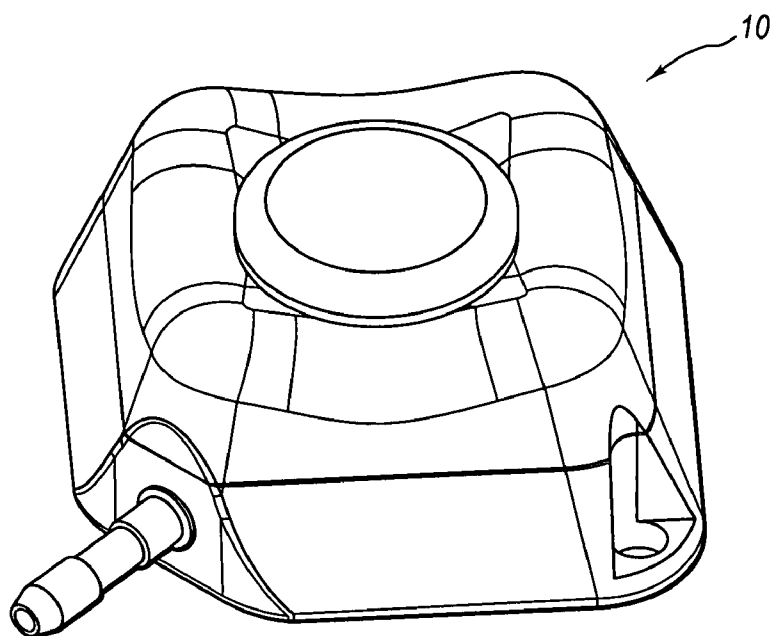


FIG. 37

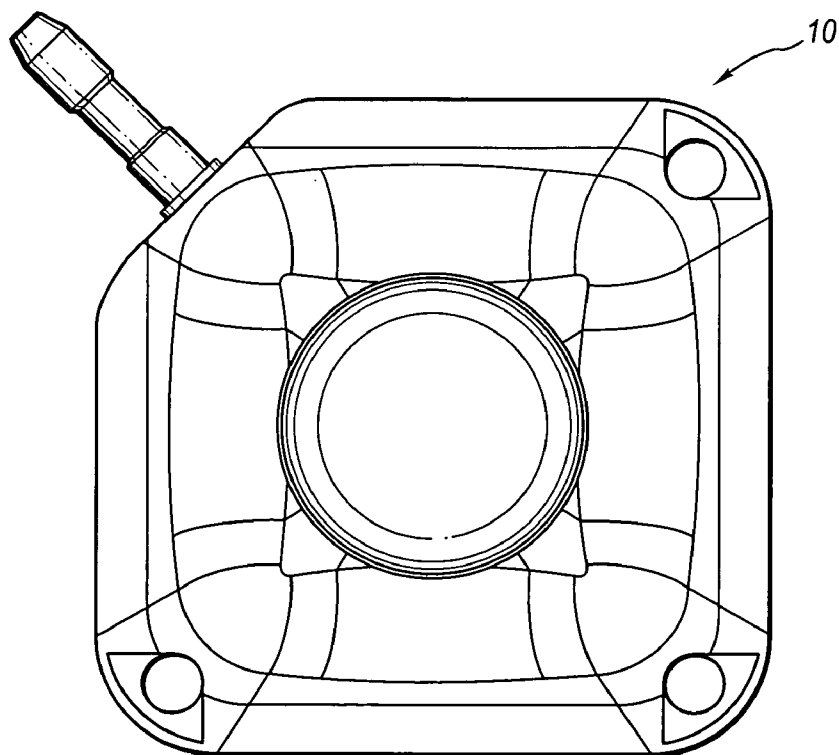


FIG. 38

U.S. Patent

Aug. 31, 2010

Sheet 23 of 30

US 7,785,302 B2

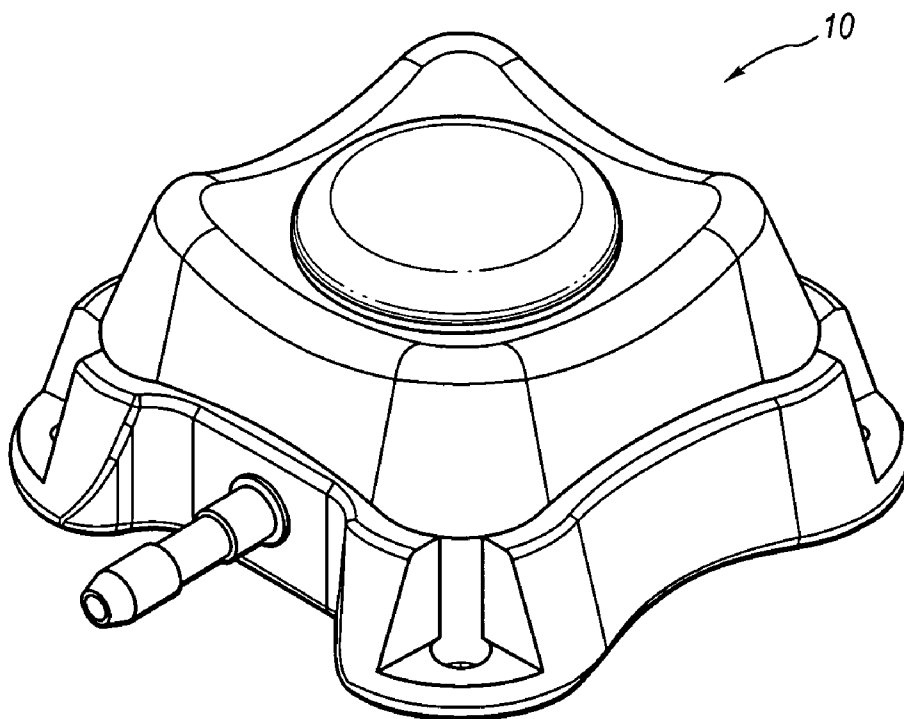


FIG. 39

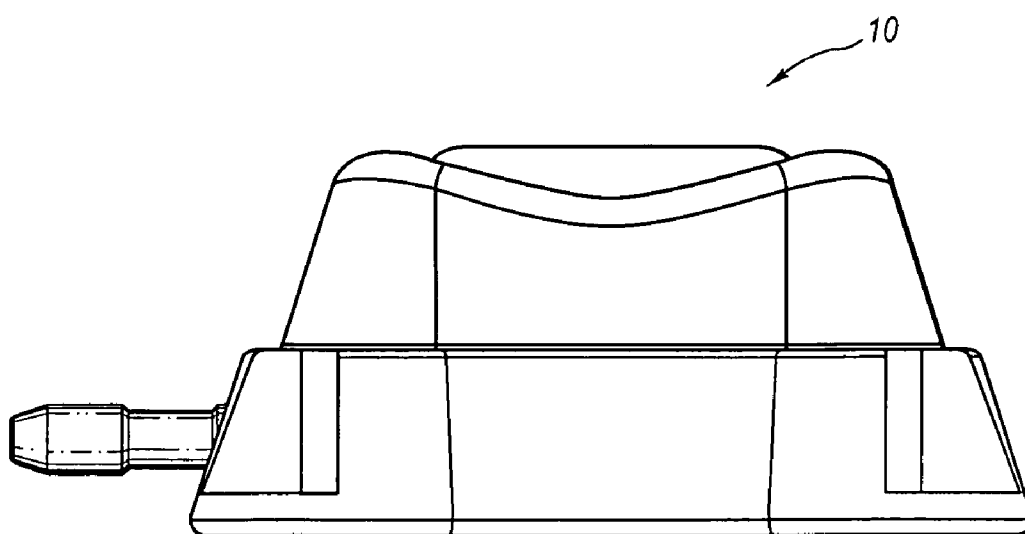


FIG. 40

U.S. Patent

Aug. 31, 2010

Sheet 24 of 30

US 7,785,302 B2

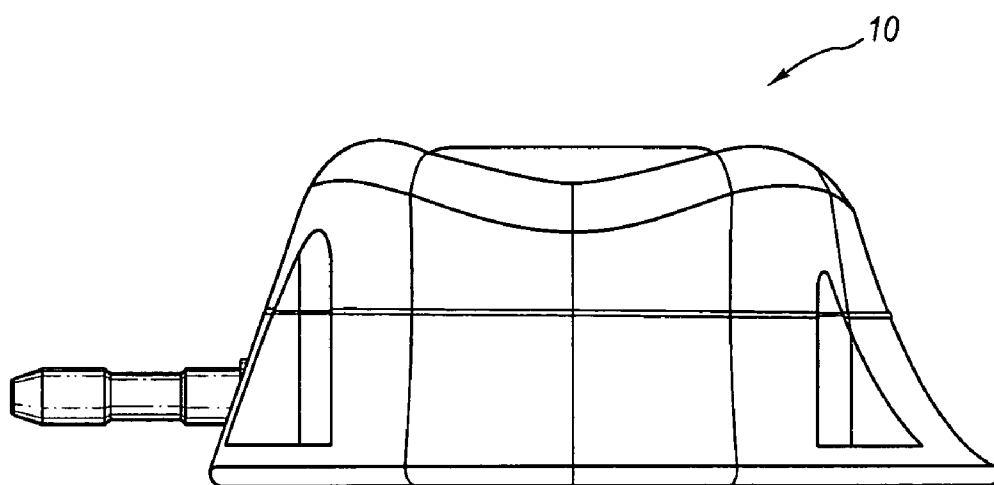


FIG. 41

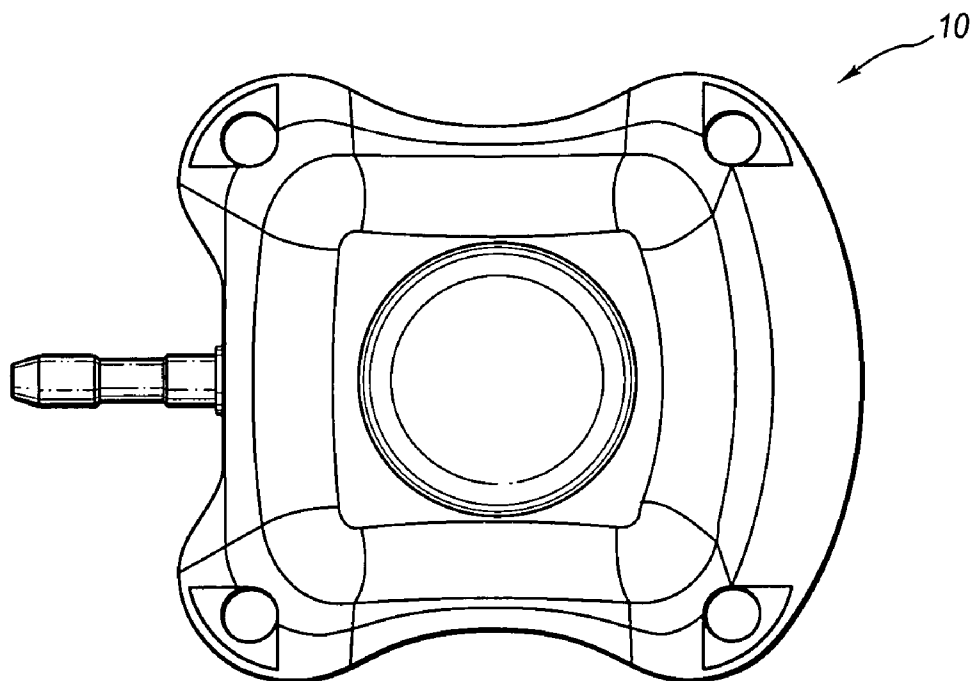


FIG. 42

U.S. Patent

Aug. 31, 2010

Sheet 25 of 30

US 7,785,302 B2

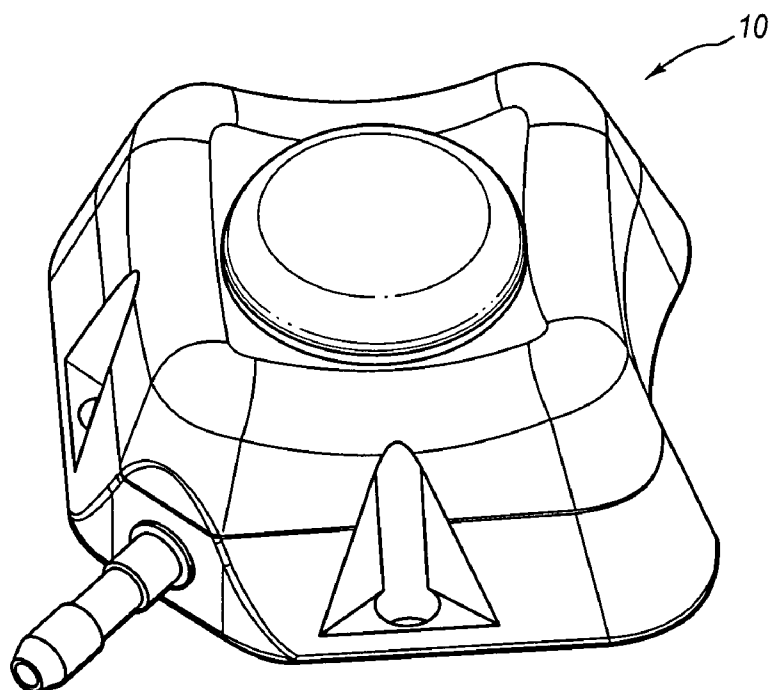


FIG. 43

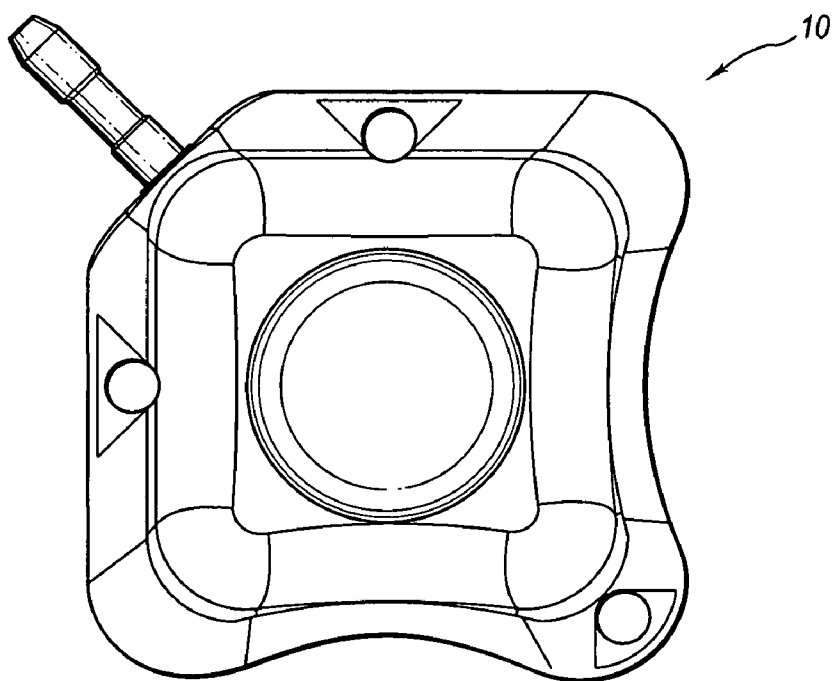


FIG. 44

U.S. Patent

Aug. 31, 2010

Sheet 26 of 30

US 7,785,302 B2

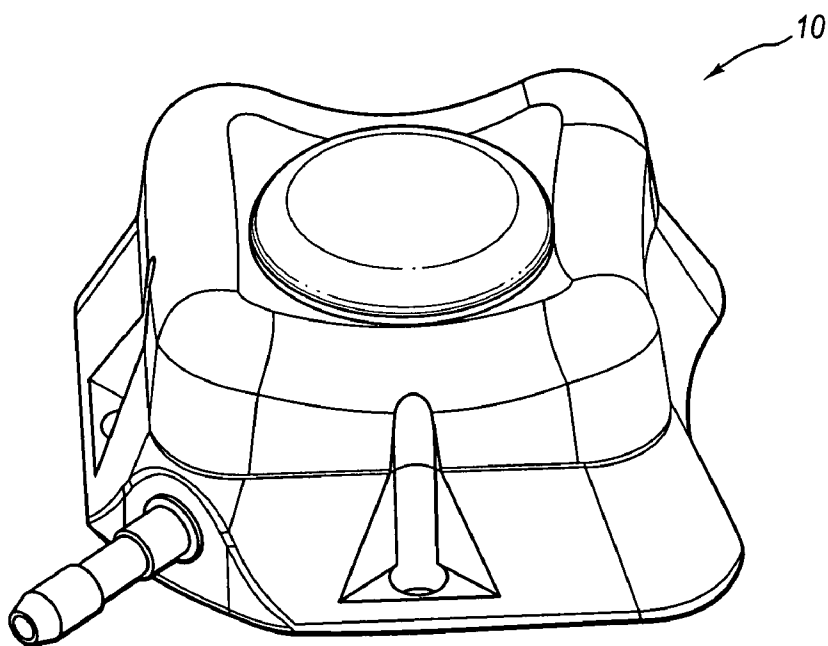


FIG. 45

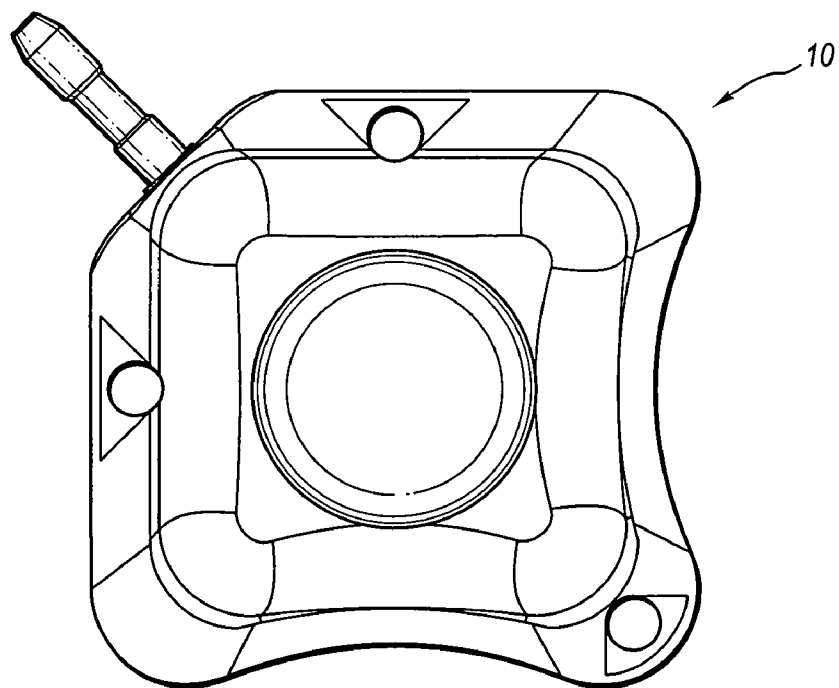


FIG. 46

U.S. Patent

Aug. 31, 2010

Sheet 27 of 30

US 7,785,302 B2

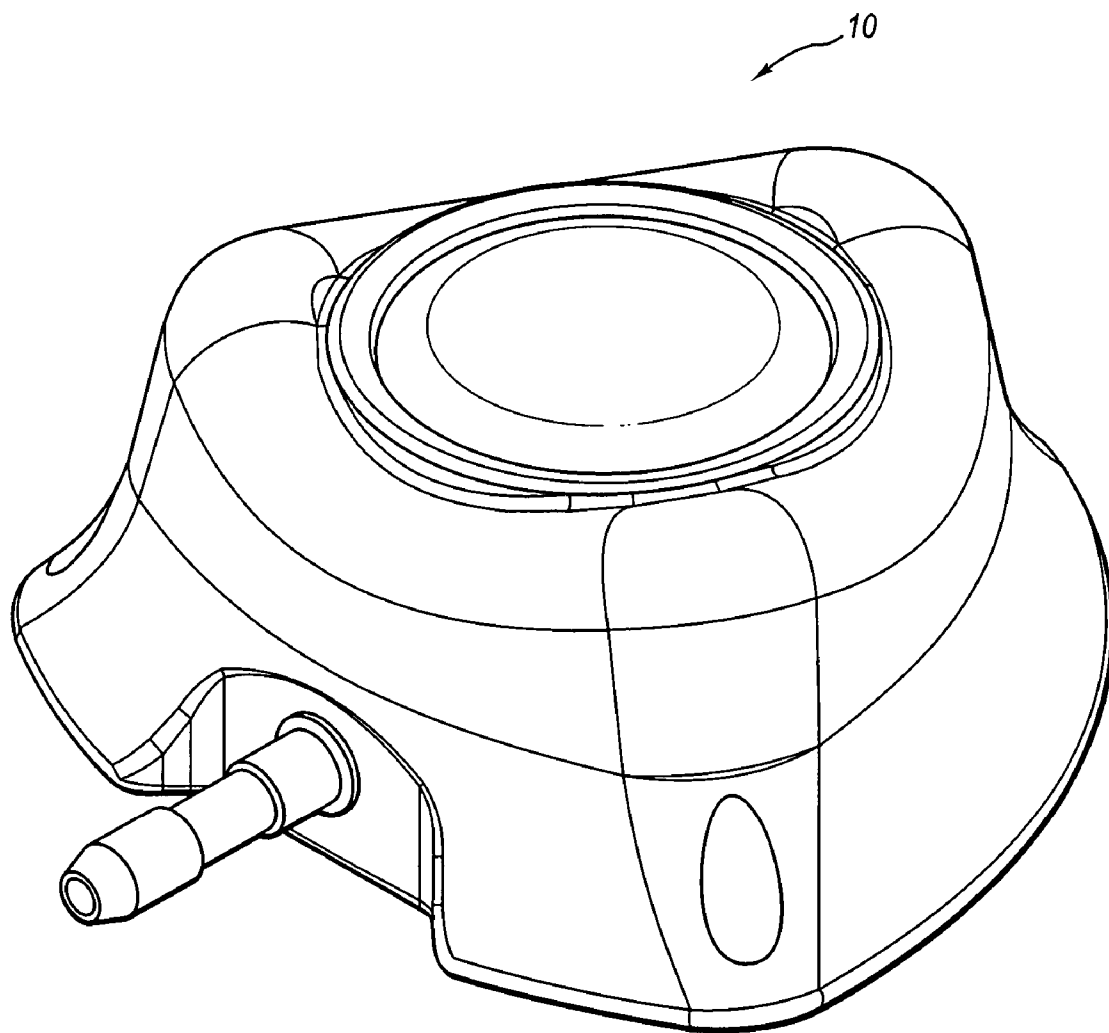


FIG. 47

U.S. Patent

Aug. 31, 2010

Sheet 28 of 30

US 7,785,302 B2

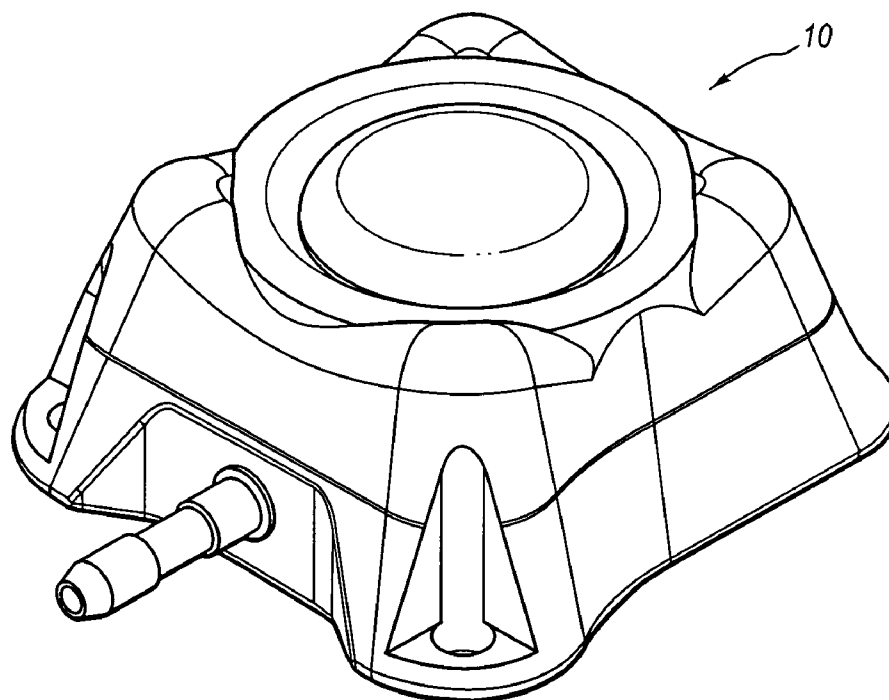


FIG. 48

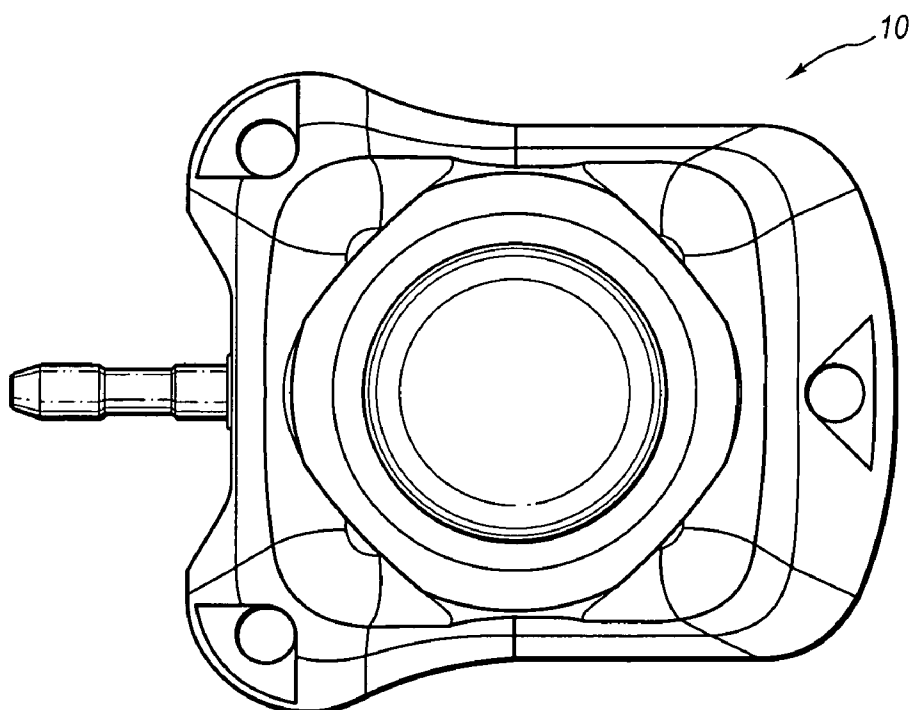


FIG. 49

U.S. Patent

Aug. 31, 2010

Sheet 29 of 30

US 7,785,302 B2

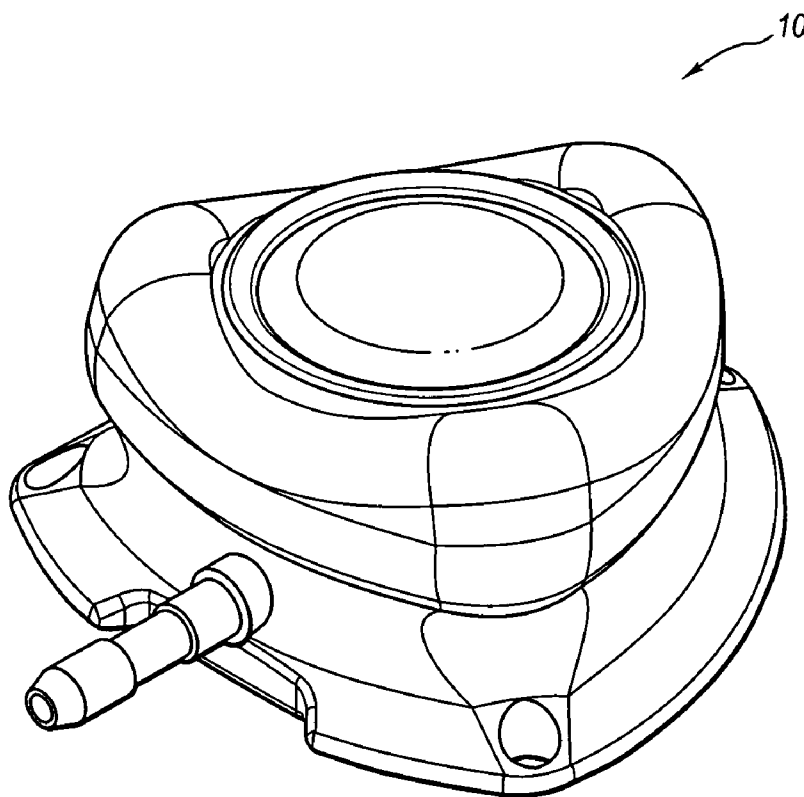


FIG. 50

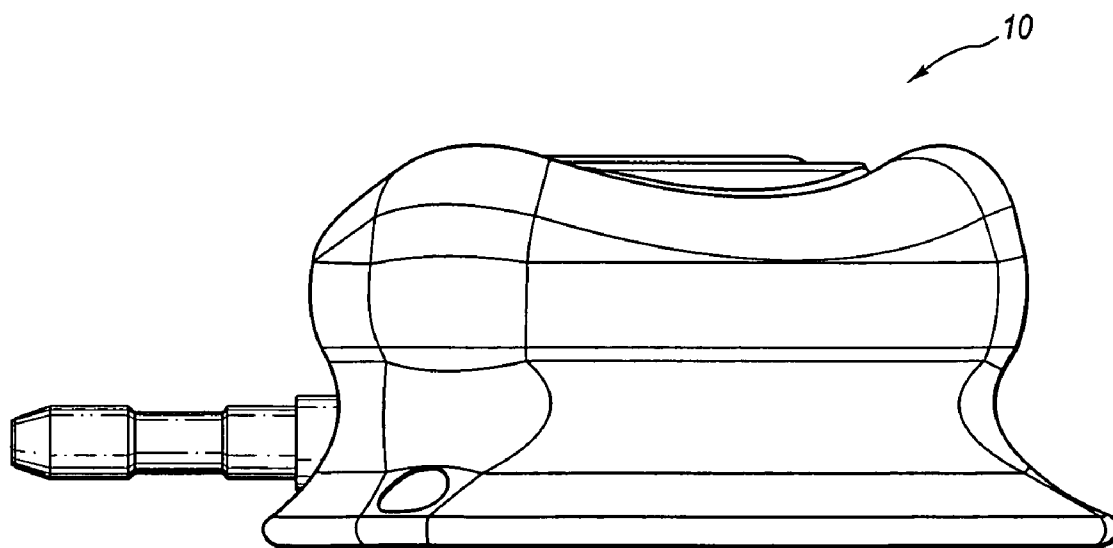


FIG. 51

U.S. Patent

Aug. 31, 2010

Sheet 30 of 30

US 7,785,302 B2

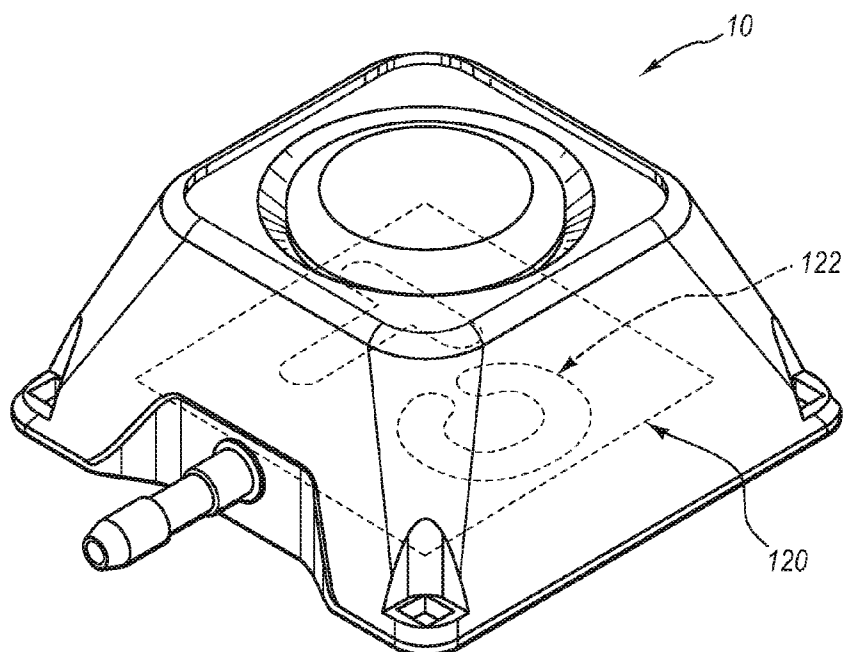


FIG. 52A

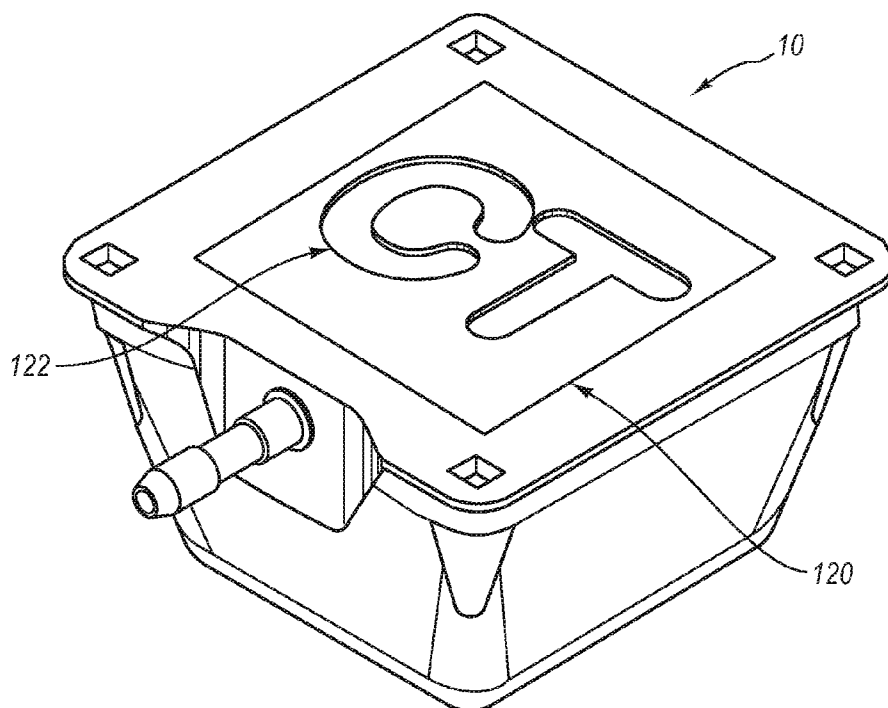


FIG. 52B

US 7,785,302 B2

1

ACCESS PORT IDENTIFICATION SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATION

This claims the benefit of U.S. patent application Ser. No. 60/658,518, filed 4 Mar. 2005, the disclosure of which is incorporated, in its entirety, by this reference.

BACKGROUND

Access ports provide a convenient method to repeatedly deliver a substance to remote areas of the body without utilizing surgical procedures. Ports are totally implantable within the body (i.e. subcutaneously) and may permit the infusion of medicine, parenteral solutions, blood products, or other fluids. Additionally, ports may also be used for blood sampling.

A typical port typically includes a housing assembly, a septum, and an outlet. The housing assembly and septum define a reservoir which is accessible through the septum. The outlet of the housing may communicate with a catheter which accesses a vein. Thus, the catheter may be employed for delivering a fluid from the port to a remote location in the body, for example, the superior vena cava.

In common practice, a port is implanted within the body and the catheter is routed to a remote area where a fluid is desired to be delivered. To deliver the fluid, a caregiver locates the septum of the port by palpation of a patient's skin. Port access is accomplished by percutaneously inserting a needle, typically a non-coring needle, through the septum of the port and into the reservoir. A fluid, such as a drug or other beneficial substance, may then be administered by bolus injection or continuous infusion into the reservoir. Thus, the fluid may flow through the reservoir into the catheter and finally to the site where the fluid is desired.

Ports generally come in two different types, surgical and cosmetic. Surgical ports may typically be used for delivering medicinal substances, including chemotherapy drugs which may be harmful to surrounding tissue, or for sampling blood. Cosmetic ports, on the other hand, are utilized to deliver saline or some other non-reactive substance to a prosthesis which supplements a body feature.

Generally, conventional access ports of different manufacturers or models may typically exhibit substantially similar geometries that may not be differentiable with respect to one another. Accordingly, once an access port is implanted, it may be difficult to determine the model, style, or design of the access port. Such uncertainty may be undesirable, at least for replacement timing purposes, among other reasons, especially if identification of the implanted access port is difficult to otherwise determine.

Thus, it would be advantageous to provide an access port which provides at least one identifiable characteristic that may be sensed or otherwise determined subsequent to subcutaneous implantation of the access port.

SUMMARY

One aspect contemplated by the instant disclosure relates to an access port for providing subcutaneous access to a patient. Such an access port may comprise a body for capturing a septum for repeatedly inserting a needle therethrough into a cavity defined within the body. Further, an access port according to the instant disclosure may include at least one

2

feature structured and configured for identification of the access port subsequent to subcutaneous implantation.

Another aspect contemplated by the instant disclosure relates to a method of identifying a subcutaneously implanted access port. More particularly, a subcutaneously implanted access port may be provided and at least one feature of the subcutaneously implanted access port may be perceived. Further, the subcutaneously implanted access port may be identified in response to perceiving the at least one feature.

A further aspect of the instant disclosure relates to an access port for providing subcutaneous access to a patient. Particularly, such an access port may comprise a body configured for capturing a septum for repeatedly inserting a needle therethrough into a cavity defined within the body. Further, the access port may comprise at least one feature structured to identify the access port as being power injectable subsequent to subcutaneous implantation.

Features from any of the above mentioned embodiments may be used in combination with one another in accordance with the instant disclosure. In addition, other features and advantages contemplated by the instant disclosure will become apparent to those of ordinary skill in the art through consideration of the ensuing description, the accompanying drawings, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A shows a perspective view of an embodiment of an access port according to the instant disclosure;

FIG. 1B shows a schematic side cross-sectional view the access port shown in FIG. 1A;

FIG. 2 shows a perspective view of an embodiment of an access port according to the instant disclosure;

FIG. 3 shows a perspective view of an access port according to the instant disclosure;

FIG. 4 shows a perspective view of an access port according to the instant disclosure;

FIG. 5 shows a perspective view of an access port according to the instant disclosure;

FIG. 6A shows a perspective view of an access port according to the instant disclosure;

FIG. 6B shows a side view of the access port shown in FIG. 6A;

FIG. 7 shows a perspective view of an access port according to the instant disclosure;

FIG. 8 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 9 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 10 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 11 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 12 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 13 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 14 shows a simplified perspective view of a cap for forming an access port according to the instant disclosure;

FIG. 15A shows a perspective view of an embodiment of an access port according to the instant disclosure;

FIG. 15B shows a top elevation view of the access port shown in FIG. 15A;

FIG. 16 shows a perspective view of an access port according to the instant disclosure;

FIG. 17 shows a perspective view of an access port according to the instant disclosure;

US 7,785,302 B2

3

FIG. 18 shows a perspective view of an access port according to the instant disclosure;

FIG. 19 shows a perspective view of an access port according to the instant disclosure;

FIG. 20 shows a perspective view of an access port according to the instant disclosure;

FIG. 21 shows a perspective view of an access port according to the instant disclosure;

FIG. 22 shows a perspective view of another embodiment of an access port according to the instant disclosure;

FIG. 23 shows a top elevation view of the assembled access port shown in FIG. 22;

FIG. 24 shows a simplified representation of a transverse cross section of the access port shown in FIGS. 22 and 23;

FIGS. 25-51 show perspective views of additional embodiments of an access port.

FIG. 52A shows a top perspective view of an embodiment of an access port with an alphanumeric message in the bottom of the port.

FIG. 52B shows a bottom perspective view of the embodiment in FIG. 52A.

DETAILED DESCRIPTION

The instant disclosure relates generally to percutaneous access and, more specifically, to methods and devices associated with percutaneous access. Generally, the instant disclosure relates to an access port for subcutaneous implantation. In one embodiment, an access port may allow a physician or other medical personnel to obtain long term percutaneous access to the interior of a patient's body. Employing an access port for percutaneous access may reduce the opportunity for infection by inhibiting fluid connections (that extend into the interior of a patient's body) from the patient's skin and from the external environment. The access device allows access to the interior of the patient without requiring a needle to pierce the skin. Further, internal components, such as a catheter or a valve, may be replaced without a surgical procedure. Features or aspects of the instant disclosure may apply to any such access ports for subcutaneous access to a patient, without limitation. The access port may be injected by hand (e.g., via a syringe including a needle) for example, or may be injected and pressurized by mechanical assistance (e.g., a so-called power injectable port).

Power injectable ports may be employed in, among other processes, for example, computed tomography ("CT") scanning processes. More particularly, a so-called "power injector" system may be employed for injecting contrast media into a peripherally inserted intravenous (IV) line. For example, such power injectors or injection systems may be commercially available from Medrad, Inc., a subsidiary of Schering AG, Germany and may be marketed under the trademark STELLANT®. Because fluid infusion procedures are often defined in terms of a desired flow rate of contrast media, such power injection systems are, in general, controllable by selecting a desired flow rate.

More specifically, the instant disclosure relates to an access port having at least one perceivable or identifiable feature for identifying the access port, wherein the identifiable feature is perceivable after the access port is implanted within a patient. For example, at least one or perhaps multiple identifiable feature(s) of an access port contemplated by the instant disclosure may be correlative to information (e.g., a manufacturer's model or design) pertaining to the access port. Thus,

4

an identifiable feature from an access port of a particular model may be unique in relation to most if not all other identifiable features of another access port of a different model or design. Of course, the at least one identifiable feature of an access port contemplated by the instant disclosure may be further correlative with any information of interest, such as type of port, catheter type, date of manufacture, material lots, part numbers, etc. In one example, at least one identifiable feature of an access port may be correlative with the access port being power injectable. In this way, once at least one identifiable feature of an access port is observed or otherwise determined, correlation of such at least one feature of an access port may be accomplished, and information pertaining to the access port may be obtained.

In one embodiment, at least one feature may be perceived by palpation (i.e., to examine by touch), by way of other physical interaction, or by visual observation. Accordingly, a person of interest may touch or feel the access port through the skin to perceive at least one identifying characteristic thereof. In another embodiment, at least one identifiable feature may be perceived via x-ray or ultrasound imaging. In yet a further embodiment, at least one identifiable feature may be perceived through magnetic, light, or radio energy interaction or communication with the access port.

Turning to the embodiment wherein at least one feature may be perceived through palpation, other physical interaction, or visual observation, a topography or exterior surface feature of an access port contemplated by the instant disclosure may be configured for perception. For example, referring to FIGS. 1A and 1B, an exemplary access port 10 contemplated by the instant disclosure is shown. FIGS. 1A and 1B show a perspective view and a schematic side cross-sectional view, respectively, of an access port 10 for allowing percutaneous or otherwise internal access to a patient's body. Access port 10 includes a housing or body 20 defined by a cap 14 and a base 16. Cap 14 and base 16, as known in the art, may be configured for capturing therebetween a septum 18. As shown in FIG. 1A, cap 14 and base 16 may matingly engage one another along a mating line 15. Cap 14 and base 16 may be secured or affixed to one another via mechanical fasteners such as screws or other fastening devices, may be adhesively affixed to one another, or may be affixed to one another as known in the art. Further, cap 14, base 16, and septum 18 may collectively define a cavity 36 in fluid communication with a lumen 29 of outlet stem 31.

The body 20 may be implanted in a patient 7, as shown in FIG. 1B, to dispose the cavity 36 subcutaneously within the patient 7. Also, suture apertures 66 (FIG. 1A) may be used to affix the access port 10 within the patient 7, if desired. After the body 20 is implanted in a patient 7, the upper surface of the septum 18 may be substantially flush with the surface of the skin 6 of the patient 7 and may be repeatedly punctured for creating a percutaneous passageway from the exterior of the skin of the patient into the cavity 36. The outlet stem 31 may create a fluid-communicative passageway from the cavity 36 through the outlet stem 31 and into the interior of the patient 7. A catheter may be coupled to the outlet stem 31 for fluid communication with the cavity 36 and for transferring fluid from the cavity 36 to a desired remote location from the cavity 36 and within a patient 7.

Body 20 of access port 10 may comprise a bio-compatible material such as polysulfone, titanium, or any other suitably bio-compatible material as known in the art. Accordingly, the body 20 may be formed from a bio-compatible plastic material. If desired, the body 20 may comprise a penetrable material for penetration by sutures or needles. In another embodiment, and as discussed further hereinbelow, body 20 may

US 7,785,302 B2

5

comprise an impenetrable material such as, for instance, a metal if desired. Body 20 may include a concave bottom or, in another embodiment, may include a flat bottom, without limitation.

According to the instant disclosure, access port 10 may comprise a body 20 exhibiting at least one identifiable feature. More particularly, as shown in FIG. 1A, body 20 may exhibit a partial generally pyramidal shape (i.e., a polygonal base having surfaces for each side of the polygon extending toward a common vertex otherwise known as a frustum). Generally, a body 20 of an access port 10 may exhibit a partial pyramidal shape extending between a generally quadrilateral shaped base positioned at reference plane 11 and a generally quadrilateral shaped upper base positioned at reference plane 9. Reference planes 9 and 11 will not be shown in FIGS. 2-21, for clarity; however, reference to planes 9 or 11 with respect to FIGS. 2-21, as used herein, will refer to corresponding reference planes analogous to reference planes 9 and 11 as shown in FIGS. 1A and 1B.

As shown in FIG. 1A, the exterior of access port 10 is substantially defined by four substantially planar side surfaces 50 connected to one another by radiuses 32. In addition, the upper topography 61 of access port 10 is defined by upper surface 60 in combination with chamfers 46A and 46B and may be further defined by the upper surface of septum 18. Explaining further, the outer periphery of upper topography 61 may be described as a generally quadrilateral exterior formed by side regions 54 and having rounded corner regions 30 adjacent side regions 54. Such a configuration may provide an access port having at least one feature that may be perceived by palpation.

It may be appreciated that there are many variations to the geometry of access port 10 as shown in FIG. 1A. For instance, while the body 20 of access port 10 may be described as a partially pyramidal shape or frustum, the instant disclosure is not so limited. Rather, one or more of side surfaces 50 may be oriented at as may be desired, without reference to any other side surfaces 50. Accordingly, for example, one of surfaces 50 may be substantially vertical while the remaining surfaces 50 may be oriented at respective, selected angles. Furthermore, it should be understood that FIG. 1A is merely exemplary and that the dimensions and shape as shown in FIG. 1A may vary substantially while still being encompassed by the instant disclosure.

FIG. 2 shows a perspective view of another embodiment of access port 10 according to the instant disclosure. As shown in FIG. 2, the exterior of access port 10 is substantially defined by a generally parallelogram-shaped base (positioned at reference plane 11 as shown in FIGS. 1A and 1B) extending generally pyramidally to a generally parallelogram-shaped upper surface (positioned at reference plane 9 as shown in FIGS. 1A and 1B). As shown in FIG. 2, radiuses 42 may be larger than radiuses 32 as shown in FIG. 1A. Furthermore, the upper topography 61 of access port 10 as shown in FIG. 2 may include rounded corner regions 40 which are larger than rounded corner regions 30 as shown in FIG. 1A. Thus, FIG. 2 shows an exemplary embodiment of an access port 10 that may be perceptibly distinguishable from access port 10 as shown in FIGS. 1A and 1B. For example, a difference between one exterior of an access port contemplated by the instant disclosure and another exterior of a different access port contemplated by the instant disclosure may be determined by way of palpation.

In another embodiment, in another aspect contemplated by the instant disclosure, a template may be employed for perceiving at least one feature of an access port. For instance, a complementarily-shaped template may be positioned over

6

and abutted against an access port contemplated by the instant disclosure so as to determine if the access port matches or substantially corresponds to the shape of the template. Such a process may reliably indicate or perceive at least one feature of an access port contemplated by the instant disclosure. Of course, a plurality of templates corresponding to different models of access ports may be serially engaged with an unknown access port so as to perceive at least one feature thereof. Such a process may allow for identification (e.g., of a model or manufacturer) of an access port contemplated by the instant disclosure.

In another aspect contemplated by the instant disclosure, an upper topography of an access port may include at least one feature for identifying the access port. For example, as shown in FIG. 3, upper surface 60 of access port 10 may be nonplanar. More specifically, upper surface 60 may be tapered or may arcuately extend downwardly (i.e., toward reference plane 11 as shown in FIGS. 1A and 1B) as it extends radially inwardly toward septum 18. Otherwise, access port 10, as shown in FIG. 3, may be configured substantially as described hereinabove with reference to FIGS. 1A and 1B. Thus, upper surface 60 is one exemplary example of at least one perceivable feature for identification of an access port contemplated by the instant disclosure.

In yet a further embodiment of an access port contemplated by the instant disclosure, side regions 54 extending between rounded corner regions 30 may exhibit at least one perceivable feature. For example, as shown in FIG. 4, access port 10 may include one or more side regions 54 that extend arcuately between adjacent rounded corner regions 30. Otherwise, access port 10, as shown in FIG. 4, may be configured substantially as described hereinabove with reference to FIGS. 1A and 1B. Side regions 54 may be congruent or symmetric with respect to one another or, in another embodiment, may be configured differently with respect to one another, without limitation.

FIG. 5 shows a further exemplary embodiment of an access port contemplated by the instant disclosure. More specifically, access port 10, as shown in FIG. 5, includes side regions 54 that form recessed regions 72 between adjacent rounded corner regions 30. Put another way, the upper topography 61 may include alternating recessed regions 72 and protruding regions 70 positioned generally about a periphery of septum 18. Otherwise, access port 10, as shown in FIG. 5, may be configured substantially as described hereinabove with reference to FIGS. 1A and 1B. Such a configuration may provide an access port having at least one identifiable feature.

In a further embodiment of an access port contemplated by the instant disclosure, FIGS. 6A and 6B show a perspective view and a side view, respectively, of an access port 10 generally configured as is described with reference to FIG. 5 but having an elongated body 20E. More specifically, elongated body 20E of access port 10, as shown in FIGS. 6A and 6B, includes a side surface 50E that extends generally from upper topography 61 downwardly (i.e., toward reference plane 11 as shown in FIGS. 1A and 1B) and having a slope (e.g., an angle with respect to a vertical axis normal to an upper surface of septum 18) which is different from the other side surfaces 50. Otherwise, access port 10, as shown in FIG. 6, may be configured substantially as described hereinabove with reference to FIGS. 1A and 1B. Such a configuration may provide an elongated body 20E of an access port 10 having an elongated side portion.

Of course, one or more side surfaces of an access port according to the instant disclosure may be configured for forming a body exhibiting a selected shape as may be desired. An elongated body portion of an access port contemplated by

US 7,785,302 B2

7

the instant disclosure may form, in combination with other features as described hereinabove or, in another embodiment, taken alone, at least one perceivable feature for identification of an access port according to the instant disclosure.

FIG. 7 shows a further embodiment of an access port encompassed by the instant disclosure. Particularly, as shown in FIG. 7, access port 10 may include an upper body portion 20a and a lower body portion 20b. Furthermore, each of upper body portion 20a and lower body portion 20b may exhibit a partial pyramidal shape (i.e., a frustum), wherein the body portions 20a and 20b are stacked vertically with respect to one another. Accordingly, upper body portion 20a may form an overhanging rim feature 76 extending along a periphery of access port 10. Explaining further, lower body portion 20b may have an exterior substantially defined by side surfaces 50b and rounded corner regions 30b, while upper body portion 20a may have an exterior substantially defined by side surfaces 50a, rounded corner regions 30a, and upper topography 61. It may be appreciated that overhanging rim feature 76 may be sized and configured for perception via palpation. Such a configuration may provide a suitable access port for delivery of a beneficial or medicinal substance, the access port being identifiable (e.g., by model number, manufacturer, etc.) after implantation.

It should be understood that the instant disclosure contemplates access ports having an exterior geometry that is not quadrilateral in nature. Rather, the instant disclosure contemplates that an access port may have an exterior which is generally cylindrical, generally conical, generally elliptical, generally oval, or an exterior that is otherwise arcuate in nature. Specifically, the instant disclosure contemplates that an access port having a substantially rounded or arcuate exterior may include at least one feature configured for identification of the access port after implantation. For example, as shown in FIG. 8, shows a cap 14 that exhibits an exterior surface 78 that is substantially conical. Cap 14 may be assembled to a suitable base (not shown) for capturing a septum (not shown) as described hereinabove to form an access port 10 as generally described with reference to FIGS. 1-7.

The instant disclosure further contemplates that at least one protrusion, protruding region, recess, recessed region, undulation, or adjacent features of different elevation may comprise a feature for identifying an access port contemplated by the instant disclosure. More specifically, upper topography 61C, as shown in FIG. 8, may include a plurality of protrusions 80. Protrusions 80 may exhibit partially spherical upper surfaces that transition into a lower portion of cap 14. In further detail, protrusions 80 may be circumferentially spaced about the periphery of septum (not shown) as may be desired. In one embodiment, a plurality of protrusions 80 may be symmetrically circumferentially spaced about the periphery of septum (not shown). More generally, at least one protrusion 80 may be sized, configured, and positioned for forming at least one identifiable feature of an access port. Of course, at least one protrusion 80 may be structured for facilitating comfort of a patient within which the access port is implanted. As may be appreciated, at least one protrusion 80 or more than one protrusion 80 may be included in an upper topography 61C of an access port (not shown) contemplated by the instant disclosure.

FIG. 9 shows another embodiment of a cap 14 including at least one protrusion 80E for forming and identifying an access port contemplated by the instant disclosure after implantation thereof within a patient. Protrusions 80E may extend circumferentially about a center of revolution. Thus, protrusions 80E may exhibit a body 87 portion circumferen-

8

tially extending between rounded ends 83. Further, cap 14 may have an exterior surface 78 that is substantially symmetric about an axis of revolution. More generally, body 20 may extend from a generally circular, generally elliptical, or generally oval base positioned at a lower extent 71 of the cap 14 to an upper generally circular, generally elliptical, or generally oval cross section that is smaller than a cross section of the base and is positioned at an upper extent 73 (without considering protrusions 80E) of the cap 14. In addition, side surface 51, as shown in FIG. 9, extends arcuately between the base and the upper topography 61 of cap 14. Side surface 51 may extend in a generally tapered or conical fashion, may exhibit a radius or other arcuate shape, or may otherwise transition between a cross section of the base of the access port to a cross section proximate the upper topography 61C thereof.

Further, FIG. 10 shows an embodiment of a cap 14 for forming an access port contemplated by the instant disclosure having an upper topography 61C thereof comprising alternating circumferentially extending protrusions 80E and circumferentially extending recesses 82, wherein the circumferentially extending protrusions 80E are circumferentially larger than the circumferentially extending recesses 80E. In another embodiment of an access port contemplated by the instant disclosure, FIG. 11 shows a perspective view of a cap 14 having an upper topography 61C thereof comprising alternating circumferentially extending protrusions 80E and circumferentially extending recesses 82, wherein the circumferentially extending protrusions 80E and the circumferentially extending recesses 82 are substantially equal in (circumferential) sized or extension. In yet a further embodiment of a cap 14 for forming an access port contemplated by the instant disclosure, FIG. 12 shows a perspective view of a cap 14 having an upper topography 61C thereof comprising three circumferentially extending protrusions 80E and three circumferentially extending recesses 82, arranged so as to alternate circumferentially, wherein the circumferentially extending protrusions 80E and the circumferentially extending recesses 82 are substantially equal in (circumferential) size.

FIG. 13 shows a perspective view of an additional embodiment of an cap 14 for forming an access port contemplated by the instant disclosure including an upper topography 61C including circumferentially extending protrusions 80T and circumferentially extending recesses 82T, wherein transition regions 81 are provided between circumferentially extending protrusions 80T and circumferentially extending recesses 82T. Such transition regions 81, as shown in FIG. 13, may taper or generally smoothly transition between a circumferentially extending protrusion 80T and a circumferentially extending recess 82T. Also, FIG. 14 shows a perspective view of an additional embodiment of a cap 14 for forming an access port contemplated by the instant disclosure including an upper topography 61C including protrusion regions 96 and recessed regions 98 that transition between one another and alternate circumferentially so as to form an undulating topography comprising upper topography 61C. Such an undulating topography, as shown in FIG. 14, generally smoothly transitions between circumferentially adjacent protrusion regions 96 and recessed regions 98.

In a further embodiment of an access port contemplated by the instant disclosure, FIG. 15A and 15B show a perspective view and a top elevation view, respectively, of an access port 10 generally configured as is described with reference to FIG. 5 but may include at least one nonplanar side surface. In another embodiment, access port 10 as shown in FIG. 15 may be configured as shown in FIGS. 1-4 or FIGS. 6-7, or any embodiments described hereinbelow, without limitation.

US 7,785,302 B2

9

More specifically, elongated body **20** of access port **10**, as shown in FIGS. **15A** and **15B**, includes three side surfaces **50R** that extend arcuately (as shown in FIG. **15B**). Such a configuration may provide an access port **10** that is identifiable subsequent to implantation. In yet another embodiment of an access port contemplated by the instant disclosure, FIG. **16** shows a perspective view of an access port **10** including a side wall **100** that truncates a portion of a radius **32** formed between side surfaces **50** of access port **10**. It may also be noted that such an access port **10** may include three suture apertures **66**, which may, taken alone or in combination with at least one other feature, comprise at least one identifiable feature of an access port contemplated by the instant disclosure. In addition, as shown in FIG. **16**, outlet stem **31** may extend from side wall **100**.

In a further embodiment of an access port contemplated by the instant disclosure, FIG. **17** shows a perspective view of an access port **10** wherein cap **14** and base **16**, when assembled to one another along mating line **15**, form a flange feature or lip feature **102** that extends about at least a portion of the periphery of the access port **10**. As shown in FIG. **17**, lip feature **102** extends substantially about the periphery of the access port **10**, proximate to the mating line **15** between cap **14** and base **16**. Such a feature may comprise at least one identifiable feature of an access port contemplated by the instant disclosure. Thus, it may be appreciated that a peripheral discontinuity between the cap **14** and base **16** may be formed generally along the mating line **15** therebetween. In the embodiment of an access port as shown in FIG. **7**, an overhanging rim feature **76** may comprise a peripheral discontinuity or, in the embodiment of an access port as shown in FIG. **17**, a lip feature **102** may comprise a peripheral discontinuity.

In a further embodiment of an access port contemplated by the instant disclosure, FIG. **18** shows a perspective view of an access port **10** wherein at least a portion of at least one side surface **50** is concave. As shown in FIG. **18**, concave region **106** of side surface **50** is concave. Concavity (i.e., a concave region **106**) may be exhibited over at least a portion of a side surface of an access port of any of the embodiments as shown herein, without limitation. Thus, at least one side surface **50** of an access port contemplated by the instant disclosure having at least at least a portion thereof that is concave is one exemplary example of at least one perceivable feature for identification of an access port contemplated by the instant disclosure.

In a further embodiment of an access port contemplated by the instant disclosure, FIG. **18** shows a perspective view of an access port **10** wherein at least a portion of at least one side surface **50** is concave. As shown in FIG. **18**, region **106** of side surface **50** is concave. Concavity may be exhibited over at least a portion of a side surface of an access port of any of the embodiments as shown herein, without limitation. Thus, at least one side surface **50** of an access port contemplated by the instant disclosure having at least at least a portion thereof that is concave is one exemplary example of at least one perceivable feature for identification of an access port contemplated by the instant disclosure.

In a further embodiment of an access port contemplated by the instant disclosure, FIG. **19** shows a perspective view of an access port **10** generally configured as is described with reference to FIG. **6A** and **6B**. More specifically, elongated body **20ER**, as shown in FIG. **19** includes a side surface **50ER** that extends arcuately from upper topography **61** of access port **10** downwardly (i.e., toward reference plane **11** as shown in

10

FIGS. **1A** and **1B**). Such a configuration may provide an elongated body **20E** of an access port **10** having an elongated side portion.

It should be understood from the above-described various embodiments of an access port contemplated by the instant disclosure that many variations, additions, or different features may be encompassed by the instant disclosure. Thus, the instant disclosure is not limited to the several above-described exemplary embodiments.

For example, as shown in FIG. **20**, which shows a top elevation view of an access port **10** contemplated by the instant disclosure, an access port **10** may include a side wall **100** that at least partially truncates a radius **32** between side surfaces **50**, outlet stem **31** extending from side wall **100**, and at least one of a concave region **106** and an arcuate surface **50R**. Further, as shown in FIG. **20**, suture apertures **66** may be positioned so as to identify the access port **10** after subcutaneous implantation.

Additionally, the instant disclosure contemplates access ports having an exterior geometry that is polygonal in nature. Specifically, the instant disclosure contemplates that an access port contemplated by the instant disclosure may exhibit a generally triangular exterior. Thus, as shown in FIG. **21**, body **20** may exhibit a generally pyramidal or tapered shape (i.e., a polygonal base having surfaces for each side of the polygon extending toward a common vertex). Generally, a body **20T** of an access port **10** may extend between a generally triangularly-shaped base and a relatively smaller, generally triangularly-shaped upper base. Accordingly, the exterior of access port **10** may be substantially defined by three side surfaces (e.g., **50**, **50R**, **102**, **50E**) having radiuses **32** extending therebetween. In addition, the upper topography **61** of access port **10** may be defined by upper surface **60** in combination with side regions **54** and rounded corner regions **30**. Such a configuration may provide an access port having at least one feature that may be perceived by palpation.

FIGS. **22** and **23** show a perspective view and a top elevation view of another embodiment of an access port including a generally triangular exterior geometry. More particularly, as shown in FIGS. **22** and **23**, a cap **14** and base **16** (collectively forming a housing) may capture a septum **118** to form an access port **10**. Further, outlet stem **31** may include a stem base that may be positioned within and sealed to an outlet recess **93** formed within base **16**. The outlet stem **31** may be in fluid communication with a cavity formed within the access port **10**. Optionally, suture plugs **89** may be positioned within suture cavities **91** formed in base **16**. Suture plugs **89** may comprise a pliant material (e.g., silicone, rubber, etc.) that may provide some resilience between sutures coupling the access port **10** (i.e., the base **16**) to a patient. In further detail, a side periphery **95** (e.g., one or more side walls) of access port **10** may be generally triangular. Thus, cap **14** and base **16** may collectively form a generally triangular housing or body of access port **10**. Also, the instant disclosure contemplates that side periphery **95** may increase or decrease in cross-sectional size (e.g., by tapering or arcuately transforming) between upper surface **161** of cap **14** and lower surface **151** of base **16**. As shown in FIGS. **22** and **23**, a transverse cross section (taken in a selected plane substantially parallel to lower surface **151** of base **16**) of access port **10** may be larger proximate to lower surface **151** of base **16** and may be relatively smaller proximate upper surface **161** of cap **14**.

Additionally, FIG. **24** shows a simplified representation of a transverse cross section of access port **10**. As shown in FIG. **24**, side periphery **95** of access port **10** may define three side regions **103** that extend between associated vertex regions **101**. In addition, in one embodiment and as shown in FIG. **24**,

US 7,785,302 B2

11

side periphery **95** may define a substantially equilateral generally triangular shape. As one of ordinary skill in the art will appreciate, side regions **103** may arcuately extend between associated vertex regions **101**; thus, side regions **103** may form “sides” of a generally triangular shape. Further, although vertex regions **101** are rounded, it may be appreciated that such vertex regions **101** form an intersection between adjacent side regions **103**. Accordingly, one of ordinary skill in the art will appreciate that the phrase “generally triangular,” as used herein, encompasses any generally three-sided geometry wherein adjacent sides intersect, without limitation. For example, the phrase “generally triangular” encompasses three sided polygons, circular triangles, equilateral triangles, etc., without limitation.

The instant disclosure also contemplates that at least one feature of an access port contemplated by the instant disclosure may not be observable visually or by palpation but, rather, may be otherwise observable. For example, the instant disclosure contemplates that at least one feature of an access port may be observable through interaction with an imaging technology such as x-ray or ultrasound. For example, in one embodiment, a metal feature (e.g., a plate or other metal geometry) may be included by an access port contemplated by the instant disclosure. As may be appreciated, such a metal feature may be represented on an x-ray generated by exposure of the access port to x-ray energy while simultaneously exposing x-ray sensitive film to x-ray energy passing through the access port. Further, the instant disclosure contemplates that a size, shape, or both size and shape of a metal feature of an access port may be configured for enhancing identification of an access port. For example, assuming that a metal feature comprises a metal plate, a size, shape, or both may be selectively tailored for identification of an access port. Similarly, a feature of an access port contemplated by the instant disclosure may be tailored for detection via ultrasound interaction. Such a feature may comprise an exterior topographical feature. In another embodiment, such a feature may comprise a composite structure including two or more materials that form an interface surface that may be identified by ultrasound imaging.

The instant disclosure also contemplates that at least one feature of an access port contemplated by the instant disclosure may not be observable visually or by palpation but, rather, may be otherwise observable. For example, the instant disclosure contemplates that at least one feature of an access port may be observable through interaction with an imaging technology such as x-ray or ultrasound. The access port may be constructed of both metal and plastic. For example, in one embodiment, a metal feature (e.g., a plate or other metal geometry) may be included by an access port contemplated by the instant disclosure. As may be appreciated, such a metal feature may be represented on an x-ray generated by exposure of the access port to x-ray energy while simultaneously exposing x-ray sensitive film to x-ray energy passing through the access port. In another embodiment, the access port may incorporate a metal disk in the bottom of the plastic port. The disk may include an alphanumeric message etched in the port disk that would be visible on radiograph (x-ray). FIGS. **52A-B** illustrate one embodiment of an alphanumeric message **122** etched in a disk or plate **120** in the bottom of a port **10**. Further, the instant disclosure contemplates that a size, shape, or both size and shape of a metal feature of an access port may be configured for enhancing identification of an access port. For example, assuming that a metal feature comprises a metal plate, a size, shape, or both may be selectively tailored for identification of an access port. Additionally, by way of example, a metal port may be configured to leave a

12

square imprint on an x-ray that could identify the port as a power-injectable port. Similarly, a feature of an access port contemplated by the instant disclosure may be tailored for detection via ultrasound interaction. Such a feature may comprise an exterior topographical feature. In another embodiment, such a feature may comprise a composite structure including two or more materials that form an interface surface that may be identified by ultrasound imaging.

In one exemplary example, it is contemplated that radio frequency identification technology may be employed for identification of an access port contemplated by the instant disclosure. Particularly, so-called active RFID tags are powered by an internal battery and are typically read/write devices. Currently, a suitable cell coupled to suitable low power circuitry can ensure functionality for as long as ten or more years, depending upon the operating temperatures and read/write cycles and usage. So-called passive RFID tags operate without a separate external power source and obtain operating power generated from the reader. Passive RFID tags are typically programmed with a unique set of data (usually 32 to 128 bits) that cannot be modified. Read-only tags may operate as an identifier comparable to linear barcodes which may contain selected product-specific information. Thus, passive RFID tags may be much lighter than active RFID tags, less expensive, and may offer a virtually unlimited operational lifetime. The tradeoff is that they have shorter read ranges than active tags and require a higher-powered reader.

One advantage of RFID approach is the noncontact, non-line-of-sight nature of the technology. Tags can be read through a variety of substances such as snow, fog, ice, paint, crusted grime, and other visually and environmentally challenging conditions, where other optically read technologies may be less effective. RFID tags can also be read in challenging circumstances at rapid speeds, in most cases responding in less than about 100 milliseconds.

While certain representative embodiments and details have been shown for purposes of illustrating aspects contemplated by the instant disclosure, it will be apparent to those skilled in the art that various changes in the methods and apparatus disclosed herein may be made without departing from the scope contemplated by the instant disclosure, which is defined in the appended claims. For example, other access port sizes and shapes may be employed; and various other embodiments and structures may be employed for forming at least one identifiable feature of an access port contemplated by the instant disclosure. In particular, FIGS. **25-51** illustrate a number of additional exemplary embodiments of access port **10**. As is apparent from these figures, access port **10** may be formed in any number of shapes and sizes, such that any number of modifications and changes are possible to any of the embodiments described and illustrated herein without departing from the spirit and scope of the instant disclosure.

What is claimed is:

1. A venous access port assembly for implantation into a patient, comprising:

a housing having a discharge port, a needle-penetrable septum, and a cap securable to the housing and retaining the septum securely in the assembly, the housing having a housing base defining a bottom wall of at least one reservoir, and an outwardly facing bottom surface,

the housing base including radiopaque alphanumeric characters that convey to a practitioner that the venous access port assembly is power injectable when an X-ray of the patient is taken after implantation.

US 7,785,302 B2

13

- 2. The assembly of claim 1, wherein the radiopaque alphanumeric message is applied to a surface of the housing base.
- 3. The assembly of claim 1 wherein the radiopaque alphanumeric message is applied to the outwardly facing bottom surface of the housing base.
- 4. The assembly of claim 1, wherein the radiopaque alphanumeric characters include the letters “C” and “T”.
- 5. A venous access port assembly for implantation into a patient, comprising:
 - a housing having an outlet, and
 - a needle-penetrable septum, the needle-penetrable septum and the housing together defining a reservoir,wherein:
 - the assembly includes a radiopaque alphanumeric message observable through interaction with X-rays subsequent to subcutaneous implantation of the assembly, and
 - the alphanumeric message indicating that the assembly is power injectable.
- 6. The assembly of claim 5, wherein the alphanumeric message includes an abbreviation for computed tomography.
- 7. The assembly of claim 5, wherein the alphanumeric message is applied to the exterior of the assembly.

14

- 8. A venous access port assembly for implantation into a patient, comprising:
 - a housing and a needle-penetrable septum together defining a reservoir; and
 - the housing including an outlet and a radiopaque alphanumeric message observable through interaction with X-rays subsequent to subcutaneous implantation of the assembly into the patient, the radiopaque alphanumeric message identifying the venous access port assembly as suitable for power injection.
- 9. The assembly of claim 8, wherein the radiopaque alphanumeric message includes “C” and “T”.
- 10. A venous access port assembly for implantation into a patient, comprising:
 - a housing and a needle-penetrable septum together defining a reservoir; and
 - the housing including radiopaque markings including the alphanumeric message “CT” that conveys to a practitioner when an X-ray of the patient is taken after implantation that the venous access port assembly is suitable for power injection.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,785,302 B2
APPLICATION NO. : 11/368954
DATED : August 31, 2010
INVENTOR(S) : Kelly B. Powers et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the issued patent, Column 11, delete paragraph consisting of line numbers 15-40.

Signed and Sealed this
Nineteenth Day of July, 2011

A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive, flowing style.

David J. Kappos
Director of the United States Patent and Trademark Office